

APPENDIX H

SETTLEMENT ANALYSES FOR SCA

GEOSYNTEC CONSULTANTS

COMPUTATION COVER SHEET

Client: Honeywell Project: Onondaga Lake SCA Final Project/Proposal #: GJ4299 Task #: 04

TITLE OF COMPUTATIONS

SETTLEMENT ANALYSES FOR SCA

COMPUTATIONS BY:

Signature

Yiwen Cao

1/12/10

DATE

Printed Name

Yiwen Cao

and Title

Project Engineer

ASSUMPTIONS AND PROCEDURES

CHECKED BY:

(Peer Reviewer)

Signature

R. Kulasingam

2/12/2010

DATE

Printed Name

R. Kulasingam

and Title

Project Engineer

COMPUTATIONS CHECKED BY:

Signature

Joseph Sura

1/12/2010

DATE

Printed Name

Joseph Sura

and Title

Staff Engineer

COMPUTATIONS

BACKCHECKED BY:

(Originator)

Signature

Yiwen Cao

1/12/10

DATE

Printed Name

Yiwen Cao

and Title

Project Engineer

APPROVED BY:

(PM or Designate)

Signature

Jay Beech

12 JAN 2010

DATE

Printed Name

Jay Beech

and Title

Principal

APPROVAL NOTES:

REVISIONS (Number and initial all revisions)

NO.

SHEET

DATE

BY

CHECKED BY

APPROVAL

_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: Honeywell Project: Onondaga Lake SCA Final Design Project/ Proposal No.: GJ4299 Task No.: 04

SETTLEMENT ANALYSES FOR SCA

PURPOSE

This package was prepared in support of the design of the Sediment Consolidation Area (SCA) for the Onondaga Lake Bottom Site, which will be constructed on Wastedbed 13. The location of the SCA on Wastedbed 13 is shown in Figure 1. Specifically, the purpose of this package is:

- (i) to calculate foundation settlement of the existing Solvay waste (SOLW) due to liner system and geotextile tube (geo-tube) placement, and to calculate the settlement of the dredge material inside the geo-tubes before cover placement (i.e., capping);
- (ii) to calculate additional foundation and dredge material settlement after capping;
- (iii) to estimate the post-settlement grades in the east and west sumps to confirm that positive drainage towards the sumps will be maintained during operations, closure, and post-closure; and
- (iv) to estimate the post-settlement grades for the liner system and the cover system, and to estimate tensile strains for the liner system. The performance of the liner system and the final cover system is then evaluated to verify that:
 - a. positive drainage is maintained towards the liquids management collection sumps;
 - b. positive drainage is maintained on the final cover surface; and
 - c. maximum tensile strains in the liner geosynthetic components do not exceed the maximum allowable tensile strains.

METHODOLOGY

Consolidation Settlement

Settlements of the SOLW and the dredge material in geo-tubes were calculated using equations for conventional one-dimensional (1-D) consolidation theory used in

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: Honeywell Project: Onondaga Lake SCA Final Design Project/ Proposal No.: GJ4299 Task No.: 04

geotechnical engineering [Holtz and Kovacs, 1981]. Settlements of the SOLW and dredge material in geo-tubes are caused by the following mechanisms:

- primary compression of the SOLW and the dredge material in geo-tubes due to overburden loading imposed by the SCA perimeter dikes, the liner system, the dredge material, and the final cover system; and
- secondary compression resulting from the plastic realignment of the fabric (i.e., creep) of SOLW and the dredge material in geo-tubes under the sustained loading.

The general forms of the settlement equations are given below:

Primary Settlement

$$S_p = C_{r\varepsilon} H \log \left(\frac{\sigma'_{vo} + \Delta \sigma'_v}{\sigma'_{vo}} \right) \quad \text{for } \sigma'_{vo} + \Delta \sigma'_v \leq \sigma'_p \dots\dots\dots (1)$$

$$S_p = C_{r\varepsilon} H \log \left(\frac{\sigma'_p}{\sigma'_{vo}} \right) + C_{c\varepsilon} H \log \left(\frac{\sigma'_{vo} + \Delta \sigma'_v}{\sigma'_p} \right) \quad \text{for } \sigma'_{vo} \leq \sigma'_p \text{ and } \sigma'_{vo} + \Delta \sigma'_v > \sigma'_p \dots\dots\dots (2A)$$

$$S_p = C_{c\varepsilon} H \log \left(\frac{\sigma'_{vo} + \Delta \sigma'_v}{\sigma'_{vo}} \right) \quad \text{for } \sigma'_{vo} \geq \sigma'_p \dots\dots\dots (2B)$$

Secondary Settlement

$$S_s = C_{\alpha\varepsilon} H \log \left(\frac{t_2}{t_1} \right) \dots\dots\dots (3)$$

Total Settlement

$$S = S_p + S_s \dots\dots\dots (4)$$

Where,

- S_p = primary settlement;
- S_s = secondary settlement;
- S = total settlement;
- $C_{c\varepsilon}$ = modified compression index;
- $C_{r\varepsilon}$ = modified recompression index;

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: Honeywell Project: Onondaga Lake SCA Final Design Project/ Proposal No.: GJ4299 Task No.: 04

$C_{\alpha\epsilon}$ = modified secondary compression index;

H = initial thickness of compressible layer;

σ'_{vo} = initial effective overburden stress;

σ'_p = preconsolidation pressure;

$\Delta\sigma'_v$ = increase in effective stress due to the loadings;

t_1 = time for completion of primary compression (assumed 0.5 years in this analysis).
The time for completion of primary compression was estimated to range from several months (based on field settlement pilot study) to several years (based on laboratory consolidation tests). For the purpose of this calculation package, the time for completion of primary compression was assumed to be 0.5 years; and

t_2 = time when settlement due to secondary compression is computed (i.e., assuming 4 years to place geo-tubes, 1 year to place cover, and 30 years after closure, the t_2 is assumed to be 35 years for this analysis).

It is noted that the foundation and dredge material settlements were calculated for two time periods, at the time of closure (i.e., after geo-tube placement is complete but before the final cover has been constructed) and 30 years after closure.

During the operating period of 4 years, the foundation settlement was calculated assuming that all phases of geo-tubes were placed at the beginning of operations. The dredge material settlement was calculated assuming that the geo-tubes were placed on a yearly basis for 4 years (i.e., a quarter of the geo-tubes were placed at the beginning of year 1; a quarter of the tubes were placed at the beginning of year 2; etc.). For purposes of this analysis, a 4-year geo-tube placement approach was assumed so that the settlement due to the placement of geo-tubes on top of previously-placed geo-tubes could be incorporated into the calculations. The actual geo-tube phasing will be developed based on many considerations, including operational needs, observations during operations, etc.

For the after capping settlement calculations, the deformed geometry of the liner system, SCA perimeter dike, and the geo-tubes computed from the settlement analyses at closure (i.e., before cover placement) became the initial geometry. The proposed final cover system loading was assumed to be placed at the beginning of year 5. The foundation and dredge material settlement after closure was calculated due to the placement of the proposed final cover. The continued secondary settlement of foundation and dredge material due to the placement of the liner system, dike, and geo-tubes was also incorporated into the settlement evaluation.

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: Honeywell Project: Onondaga Lake SCA Final Design Project/ Proposal No.: GJ4299 Task No.: 04

Settlement Computation Model

Foundation and cover settlements were calculated using two different models, the surface settlement model (SSM) and the cross-section settlement model (CSM). The SSM produces post-settlement elevation and settlement (i.e., isopach) contour maps for a deformed surface. The CSM produces similar results along a cross section. The main difference between SSM and CSM is that the CSM considers the load-induced stress distribution within the foundation SOLW and the dredge material in geo-tubes while the SSM does not. CSM also models the geometries of the outermost geo-tubes as a series of vertical terraces to mimic the actual shape, while SSM models the outermost geo-tubes as a smooth surface using the composite slopes. The post-settlement contour maps produced using the SSM were used to evaluate: (i) whether positive drainage is maintained towards the east and west sumps; and (ii) whether positive drainage is maintained in the liner system and the final cover system. The post-settlement section figures produced using the CSM were used to evaluate the maximum strain in the geosynthetic components.

Surface Settlement Model (SSM)

Foundation and dredge material settlement based on SSM was calculated using EXCEL[®] spreadsheets. The details regarding loading and timing for the SSM calculations are provided in subsequent sections. A general summary of the steps used to perform the settlement calculations is presented as follows:

- Step 1. Calculation points (approximately 2,300 for this analysis) were selected within the SCA footprint in order to represent the geometries of various surfaces (e.g., low permeability soil layer [LPSL]). For each calculation point, the northing, easting, and the elevation values of various surfaces were selected and stored.
- Step 2. For each calculation point, the subsurface profile beneath the liner system (i.e., the SOLW) and the dredge material above the liner system were identified and broken into distinct layers (i.e., sub-layers) of specific thickness and material properties, and the center elevation of each sub-layer was identified.
- Step 3. The initial effective vertical stress, the increase in the effective vertical stress, and the final effective vertical stress were calculated at the center of each sub-layer in the SOLW and dredge material in geo-tubes for each of the loadings described in subsequent sections.

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: Honeywell Project: Onondaga Lake SCA Final Design Project/ Proposal No.: GJ4299 Task No.: 04

- Step 4. Using Equations 1 through 4, the settlements for each sub-layer in SOLW were calculated. The total foundation settlement at a calculation point was found by summing the contribution of the settlement from each of the SOLW sub-layers beneath the bottom of the liner system.
- Step 5. Post-settlement elevations of each SOLW sub-layer were obtained by subtracting the corresponding foundation settlement from its corresponding pre-settlement elevation.
- Step 6. Using Equations 1 through 4, the settlement for each dredge material sub-layer within the geo-tubes was calculated. The total settlement of the geo-tube surface at a calculation point was found by summing the contribution of the total foundation settlement and the settlement from each of the dredge material sub-layers within the geo-tubes.
- Step 7. Post-settlement elevations of each surface were obtained by subtracting the settlement from the pre-settlement elevation at each point.
- Step 8. Post-settlement elevation or settlement isopach contour maps were created using the post-settlement or elevation data from all calculation points for the surface of concern.

Cross-section Settlement Model (CSM)

Since CSM can consider the Boussinesq stress distribution in the modeling layers, it is more accurate than SSM at modeling post-settlement strain along the liner system. Foundation and dredge material settlements based on CSM were calculated using EXCEL[®] spreadsheets. The steps for CSM are generally the same or similar to those for SSM and are presented as follows:

- Step 1. Similar, but only a series of calculation points were taken from a cross section line. For the two cross-sections analyzed in this package, the number of calculation points ranged between 90 and 100.
- Step 2. Same.
- Step 3. Similar, except the increase in effective vertical stress was computed separately by considering the stress distribution based on Boussinesq theory.
- Step 4. Same.
- Step 5. Same.

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: Honeywell Project: Onondaga Lake SCA Final Design Project/ Proposal No.: GJ4299 Task No.: 04

Step 6. Same.

Step 7. Same.

Step 8. Pre- and post-settlement top of base liner elevations between a pair of adjacent calculation points were used to assess the pre- and post-settlement length of the liner between the two calculation points. The difference in length relative to the initial length between the calculation points was used to assess the calculated incremental strain in the liner system according to the following equation:

$$\varepsilon = \frac{L_0 - L_f}{L_0} \times 100 \text{ (percent)} \dots\dots\dots (5)$$

Where:

- ε = strain in the liner system (- indicates tension, + indicates compression);
- L_f = final length between calculation points based on post-settlement elevations; and
- L_0 = initial length between calculation points based on pre-settlement elevations.

The estimated tensile strains were compared to the conservatively recommended allowable tensile strain of 5% [Berg and Bonaparte, 1993] for the liner system geomembrane.

Tensile Strain Adjustment

The post-settlement liner tensile strain was evaluated for two time periods, at closure (before cover placement) and 30 years after closure. The calculated tensile strains at 30 years after closure are based on the liner condition at closure; however, the liner segments may already have been stretched during the operations period. Therefore, the calculated tensile strains at 30 years after closure need to be adjusted to include additional tensile strains during the operations period.

Assuming ε_1 and ε_2 represent the tensile strains calculated for the operations and post-closure periods, respectively.

$$\varepsilon_1 = \frac{L_0 - L_1}{L_0} = 1 - \frac{L_1}{L_0}, \quad \frac{L_1}{L_0} = 1 - \varepsilon_1 \dots\dots\dots (6)$$

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: Honeywell Project: Onondaga Lake SCA Final Design Project/ Proposal No.: GJ4299 Task No.: 04

$$\varepsilon_2 = \frac{L_1 - L_2}{L_1} = 1 - \frac{L_2}{L_1}, \quad \frac{L_2}{L_1} = 1 - \varepsilon_2 \dots\dots\dots (7)$$

Where:

L_0 = initial length between calculation points based on pre-settlement elevations;

L_1 = final length between calculation points based on post-settlement elevations at closure;

L_2 = final length between calculation points based on post-settlement elevations 30 years after closure;

Assuming ε'_2 represent the adjusted post-closure tensile strains.

$$\varepsilon'_2 = \frac{L_0 - L_2}{L_0} = 1 - \frac{L_2}{L_0} = 1 - \frac{L_2}{L_1} \times \frac{L_1}{L_0} \dots\dots\dots (8)$$

Substituting Equations 6 and 7 into Equation 8:

$$\begin{aligned} \varepsilon'_2 &= 1 - (1 - \varepsilon_2) \times (1 - \varepsilon_1) \\ &= 1 - 1 + \varepsilon_1 + \varepsilon_2 - \varepsilon_1 \varepsilon_2 \\ &= \varepsilon_1 + \varepsilon_2 - \varepsilon_1 \varepsilon_2 \dots\dots\dots (9) \end{aligned}$$

Since ε_1 and ε_2 are typically relatively small numbers (i.e., couple of percent), the term $\varepsilon_1 \varepsilon_2$ is very small and can be removed from Equation 9. Thus, Equation 9 can be simplified as:

$$\varepsilon'_2 = \varepsilon_1 + \varepsilon_2 \dots\dots\dots (10)$$

Secondary Settlement Time Ratio

The secondary settlement components of the foundation and dredge material settlements were calculated for two time periods, at closure (before cover placement) and 30 years after closure. For the post-closure period, the calculated secondary settlement represents additional secondary settlement after closure.

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: Honeywell Project: Onondaga Lake SCA Final Design Project/ Proposal No.: GJ4299 Task No.: 04

Foundation SOLW

For the foundation SOLW, there are two loadings considered in the settlement analyses. The first one is the liner system and dredge material in geo-tubes loading placed at the beginning of the operations period (i.e., beginning of year 1), and the second one is the proposed final cover loading placed at closure (beginning of year 5). For each sub-layer in the foundation SOLW, it is assumed that the secondary settlement during the post-closure period is a continuation of the secondary settlement triggered by the placement of the dredge material in the geo-tubes. In other words, the secondary settlement during the post-closure period was assumed to not restart due to the placement of the proposed final cover.

Therefore, the additional secondary settlement during the post-closure period can be calculated as:

$$S_{post-closure} = C_{\alpha\epsilon} H \log\left(\frac{T_3}{T_1}\right) - C_{\alpha\epsilon} H \log\left(\frac{T_2}{T_1}\right) \dots\dots\dots (11)$$

Where:

- $S_{post-closure}$ = additional secondary settlement during the post-closure period;
- $C_{\alpha\epsilon}$ = modified secondary compression index;
- H = initial thickness of compressible layer;
- T_1 = time for completion of primary compression (assumed 0.5 year);
- T_2 = time at closure (assumed 4 years); and
- T_3 = time 30 years after closure (assumed 35 years).

Equation 11 can be reorganized as:

$$\begin{aligned} S_{post-closure} &= C_{\alpha\epsilon} H \left[\log\left(\frac{T_3}{T_1}\right) - \log\left(\frac{T_2}{T_1}\right) \right] \\ &= C_{\alpha\epsilon} H [\log(T_3) - \log(T_1) - \log(T_2) + \log(T_1)] \\ &= C_{\alpha\epsilon} H [\log(T_3) - \log(T_2)] \\ &= C_{\alpha\epsilon} H \log\left(\frac{T_3}{T_2}\right) \dots\dots\dots (12) \end{aligned}$$

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: Honeywell Project: Onondaga Lake SCA Final Design Project/ Proposal No.: GJ4299 Task No.: 04

Observing Equations 11 and 12, the secondary settlement during the post-closure period can be calculated in one step per Equation 12 instead of in two steps per Equation 11. Comparing Equations 3 and 12, it can be assumed that the equivalent t_2/t_1 ratio in Equation 3 can be expressed as T_3/T_2 (i.e., $35/4=8.75$) for secondary settlement of foundation SOLW.

Dredge Material in Geo-tubes

For the settlement of dredge material in geo-tubes, it was assumed that the geo-tubes were placed on a yearly basis for four years (i.e., a quarter of the geo-tubes were placed at the beginning of year 1; a quarter of the tubes were placed at the beginning of year 2; etc.). Per Equation 12, the equivalent time ratios can be calculated as $35/4$ (8.75) for year 1 geo-tubes, $34/3$ (11.33) for year 2 geo-tubes, $33/2$ (16.5) for year 3 geo-tubes, and $32/1$ (32) for year 4 geo-tubes.

ANALYSIS CASES

The following cases were analyzed using the SSM:

- CASE 1: Settlement analysis for top of LPSL at the end of the operations period (i.e., end of year 4);
- CASE 2: Settlement analysis for top of dredge material in geo-tubes at the end of the operations period (i.e., end of year 4);
- CASE 3: Settlement analysis for top of LPSL 30 years after closure (i.e., end of year 35);
- CASE 4: Settlement analysis for top of final cover 30 years after closure (i.e., end of year 35);

The following cases were analyzed using the CSM:

- CASE 5: Settlement analysis for top of LPSL at the end of the operations period (i.e., end of year 4) along two cross sections [Figure 1];
- CASE 6: Settlement analysis for top of dredge material in geo-tubes at the end of the operations period (i.e., end of year 4) along two cross sections [Figure 1]; and

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: Honeywell Project: Onondaga Lake SCA Final Design Project/ Proposal No.: GJ4299 Task No.: 04

CASE 7: Settlement analysis for top of LPSL 30 years after closure (i.e., end of year 35) along two cross sections [Figure 1].

SUBSURFACE STRATIGRAPHY

Detailed information regarding the subsurface stratigraphy was presented in a calculation package titled “*Subsurface Stratigraphy Model of Wastedbed 13 for the Design of Sediment Consolidation Area*” (referred to as the Data Package). In summary, the subsurface stratigraphy consists primarily of three types of material: the SOLW, the dike soil, and the foundation soil, as shown schematically in Figure 2. The SOLW was divided into three zones (i.e., Zone 1, Zone 2, and Zone 3, as shown in Figure 2) based on the distinctive characteristics of each zone.

The groundwater table was assumed to be at elevation 375 ft as presented in the Data Package.

MATERIAL PROPERTIES

Detailed information regarding the material properties (i.e., unit weight and/or compressibility parameters) of the SOLW and the Wastedbed 13 perimeter dike soil was also presented in the Data Package. The unit weight of the dredge material was estimated to be approximately 86 pcf based on lab results. The compressibility parameters of the dredge material are calculated and presented in Attachment 1 of this package. The unit weights of the soil liner, gravel drainage layer, and the final cover system were assumed to be 120 pcf.

Table 1 summarizes the material properties of the SOLW, soil liner, gravel layer, dredge material, final cover, and SCA perimeter dike soil.

SETTLEMENT CALCULATION SURFACES AND CROSS SECTIONS

Surface Settlement Model (SSM)

The pre-settlement grading plans of various SCA surfaces needed in the SSM (including from bottom to top: bottom of foundation SOLW, bottom of LPSL [i.e., existing grade], top of LPSL, top of gravel, and the potential top of geo-tube year 1, top of geo-tube year 2, top of geo-tube year 3, and top of geo-tube year 4 surfaces) are presented in Figures 3 through 10. The locations of the 2,300+ settlement calculation points are shown in

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: Honeywell Project: Onondaga Lake SCA Final Design Project/ Proposal No.: GJ4299 Task No.: 04

Figure 11. These calculation points were used to represent modeling surfaces. The pre-settlement proposed final cover grading plan was developed based on the deformed (i.e., settled) shape of the top of geo-tube year 4 surface; therefore, it includes settlement due to liner and geo-tube placement but not final cover placement. The proposed final cover surface was designed to provide positive drainage of surface water with a minimum of 0.5% slope and a thickness of approximately 33 inches on top of the geo-tubes (i.e., 3-inch leveling layer, 24-inch protection soil layer, and 6 inches of topsoil).

Cross-section Settlement Model (CSM)

Two Cross Sections, A and B, were analyzed using the CSM. The locations of Cross Sections A and B are shown in Figure 1.

RESULTS

Surface Settlement Model (SSM)

CASE 1

The settlement isopach and post-settlement elevation maps for the top of LPSL (or bottom of gravel layer) at the end of operations period (i.e., end of year 4) are shown in Figures 12 and 13, respectively. The estimated settlement includes primary and secondary settlement of SOLW that occurred between the beginning of year 1 and the end of year 4. Per Figure 12, within the top deck area, the majority of the settlements are approximately 9 ft to 11 ft with the area above the subsurface berm having settlements ranging from 5 ft to 8 ft. Figure 13 indicates that the gravel layer functions as needed at the end of operations period (i.e., end of year 4) because there is no slope reversal or local ponding and liquid can freely drain towards the two collection sump areas. The spreadsheet output for settlement analysis for 10 representative calculation points (i.e., 1001 through 1010) is presented in Attachment 2. The locations of calculation points 1001 through 1010 are shown in Figure 11.

CASE 2

The settlement isopach and post-settlement elevation maps for the top of geo-tubes at the end of operations period (i.e., end of year 4) are shown in Figures 14 and 15, respectively. The estimated settlement includes primary and secondary settlement of

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: Honeywell Project: Onondaga Lake SCA Final Design Project/ Proposal No.: GJ4299 Task No.: 04

dredge material in geo-tubes that occurred between the beginning of year 1 and the end of year 4. Per Figure 14, within the top deck area, the majority of the settlements are approximately 9 ft to 14 ft with the area above the subsurface berm having settlements ranging from 5 ft to 9 ft. Figure 15 indicates that positive drainage is generally maintained in the southern part of the top deck area, along the northern edge, and along the area above the subsurface berm. Areas with relatively flat slopes are formed near the general vicinity of the two collection sumps. With the placement of the proposed final cover (Figure 16), the relatively flat slopes on top of the geo-tubes in these areas can be addressed, and a minimum of 0.5% positive slopes can be provided. The spreadsheet output for settlement analysis for 10 representative calculation points (i.e., 1001 through 1010) is presented in Attachment 3.

CASE 3

The settlement isopach and post-settlement elevation maps for the top of LPSL (or bottom of gravel layer) at 30 years after closure (i.e., end of year 35) are shown in Figures 17 and 18, respectively. It should be noted the settlement calculated for this case consists of: (i) the primary settlement of the SOLW due to the placement of the proposed final cover; and (ii) the continued secondary settlement of the SOLW between the beginning of year 5 and the end of year 35 due to the placement of the liner system, SCA perimeter dike, and the geo-tubes that occurred during years 1 through 4. Per Figure 17, within the top deck area, the majority of the settlements are approximately 1 ft to 2 ft with the area above the subsurface berm having settlements ranging from 0.5 ft to 1 ft. Figure 18 indicates that the gravel layer still functions as required at year 35 because there is no slope reversal or local ponding and liquid can freely drain toward the two collection sump areas. The spreadsheet output for settlement analysis for 10 representative calculation points (i.e., 1001 through 1010) is presented in Attachment 4.

CASE 4

The settlement isopach and post-settlement elevation maps for the top of final cover at the end of year 35 are shown in Figures 19 and 20, respectively. It should be noted that the starting point for this case is the deformed surfaces at the end of year 4. The settlement calculated for this case consists of: (i) the primary settlement of the dredge material in geo-tubes due to the placement of the proposed final cover; and (ii) the continued secondary

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: Honeywell Project: Onondaga Lake SCA Final Design Project/ Proposal No.: GJ4299 Task No.: 04

settlement of the dredge material in geo-tubes due to the placement of the geo-tubes themselves. Per Figure 19, within the top deck area, the majority of the settlements between the end of year 4 and the end of year 35 are approximately 2 ft to 4 ft. Figure 20 indicates that positive drainage is generally maintained throughout the top deck area allowing surface water to flow toward the low points along the edges. Any long term development of local low points can be addressed during maintenance. The spreadsheet output for settlement analysis for 10 representative calculation points (i.e., 1001 through 1010) is presented in Attachment 5.

Cross-section Settlement Model (CSM)

CASE 5

The stress distribution of geo-tube, liner, and SCA perimeter dike loading within the foundation SOLW along Cross Section A is shown in Figure 21. Figure 21 indicates that the load induced stress does not dissipate much in the center portion of the SCA cell because the loading condition remains relatively uniform for a long distance. The stress values do change significantly in the sideslope area and dike area due to changing load conditions within a short distance. The pre- vs. post- foundation settlement profiles at the end of year 4 along Cross Section A are shown in Figure 22 as an overall view and in Figures 23 and 24 as zoom-in view for the left and right berms and sumps, respectively. Three series of calculation results (pre-settlement slope, post-settlement slope, and post-settlement strain) are shown between two adjacent calculation points for the top of LPSL. According to Figure 22, at the end of year 4, the majority of the settlement for the top of LPSL ranged from 8 ft to 10 ft in the top deck area except above the subsurface berm area where the settlement was about 6 ft. This is consistent with the post-settlement analysis results using SSM (see CASE 1). There is generally no post-settlement liner tensile strain (negative value) underneath the top deck area except in a few localized areas with maximum tensile strain on the order of 0.5%. According to Figures 23 and 24, at the end of year 4, the post-settlement liner tensile strain values range from 0.1% to 0.6% in areas directly underneath the sideslope area, and inside the top deck area. The settlements calculated at the toe of the dike are on the order of 1.1 ft and 0.7 ft for the left (west) and right (east) berms, respectively. Also according to Figures 23 and 24, at the end of year 4, the predicted post-settlement slopes along the top of LPSL will remain positive toward the left (west) and right (east) sumps without grade reversal or local ponding. No post-settlement liner tensile strains are observed in either the sump areas or the surrounding

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

areas.

The stress distribution of geo-tube, liner, and SCA perimeter dike loading within the foundation SOLW along Cross Section B is shown in Figure 25. The characteristics of the stress distribution are similar to that of Cross Section A. The pre- vs. post- foundation settlement profiles at the end of year 4 along Cross Section B are shown in Figure 26 as an overall view and in Figures 27 and 28 as zoom-in view for the left and right berms, respectively. Three series of calculation results (pre-settlement slope, post-settlement slope, and post-settlement strain) are shown between two adjacent calculation points for the top of LPSL. According to Figure 26, at the end of year 4, the majority of the settlement for the top of LPSL ranged from 8 ft to 11 ft in the top deck area. This is consistent with the post-settlement analysis results using SSM (see CASE 1). There is no post-settlement liner tensile strain (negative value) in the top deck areas. According to Figures 27 and 28, at the end of year 4, the post-settlement liner tensile strain values range from 0.1% to 0.4% in the sideslope areas. The settlements calculated at the toe of the dike are on the order of 0.9 ft and 0.1 ft for the left (north) and right (south) berms, respectively. According to Figure 26, at the end of year 4, the post-settlement slopes along the top of LPSL (i.e., flow line) remain positive toward the left (west) sumps without grade reversal or local ponding. No post-settlement liner tensile strains are observed in the left sump area and the surrounding area.

The spreadsheet output for the settlement analysis for 10 representative calculation points (i.e., 26 through 35, Cross Section A) is presented in Attachment 6.

CASE 6

The pre- vs. post-settlement profiles at the end of year 4 along Cross Section A are shown in Figure 29 for various layers of geo-tubes. According to Figure 29, at the end of year 4, the majority of the settlement for the top of the geo-tubes ranged from 11 ft to 12 ft in the top deck area except the area above the subsurface berm where the settlement was about 8 ft. This is consistent with the results using SSM (see CASE 2).

The pre- vs. post-settlement profiles at the end of year 4 along Cross Section B are shown in Figure 30 for various layers of geo-tubes. According to Figure 30, at the end of year 4, the majority of the settlements for the top of geo-tube phase 4 ranged from 9 ft to 14 ft in the top deck area. This is consistent with the results using SSM (see CASE 2).

The spreadsheet output for settlement analysis for 10 representative calculation points

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: Honeywell Project: Onondaga Lake SCA Final Design Project/ Proposal No.: GJ4299 Task No.: 04

(i.e., 26 through 35, Cross Section A) is presented in Attachment 7.

CASE 7

The stress distribution of the proposed final cover loading within the dredge material in geo-tubes and foundation SOLW along Cross Section A is shown in Figure 31. Similar to the stress distribution due to geo-tube loading, the stress distribution due to final cover also remains relatively uniform in the center portion and highly variable in the cover sideslope and dike areas. The pre- (i.e., at the end of year 4) vs. post- (i.e., at the end of year 35) foundation settlement profiles along Cross Section A are shown in Figure 32 as an overall view and in Figures 33 and 34 as zoom-in views for the left and right berms and sumps, respectively.

Three series of calculation results (pre-settlement slope [i.e., slope at the end of year 4], post-settlement slope, and post-settlement strain) are shown between two adjacent calculation points for the top of LPSL. It should be noted that the starting point for this case is the deformed profiles at the end of year 4. The settlement calculated for this case consists of: (i) the primary settlement of the SOLW due to the placement of the proposed final cover, and (ii) the continued secondary settlement of the SOLW between the beginning of year 5 and the end of year 35 due to the placement of the liner system, SCA perimeter dike, and the geo-tubes that occurred during years 1 through 4. According to Figure 32, at the end of year 35 as compared to the end of year 4, the majority of the settlements for the top of LPSL ranged from 1 ft to 1.5 ft in the top deck area except in the area above the subsurface berm where the settlement was about 0.5 ft. This is consistent with the results using SSM (see CASE 3).

There is generally no post-settlement liner tensile strain (negative value) in the top deck areas except some localized areas with maximum tensile strain on the order of 0.6%. It should be noted that the maximum 0.6% tensile strain is the adjusted strain. It is the sum of the liner tensile strain of 0.5% at approximate distance 1,000 ft at the end of year 4 (Figure 22) and the additional liner tensile strain of 0.1% at the same location at the end of year 35 (Figure 32). According to Figures 23, 24, 33, and 34, at the end of year 35, the post-settlement liner tensile strain values (adjusted) range from 0.1% to 2.2% in areas directly underneath the cover sideslope area. The maximum adjusted 2.2% tensile strain is the sum of the liner tensile strain of 0.1% at approximate distance 1,790 ft at the end of year 4 (Figure 24) and the additional liner tensile strain of 2.1% at the same location at the

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: Honeywell Project: Onondaga Lake SCA Final Design Project/ Proposal No.: GJ4299 Task No.: 04

end of year 35 (Figure 34). The maximum 2.2% liner tensile strains occurred along the inner side of the dike. Also according to Figures 33 and 34, at the end of year 35, the predicted post-settlement slopes along the top of LPSL will remain positive toward the left (west) and right (east) sumps without grade reversal or local ponding. No post-settlement liner tensile strains are observed in either the sump areas or the surrounding areas.

The stress distribution of the proposed final cover loading within the dredge material in geo-tubes and foundation SOLW along Cross Section B is shown in Figure 35. The characteristics of the stress distribution are similar to that of Cross Section A. The pre- (i.e., at the end of year 4) vs. post- (i.e., at the end of year 35) foundation settlement profiles along Cross Section B are shown in Figure 36 as an overall view and in Figures 37 and 38 as zoom-in view for the left and right berms, respectively. Three series of calculation results (pre-settlement slope, post-settlement slope, and post-settlement strain) are shown between two adjacent calculation points for the top of LPSL. According to Figure 36, at the end of year 35 as compared to the end of year 4, the majority of the settlements for the top of LPSL ranged from 1 ft to 1.5 ft in the top deck area. This is consistent with the results using SSM (see CASE 3). There is no calculated post-settlement liner tensile strain in the top deck areas. According to Figures 27, 28, 37 and 38, at the end of year 35, the post-settlement liner tensile strain values (adjusted) range from 0.1% to 1.0% in areas directly underneath the cover sideslope area. The maximum adjusted 1.0% tensile strain is the sum of the liner compressive strain of 0.9% at approximate distance 210 ft at the end of year 4 (Figure 27) and the additional liner tensile strain of 1.9% at the same location at the end of year 35 (Figure 37). The maximum liner tensile strains occurred along the inner side of the dike. According to Figure 36, at the end of year 35, the post-settlement slopes along the top of LPSL (i.e., flow line) remain positive toward the left (west) sumps without grade reversal or local ponding. No post-settlement liner tensile strains are observed in the left sump area and the surrounding area.

The spreadsheet output for settlement analysis for 10 representative calculation points (i.e., 26 through 35, Cross Section A) is presented in Attachment 8.

SSM and CSM Comparison

As mentioned before, the main difference between the SSM and CSM is that CSM considers the load-induced stress distribution within the foundation SOLW and the dredge material in geo-tubes while the SSM does not. To better illustrate the difference, the post-

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: Honeywell Project: Onondaga Lake SCA Final Design Project/ Proposal No.: GJ4299 Task No.: 04

settlement top of LPSL calculated without considering stress distribution is shown on Figure 39 along with the analysis results considering the stress distribution for Cross Section A at the end of year 4.

It is noted that under the top deck area (i.e., between distance 300 ft and 600 ft), the post-settlement Top of LPSL with or without stress distribution are almost identical indicating that the load-induced stress dissipate very little in this area. However, these two lines vary in the sideslope area and the perimeter berm area. In the sideslope area (i.e., between distance 160 ft and 260 ft), the post-settlement Top of LPSL line without stress distribution has many near vertical drops at the same location where the loading condition changes significantly, while the Top of LPSL line with stress distribution transitions smoothly regardless of a change in loading condition. At the toe of the gravel layer (i.e., distance 160 ft), the Top of LPSL line without stress distribution predicts less settlement (approximately 1.3 ft) as compared to the Top of LPSL line with stress distribution. This is because the stress condition underneath this location is also affected by the stress distribution from adjacent geo-tube loading. Similarly, at the toe of the perimeter berm (i.e., distance 75 ft), the Top of LPSL line without stress distribution predicts no settlement while the Top of LPSL line with stress distribution predicts 1 ft of settlement.

SSM and CSM results are very similar in the top deck area of the SCA but do differ somewhat in the sideslope and perimeter berm areas, which have more complicated loadings, more potential for liner strain, and represent a relatively small portion of the SCA. Therefore, it is considered appropriate to use SSM to estimate the overall surface settlement for the SCA and to use CSM in the sideslope and perimeter berm areas to estimate liner strain. This is consistent with the approach presented herein.

CONCLUSIONS

The analyses provided herein indicate that

- (i) The anticipated foundation settlement during the operations period is 9 ft to 11 ft, and the anticipated settlement of dredge material in the geo-tubes during the operations period is 2.0 ft on average with a maximum of 4.0 ft.
- (ii) Relatively small foundation and cover settlements are anticipated during the post-closure period. The additional foundation settlement during the post-closure period is estimated to be 1 ft to 2 ft. The additional cover settlement

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: Honeywell Project: Onondaga Lake SCA Final Design Project/ Proposal No.: GJ4299 Task No.: 04

(i.e., settlement of dredge material in the geo-tubes) during the post-closure period is estimated to be 1.5 ft on average with a maximum of 3.0 ft.

- (iii) The liquid collection layer (i.e., the gravel layer) is anticipated to function properly by allowing liquid to freely flow to the sump areas during the closure and post-closure periods. The settlement calculations predict no slope reversal or local ponding.
- (iv) The maximum tensile strain on the liner system, which was calculated to be 2.2% during the closure and post-closure periods, is less than the allowable tensile strain of 5% for liner geomembrane. For the closure and post-closure periods, there was little or no liner tensile strain calculated for the majority of the liner system underneath the top deck area. According to the results, liner tensile strains were typically observed under the sideslope and in the dike areas. The maximum liner tensile strains typically occur on the inner side of dike sideslope areas.
- (v) The east and the west sumps are anticipated to function properly by maintaining positive drainage toward both sump areas during the closure and post-closure periods. The settlement calculations predict no slope reversal, local ponding, or tensile liner strain in both sump areas and the surrounding areas.
- (vi) The proposed final cover is expected to perform properly during the post-closure period by maintaining positive drainage slopes. Any long term development of local low points can be addressed during maintenance.

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

REFERENCES

Berg, R.R. and Bonaparte, R., “*Long-Term Allowable Tensile Stresses for Polyethylene Geomembranes*,” *Geotextiles and Geomembranes*, Vol. 12, 1993, pp. 287-306.

Holtz, R.D., and Kovacs, W.D. “*An Introduction to Geotechnical Engineering*,” Prentice-Hall Inc., Englewood Cliffs, N.J., 1981.

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

Tables

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

Table 1. Summary of Material Properties for Settlement Calculation

Material		Total Unit Weight (γ_t , pcf)	Overconsolidation Ratio (OCR)	Modified Compression Index (C_{ce})	Modified Recompression Index (C_{re})	Coefficient of Secondary Compression ($C_{\alpha\epsilon}$) ⁽¹⁾
SOLW	Zone 1	82	4.5 for D=0~10 ft 2.0 for D=10~20 ft 1.0 for D>20 ft	0.34	0.015	0.13% for $\sigma'_v/\sigma'_p \leq 1.0$ 0.83% for $\sigma'_v/\sigma'_p > 1.0$
	Zone 2			0.46	0.014	0.11% for $\sigma'_v/\sigma'_p \leq 1.0$ 0.91% for $\sigma'_v/\sigma'_p > 1.0$
	Zone 3			0.38	0.021	0.07% for $\sigma'_v/\sigma'_p \leq 1.0$ 0.70% for $\sigma'_v/\sigma'_p > 1.0$
Dike Soil, Soil Liner and Final Cover		120	N/A	N/A	N/A	N/A
Dredge Material		86	1.0	0.291	0.0045	0.08% for $\sigma'_v/\sigma'_p \leq 1.0$ 0.60% for $\sigma'_v/\sigma'_p > 1.0$
Gravel		120	N/A	N/A	N/A	N/A

(1) $\sigma'_v = \sigma'_{v0} + \Delta\sigma'_v$ is the final effective vertical stress in SOLW; σ'_p is the pre-consolidation pressure.

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

Figures

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: Honeywell Project: Onondaga Lake SCA Final Design Project/ Proposal No.: GJ4299 Task No.: 04

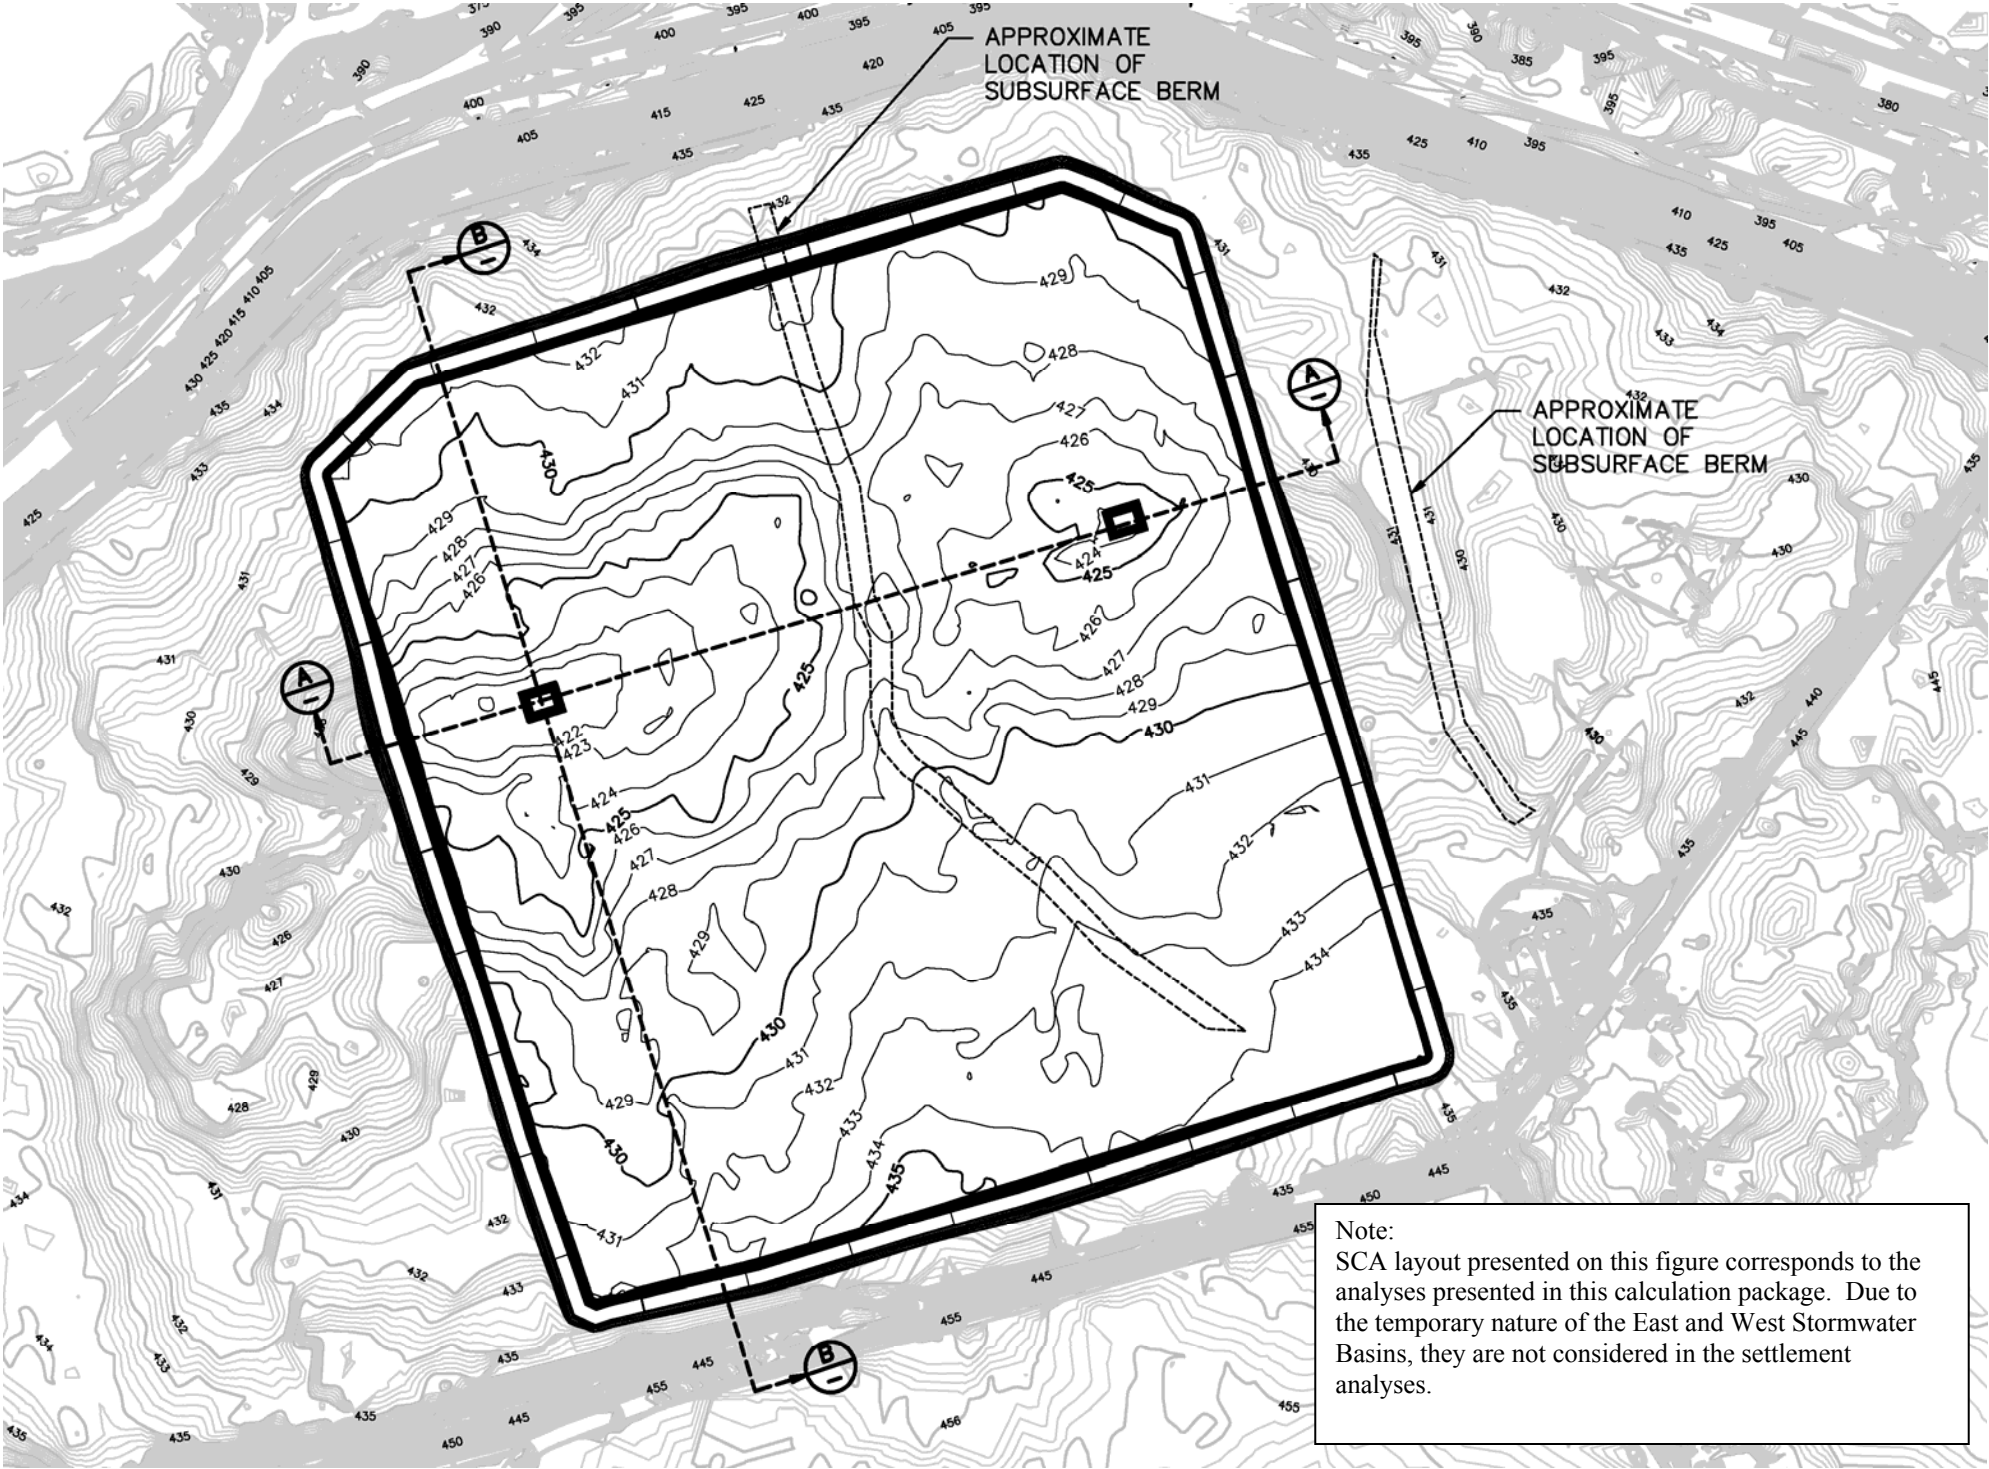


Figure 1. Location of SCA Cell

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

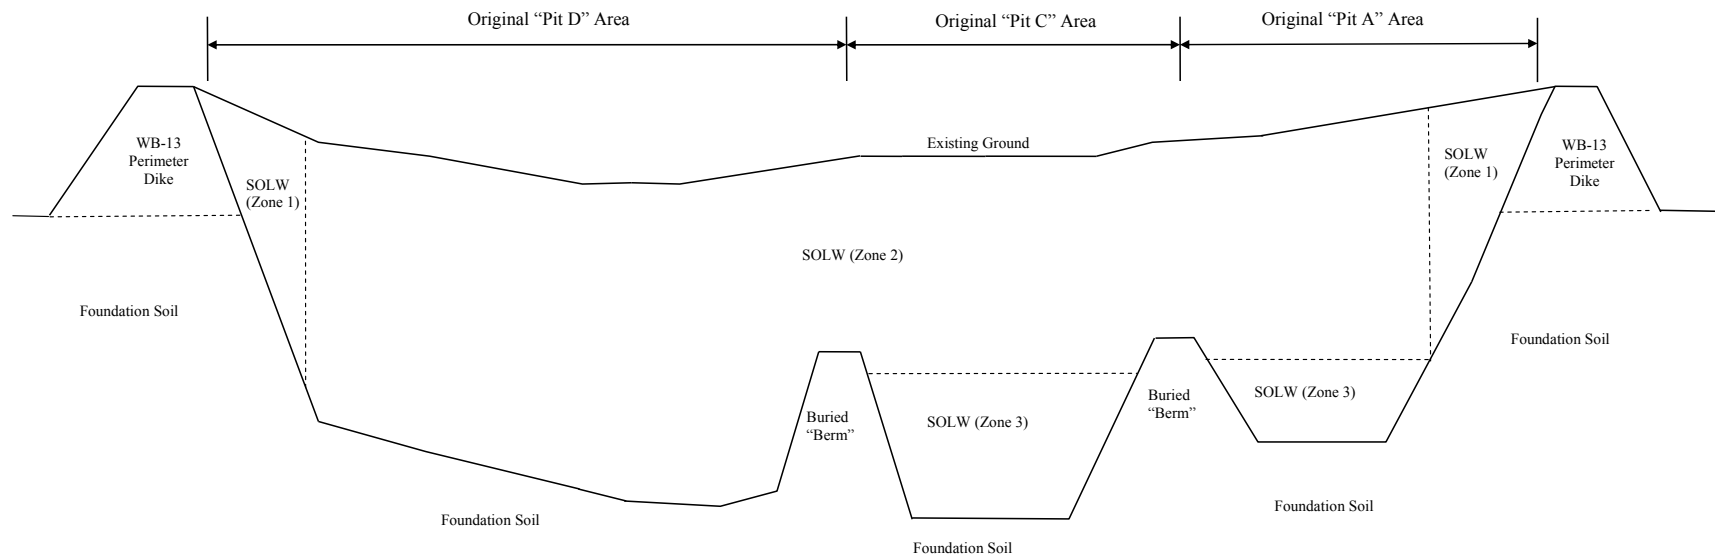


Figure 2. Schematic of Subsurface Profile

[not to scale; for the purpose of showing subsurface stratigraphy only; location of the section is shown below]



Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: Honeywell Project: Onondaga Lake SCA Final Design Project/ Proposal No.: GJ4299 Task No.: 04

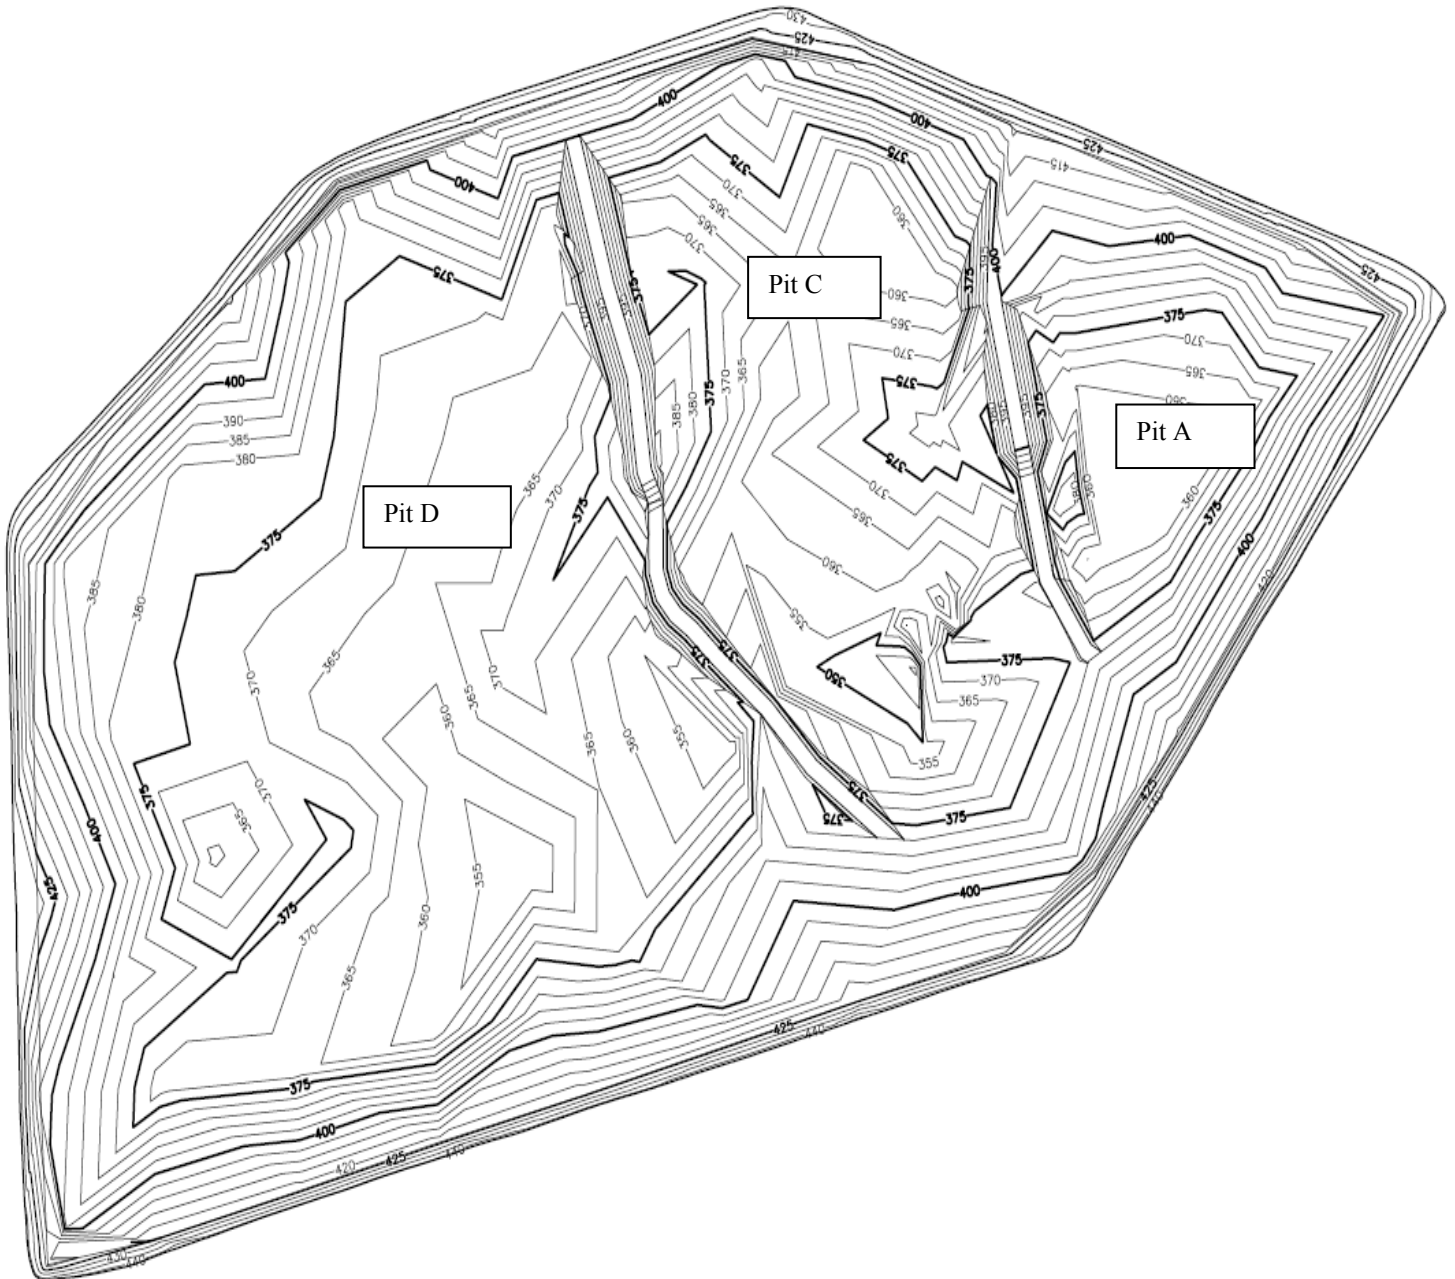


Figure 3. SCA Bottom of Foundation SOLW Grading Plan

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: Honeywell Project: Onondaga Lake SCA Final Design Project/ Proposal No.: GJ4299 Task No.: 04

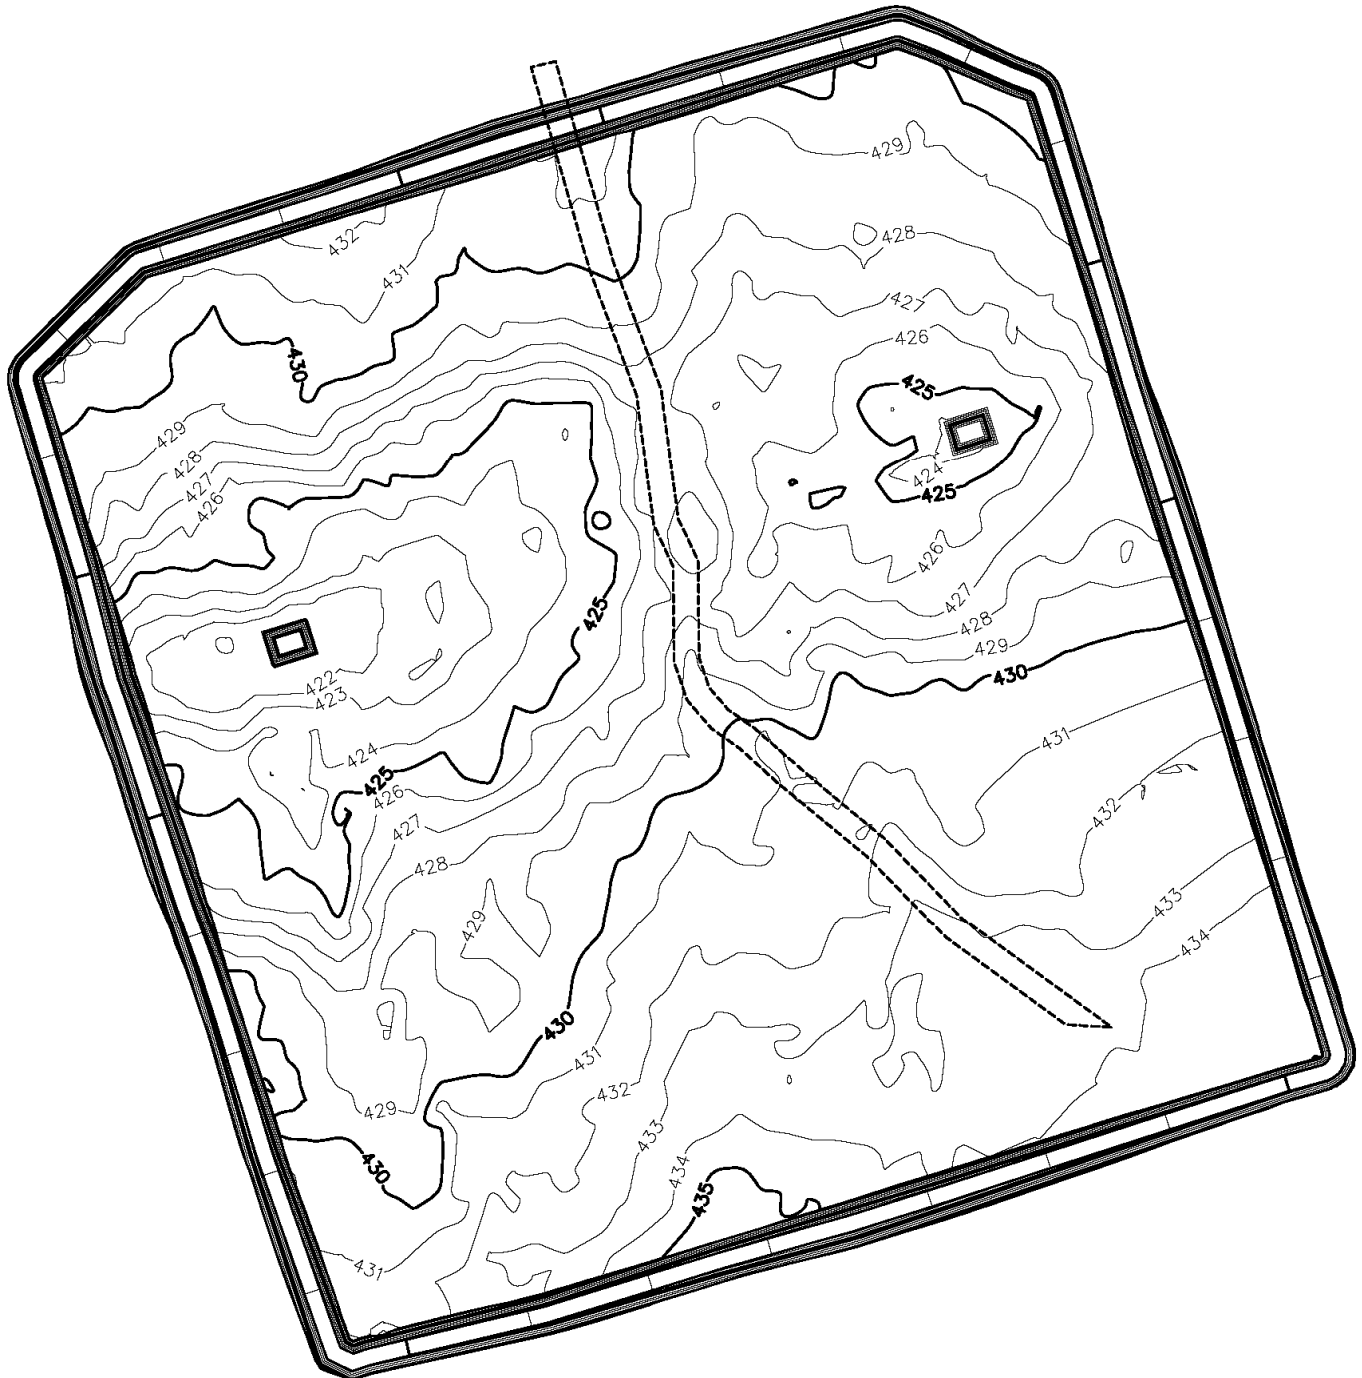


Figure 4. SCA Pre-Settlement Bottom of LPSL Grading Plan (i.e., existing grade)

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: Honeywell Project: Onondaga Lake SCA Final Design Project/ Proposal No.: GJ4299 Task No.: 04

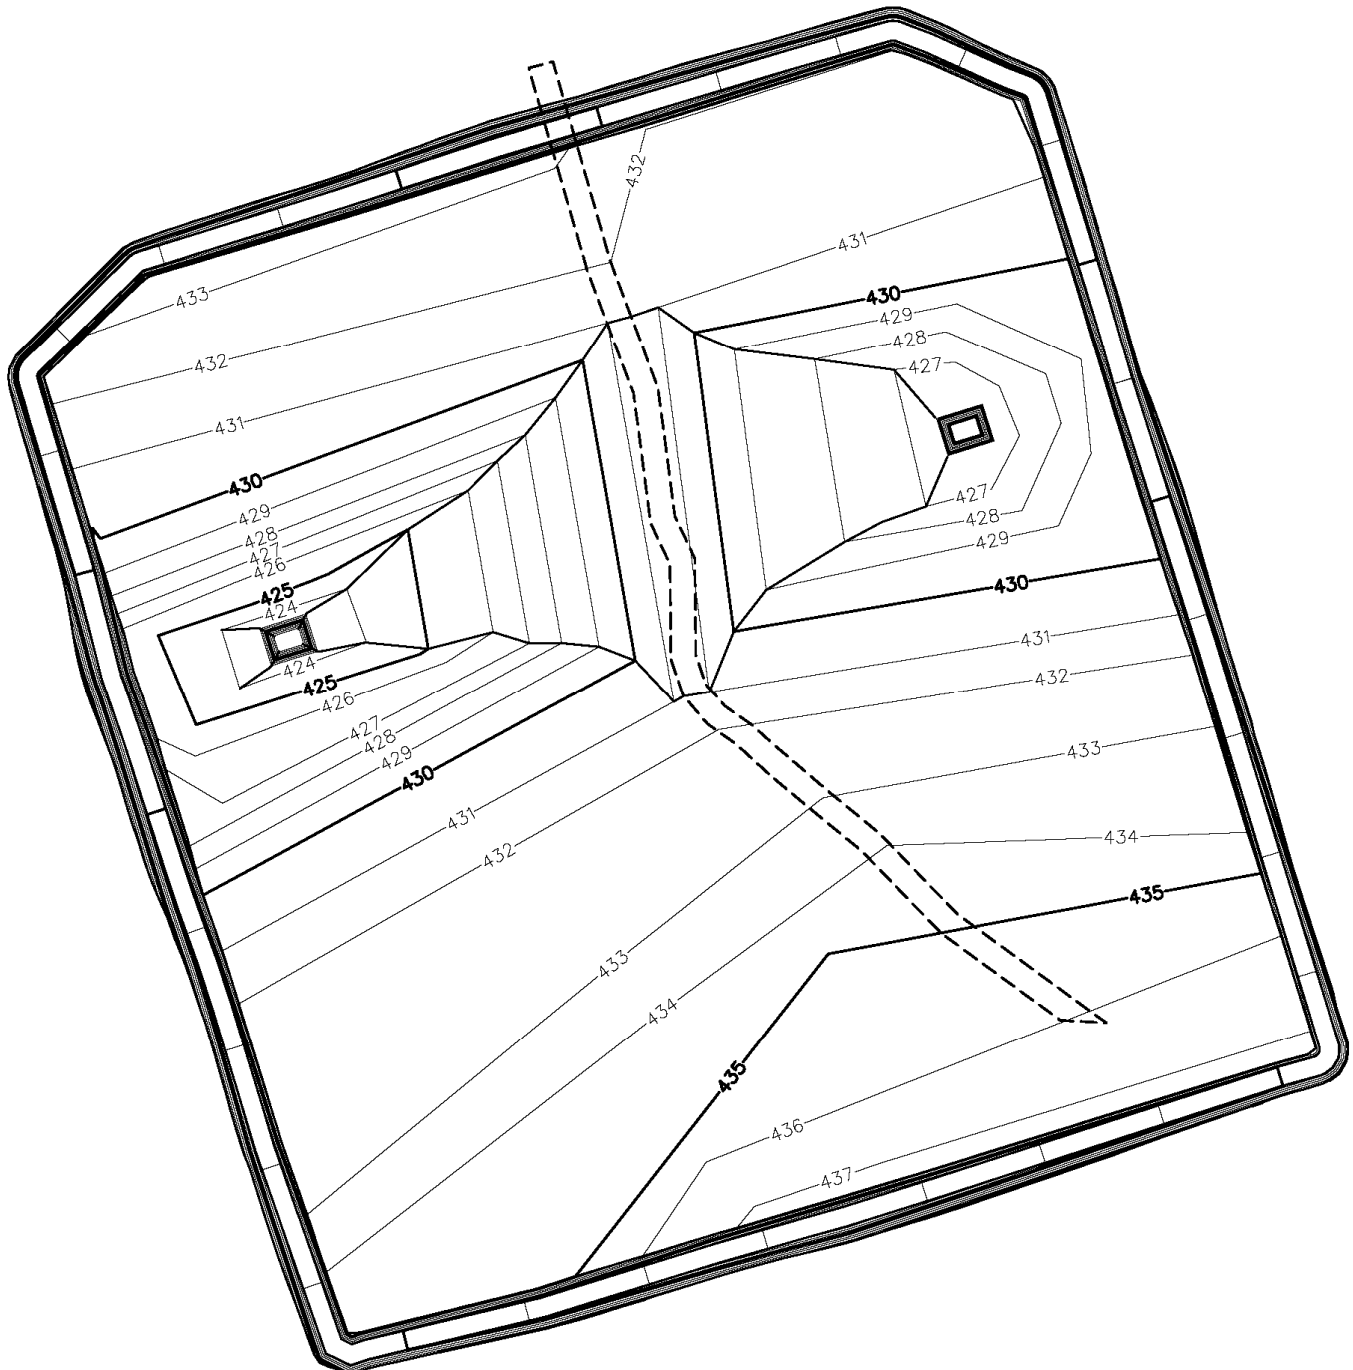


Figure 5. SCA Pre-Settlement Top of LPSL Grading Plan

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: Honeywell Project: Onondaga Lake SCA Final Design Project/ Proposal No.: GJ4299 Task No.: 04

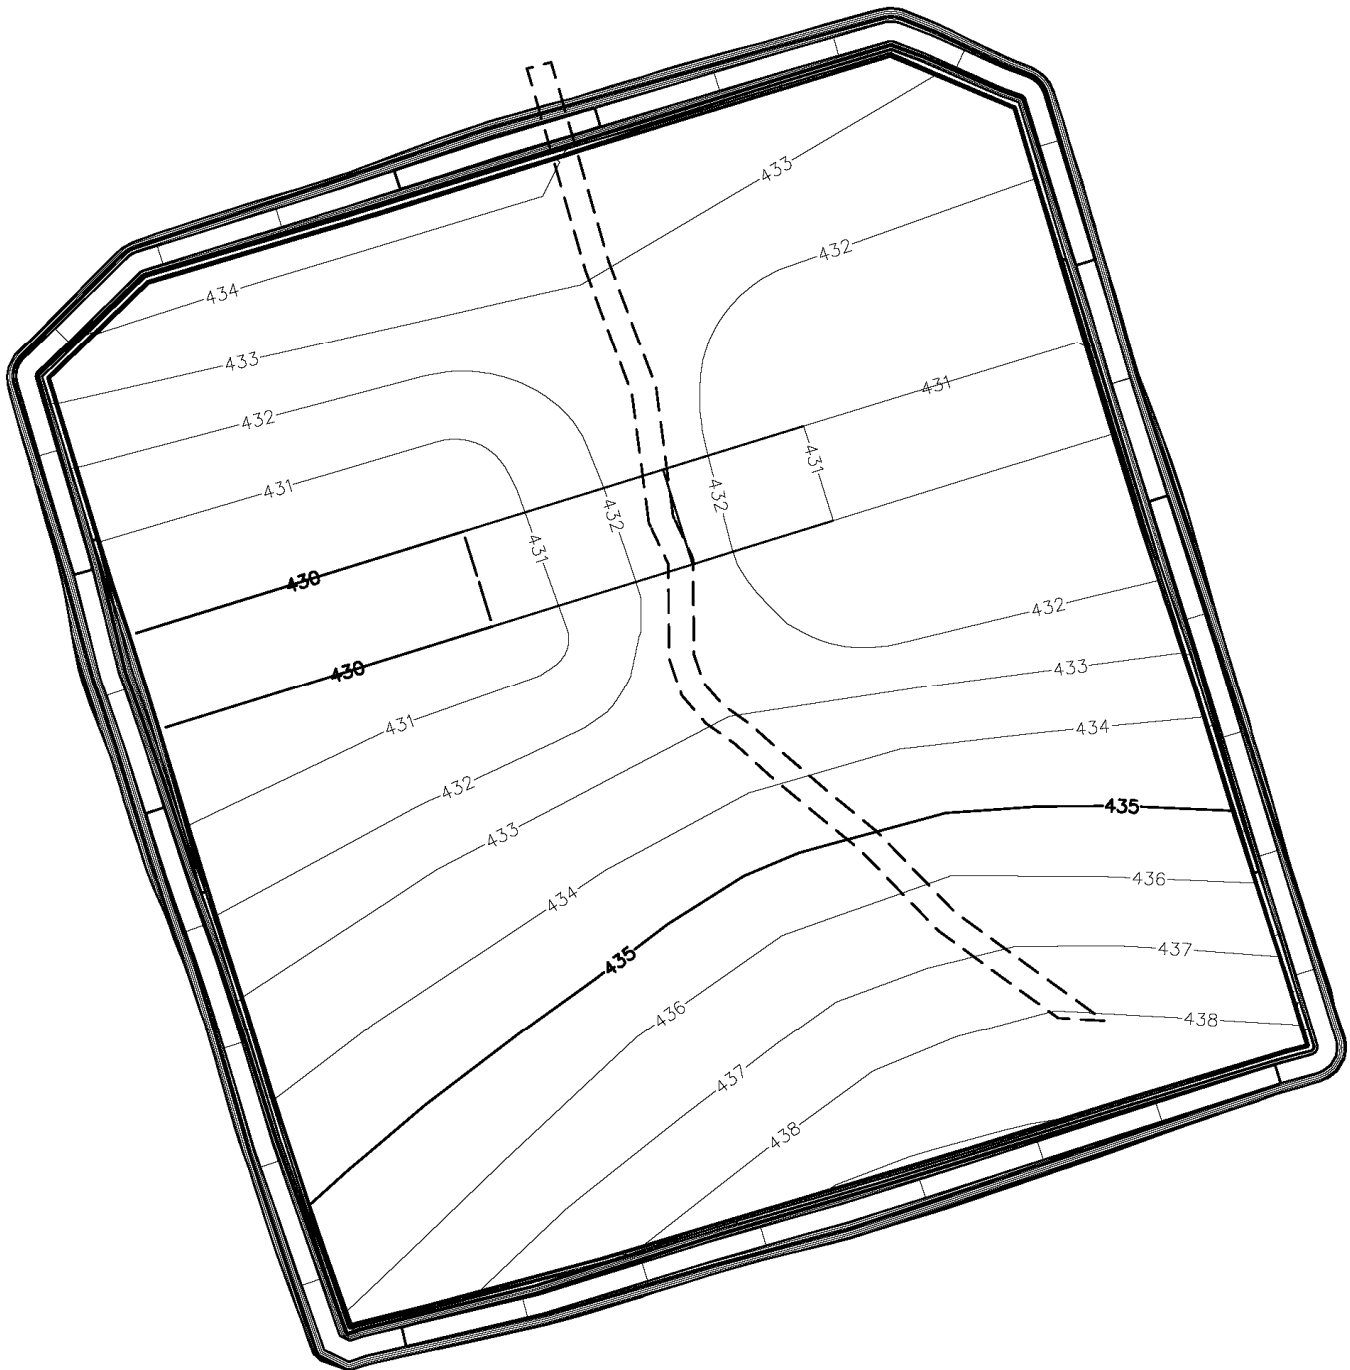


Figure 6. SCA Pre-Settlement Top of Gravel Grading Plan

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: Honeywell Project: Onondaga Lake SCA Final Design Project/ Proposal No.: GJ4299 Task No.: 04

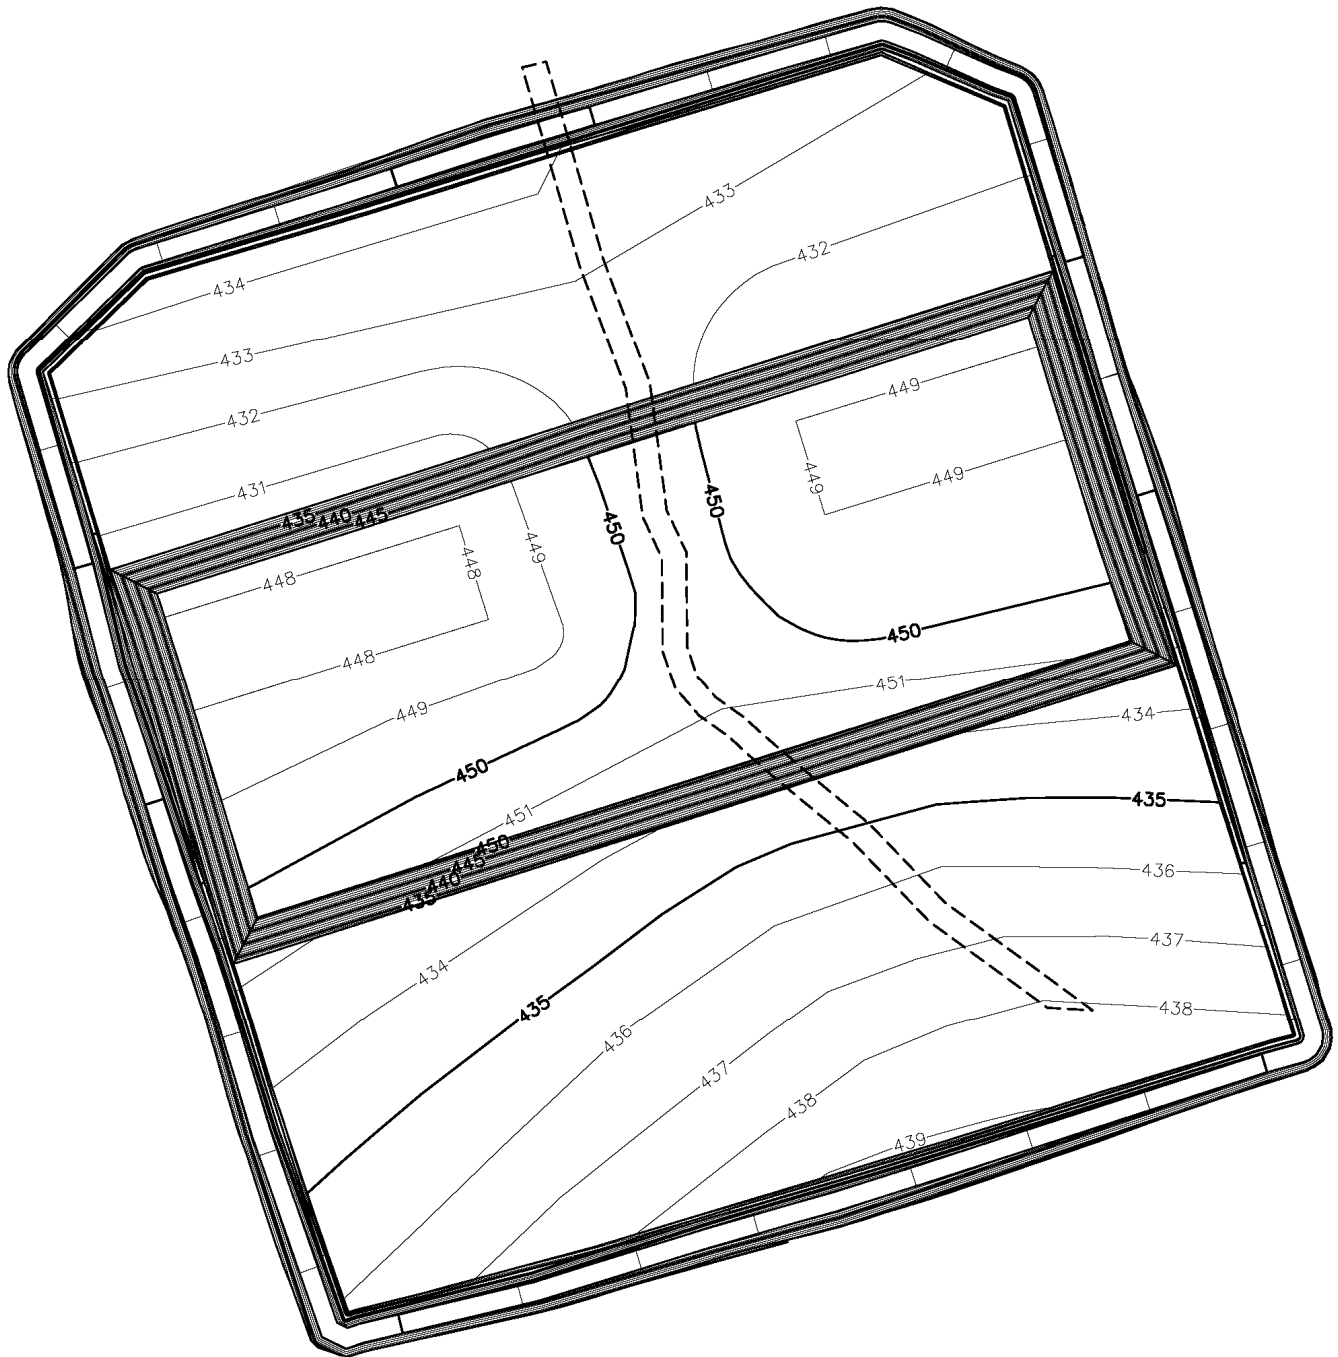


Figure 7. SCA Pre-Settlement Potential Top of Geo-tube Year 1 Grading Plan

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: Honeywell Project: Onondaga Lake SCA Final Design Project/ Proposal No.: GJ4299 Task No.: 04

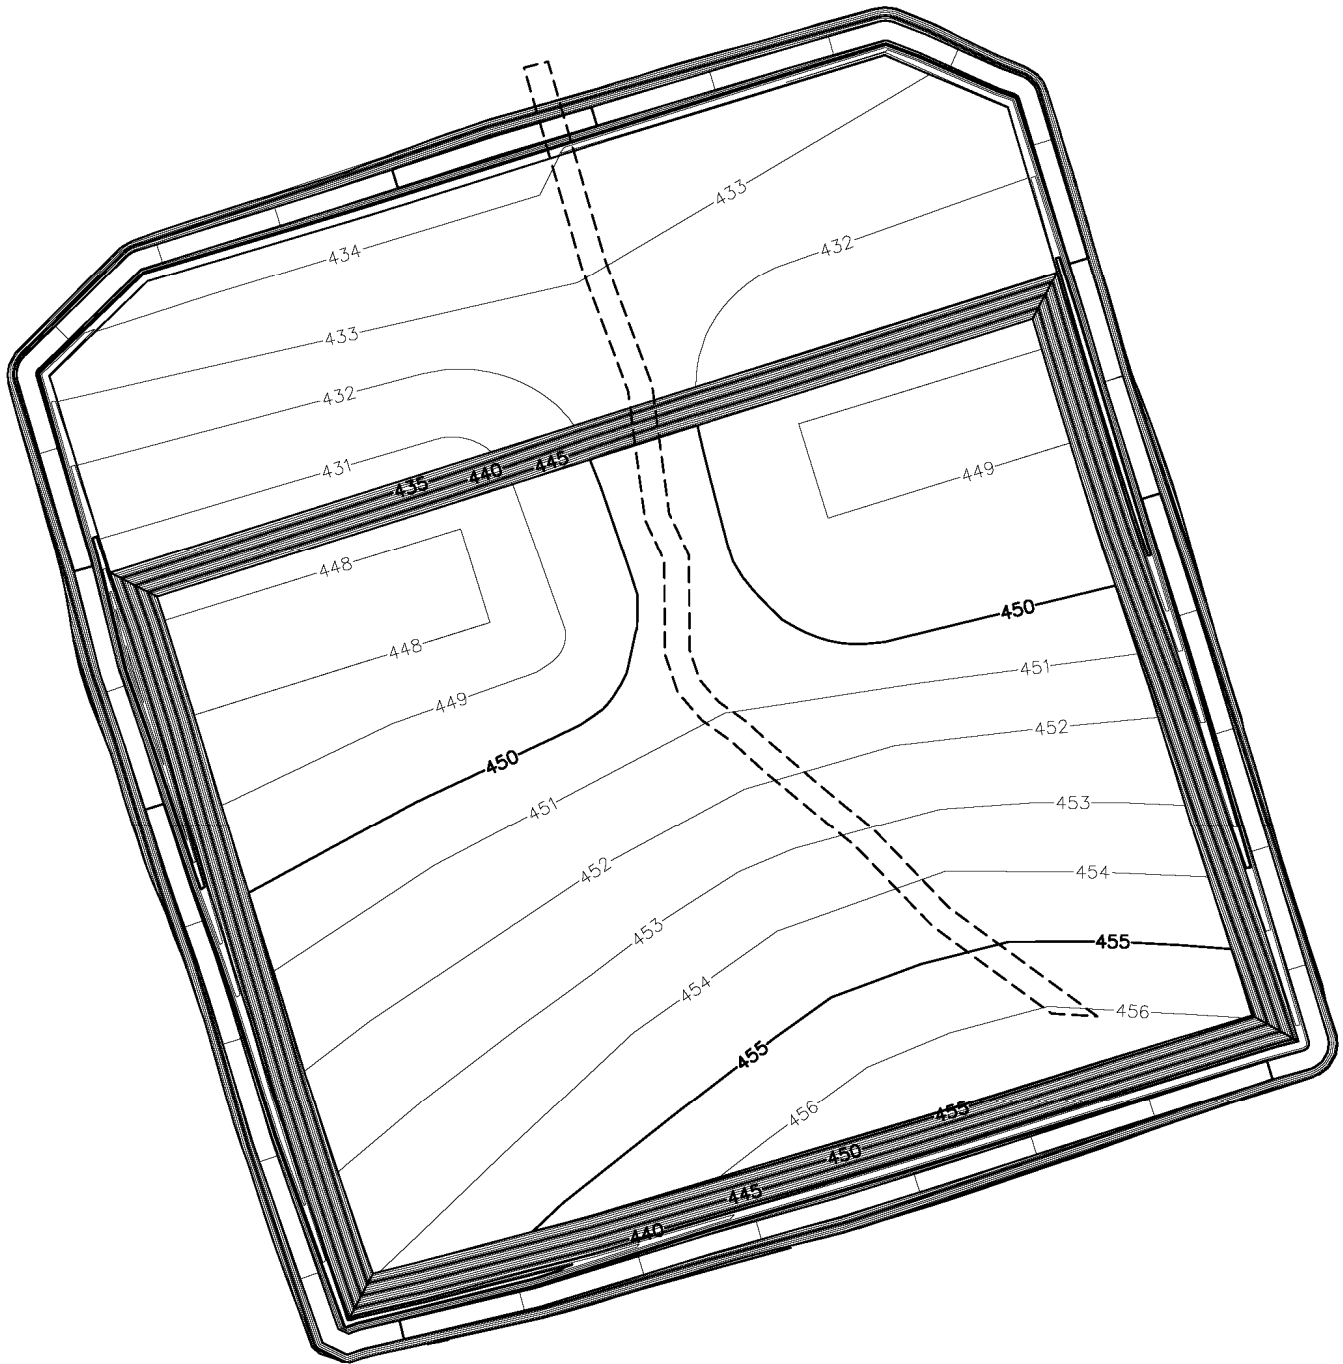


Figure 8. SCA Pre-Settlement Potential Top of Geo-tube Year 2 Grading Plan

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: Honeywell Project: Onondaga Lake SCA Final Design Project/ Proposal No.: GJ4299 Task No.: 04

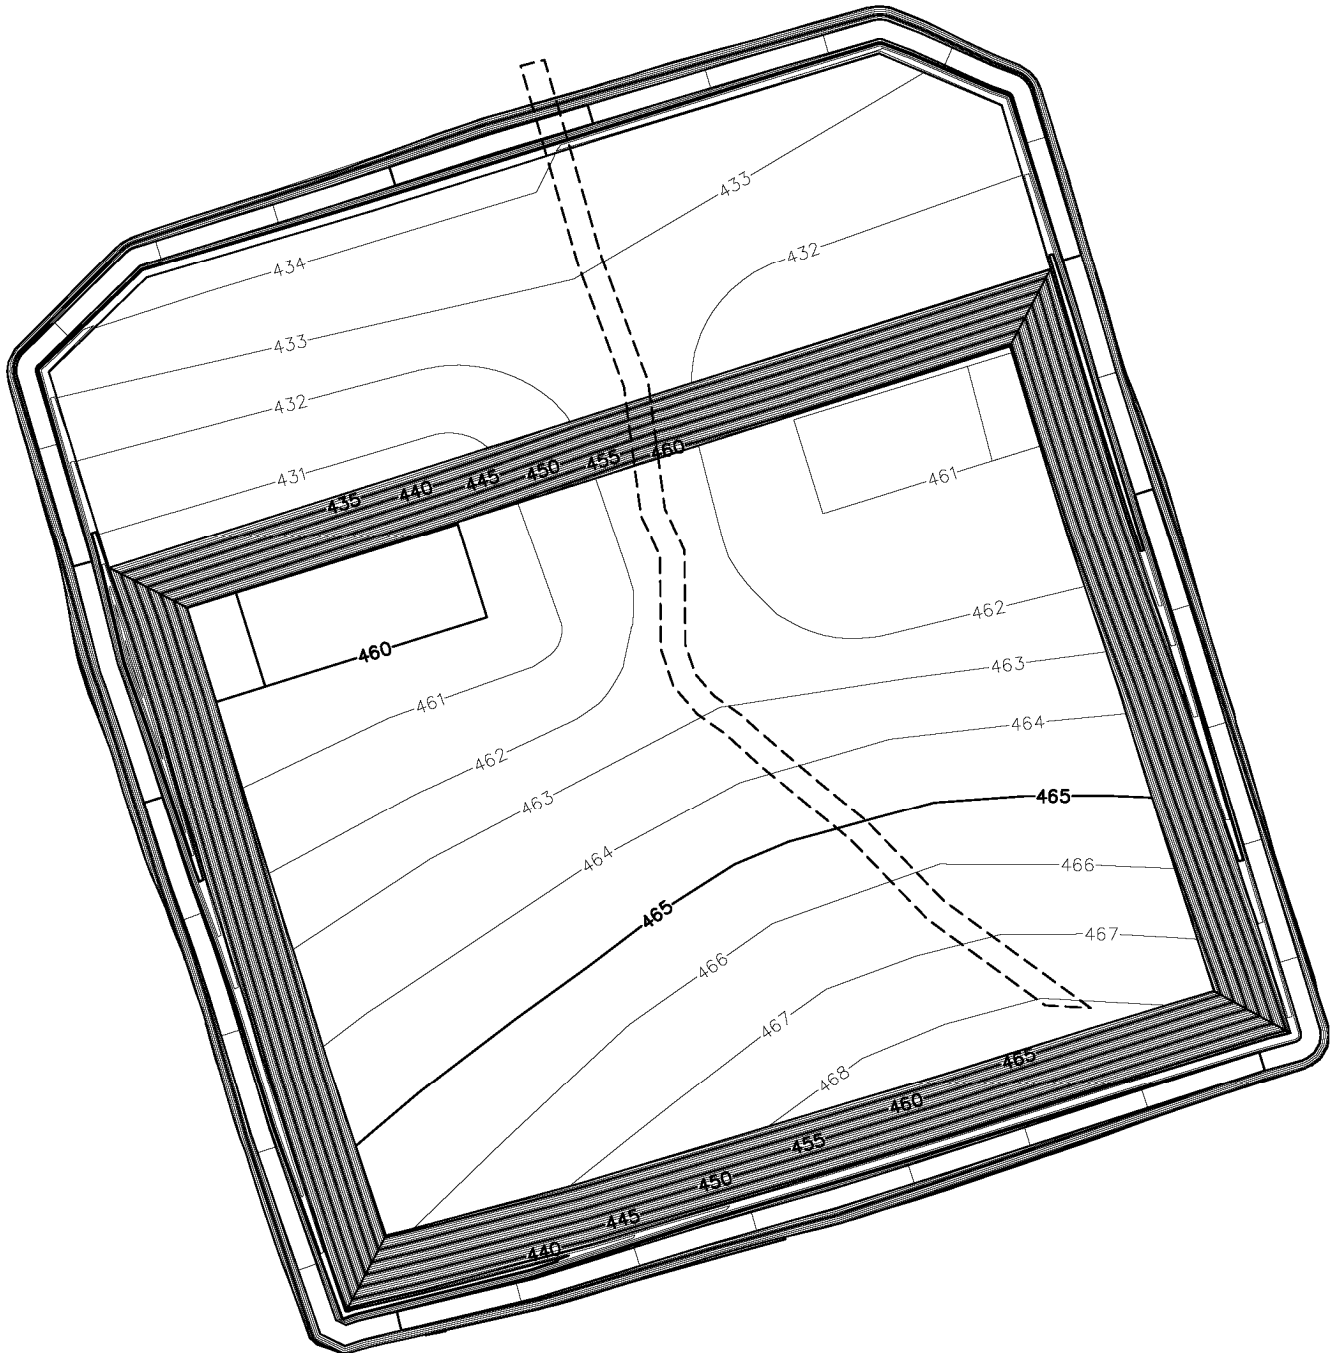


Figure 9. SCA Pre-Settlement Potential Top of Geo-tube Year 3 Grading Plan

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: Honeywell Project: Onondaga Lake SCA Final Design Project/ Proposal No.: GJ4299 Task No.: 04


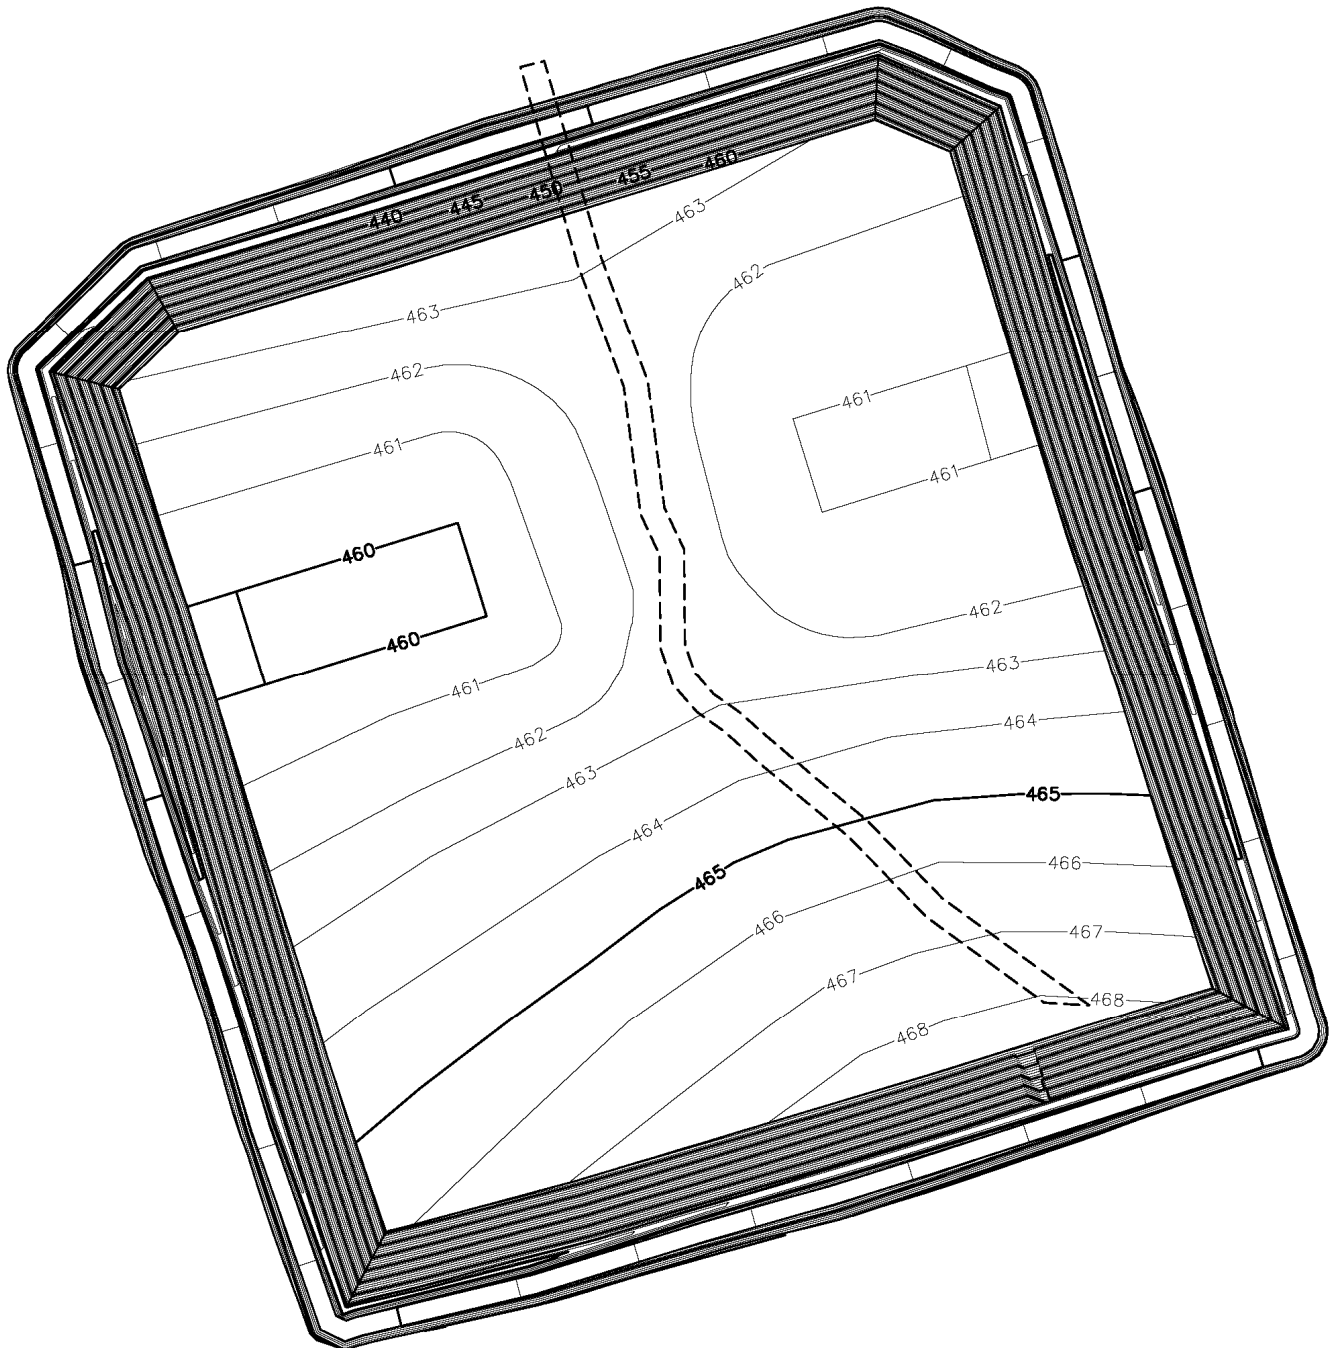


Figure 10. SCA Pre-Settlement Potential Top of Geo-tube Year 4 Grading Plan

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

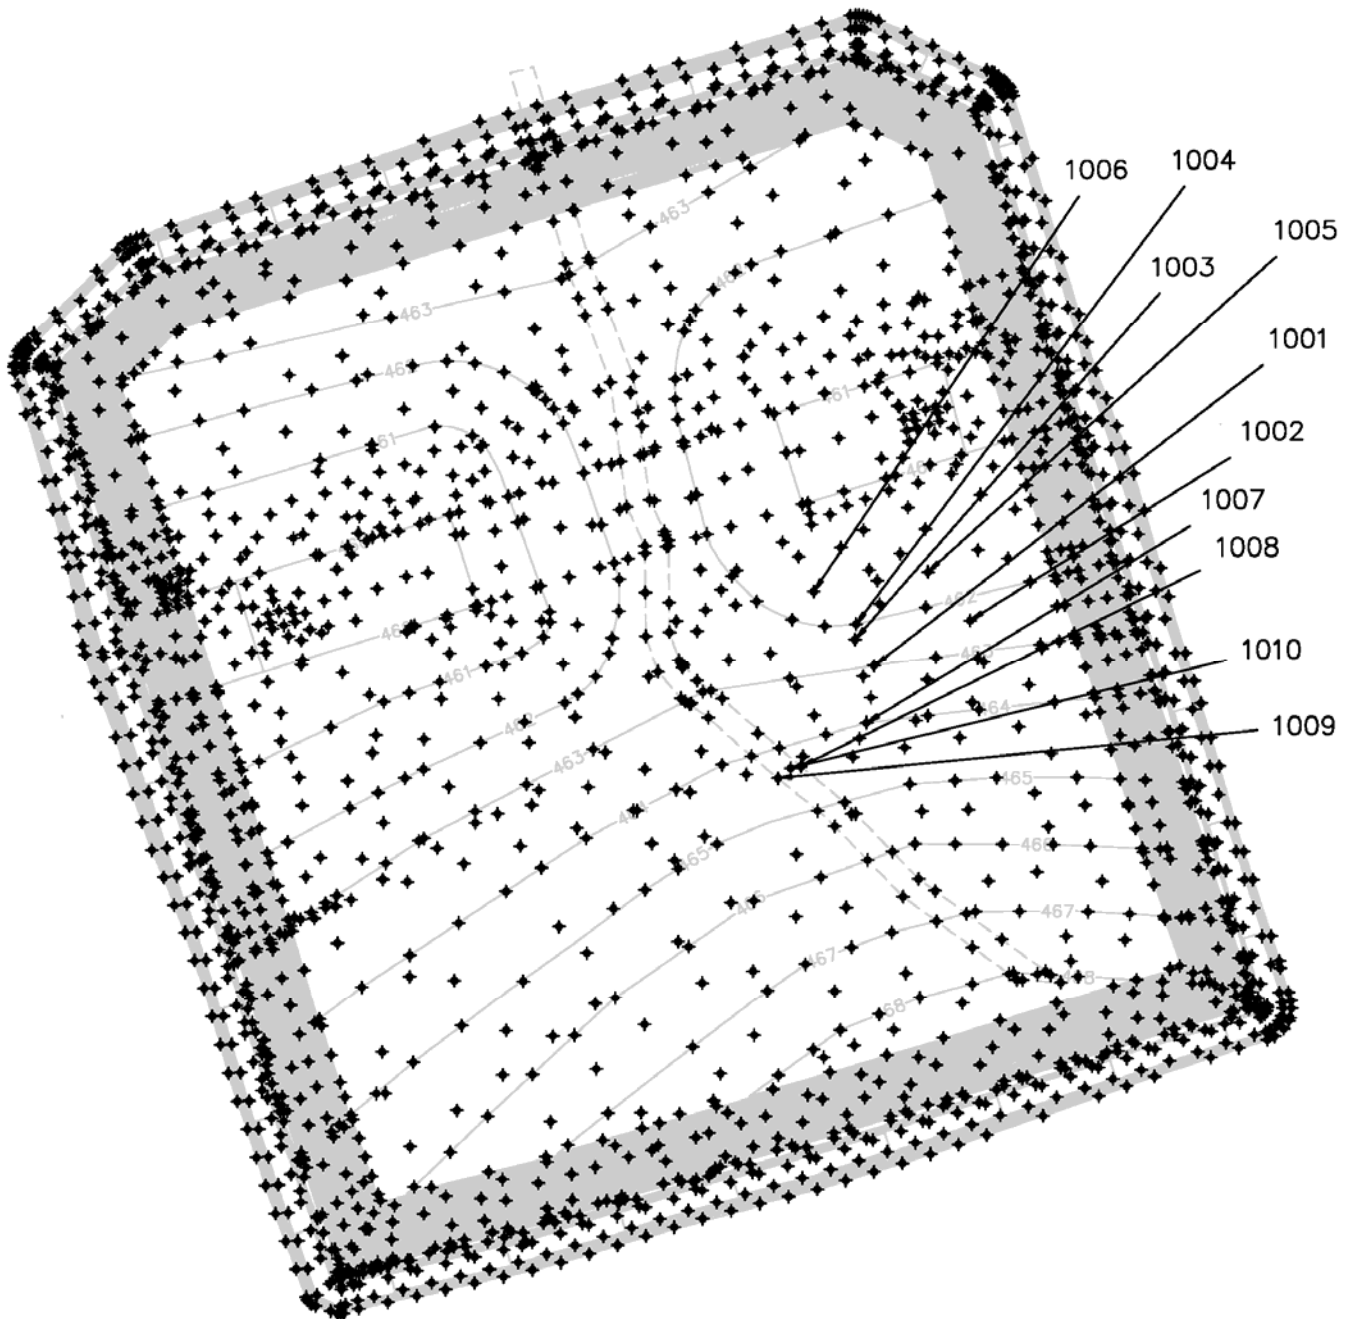

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: Honeywell Project: Onondaga Lake SCA Final Design Project/ Proposal No.: GJ4299 Task No.: 04

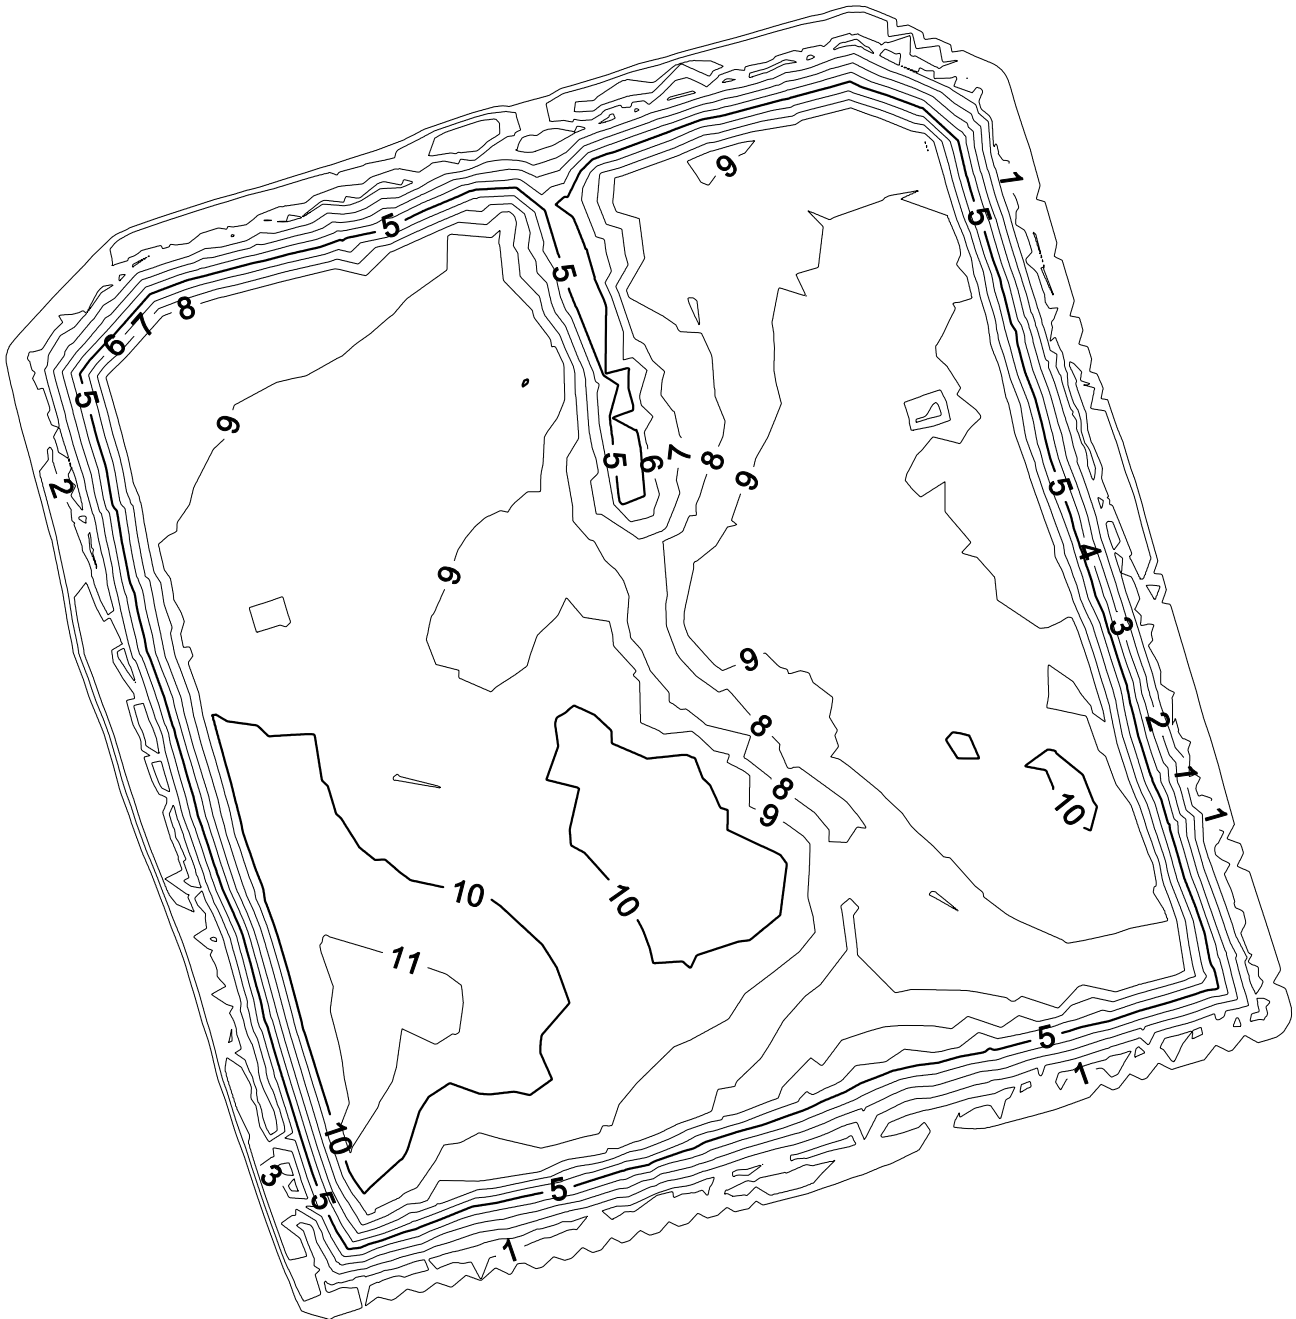


Figure 12. CASE 1: Top of LPSL Settlement from beginning of Year 1 to End of Year 4

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: Honeywell Project: Onondaga Lake SCA Final Design Project/ Proposal No.: GJ4299 Task No.: 04

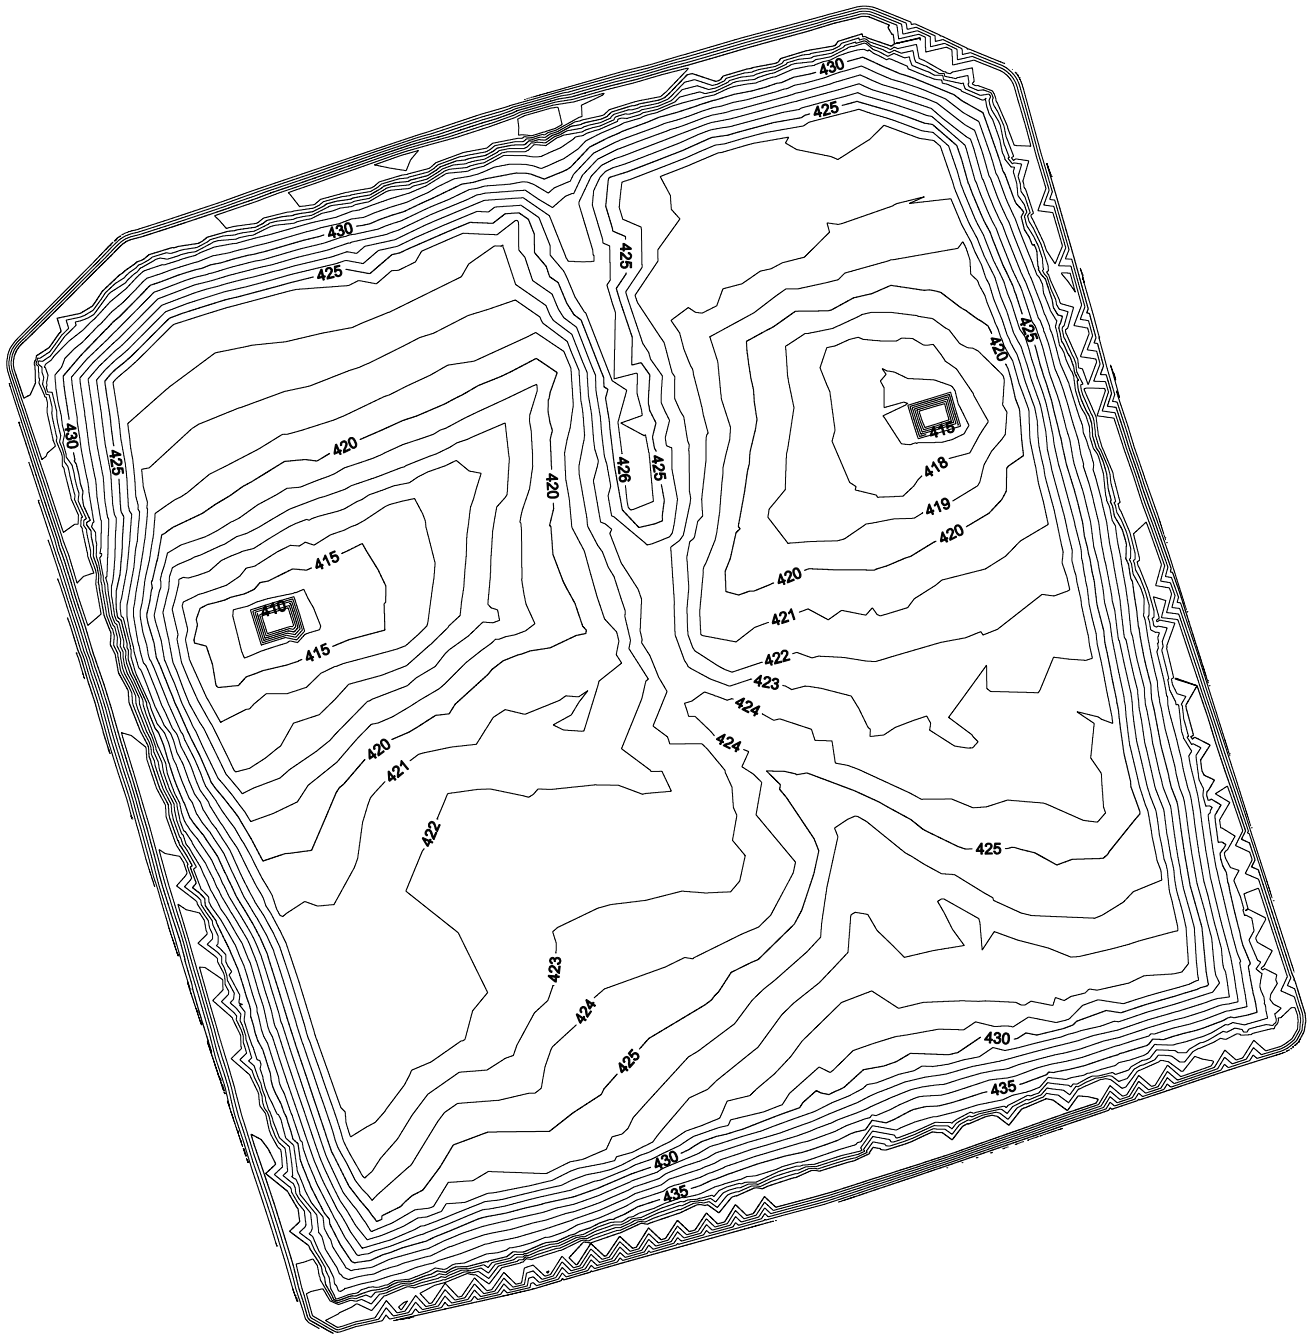


Figure 13. CASE 1: Top of LPSL Post-Settlement Elevation at the End of Year 4

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: Honeywell Project: Onondaga Lake SCA Final Design Project/ Proposal No.: GJ4299 Task No.: 04

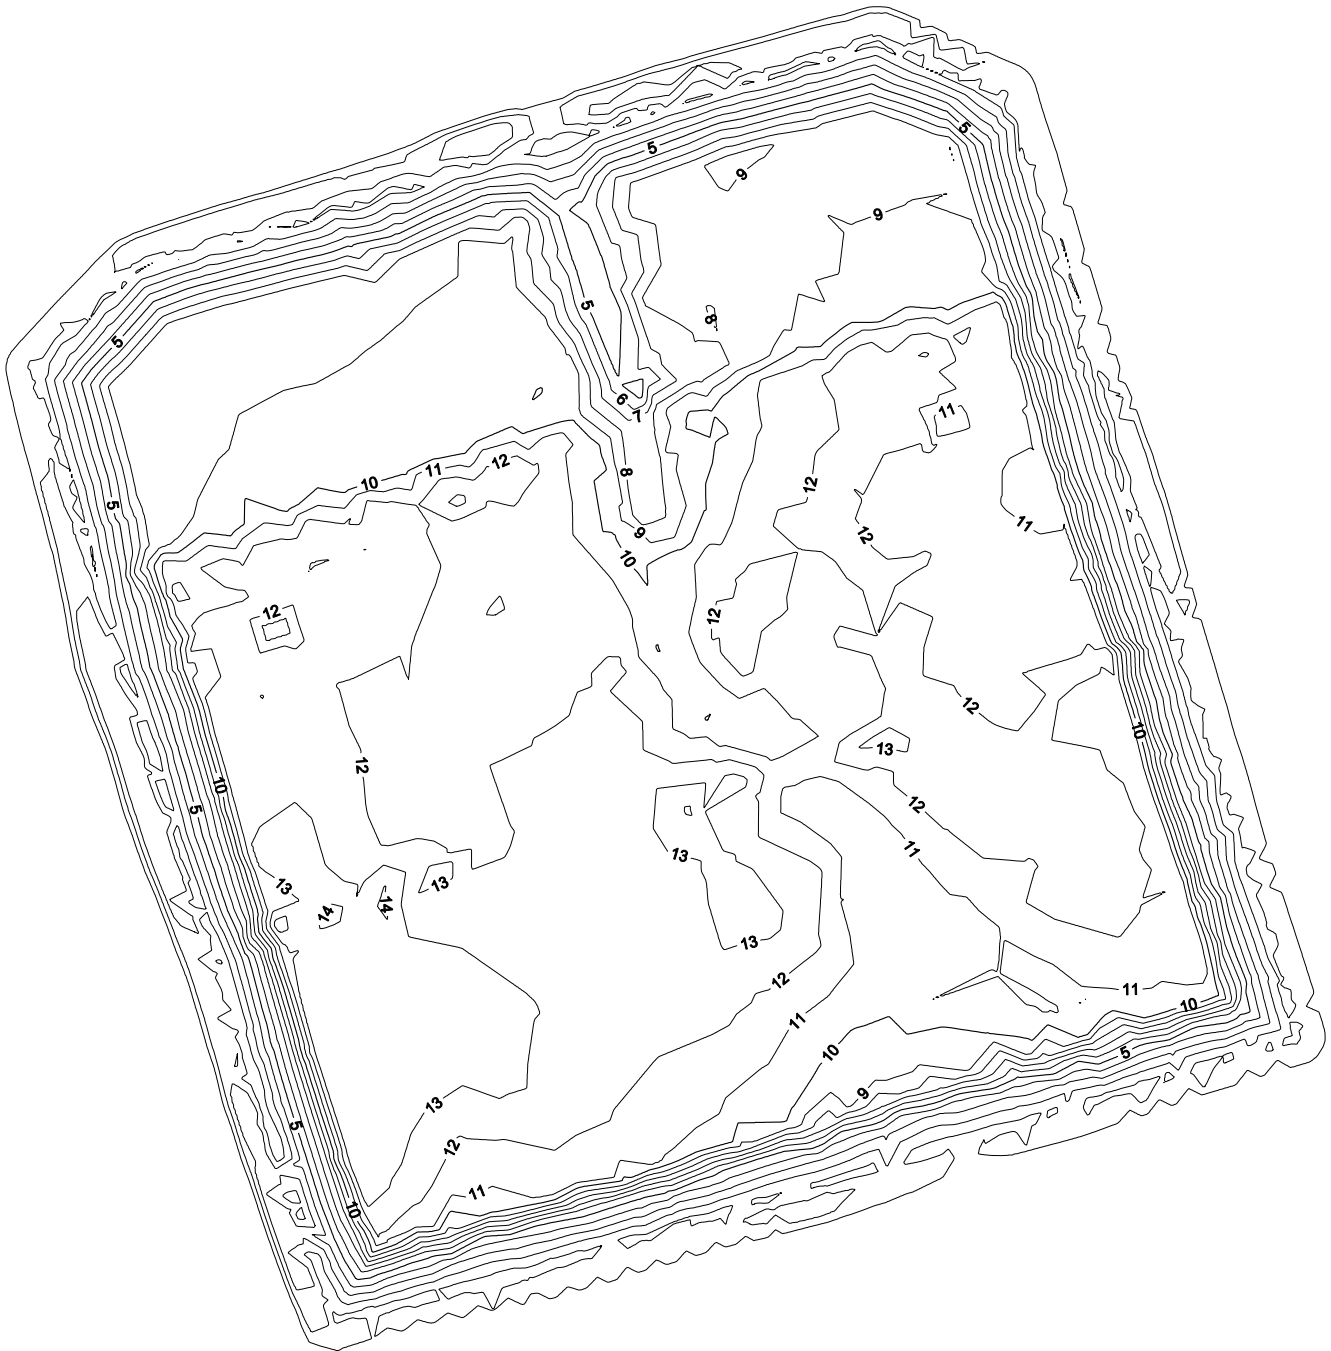


Figure 14. CASE 2: Top of Dredge Material in Geo-tubes Settlement from beginning of Year 1 to End of Year 4

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: Honeywell Project: Onondaga Lake SCA Final Design Project/ Proposal No.: GJ4299 Task No.: 04



Figure 15. CASE 2: Top of Dredge Material in Geo-tubes Post-Settlement Elevation at the End of Year 4

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: Honeywell Project: Onondaga Lake SCA Final Design Project/ Proposal No.: GJ4299 Task No.: 04

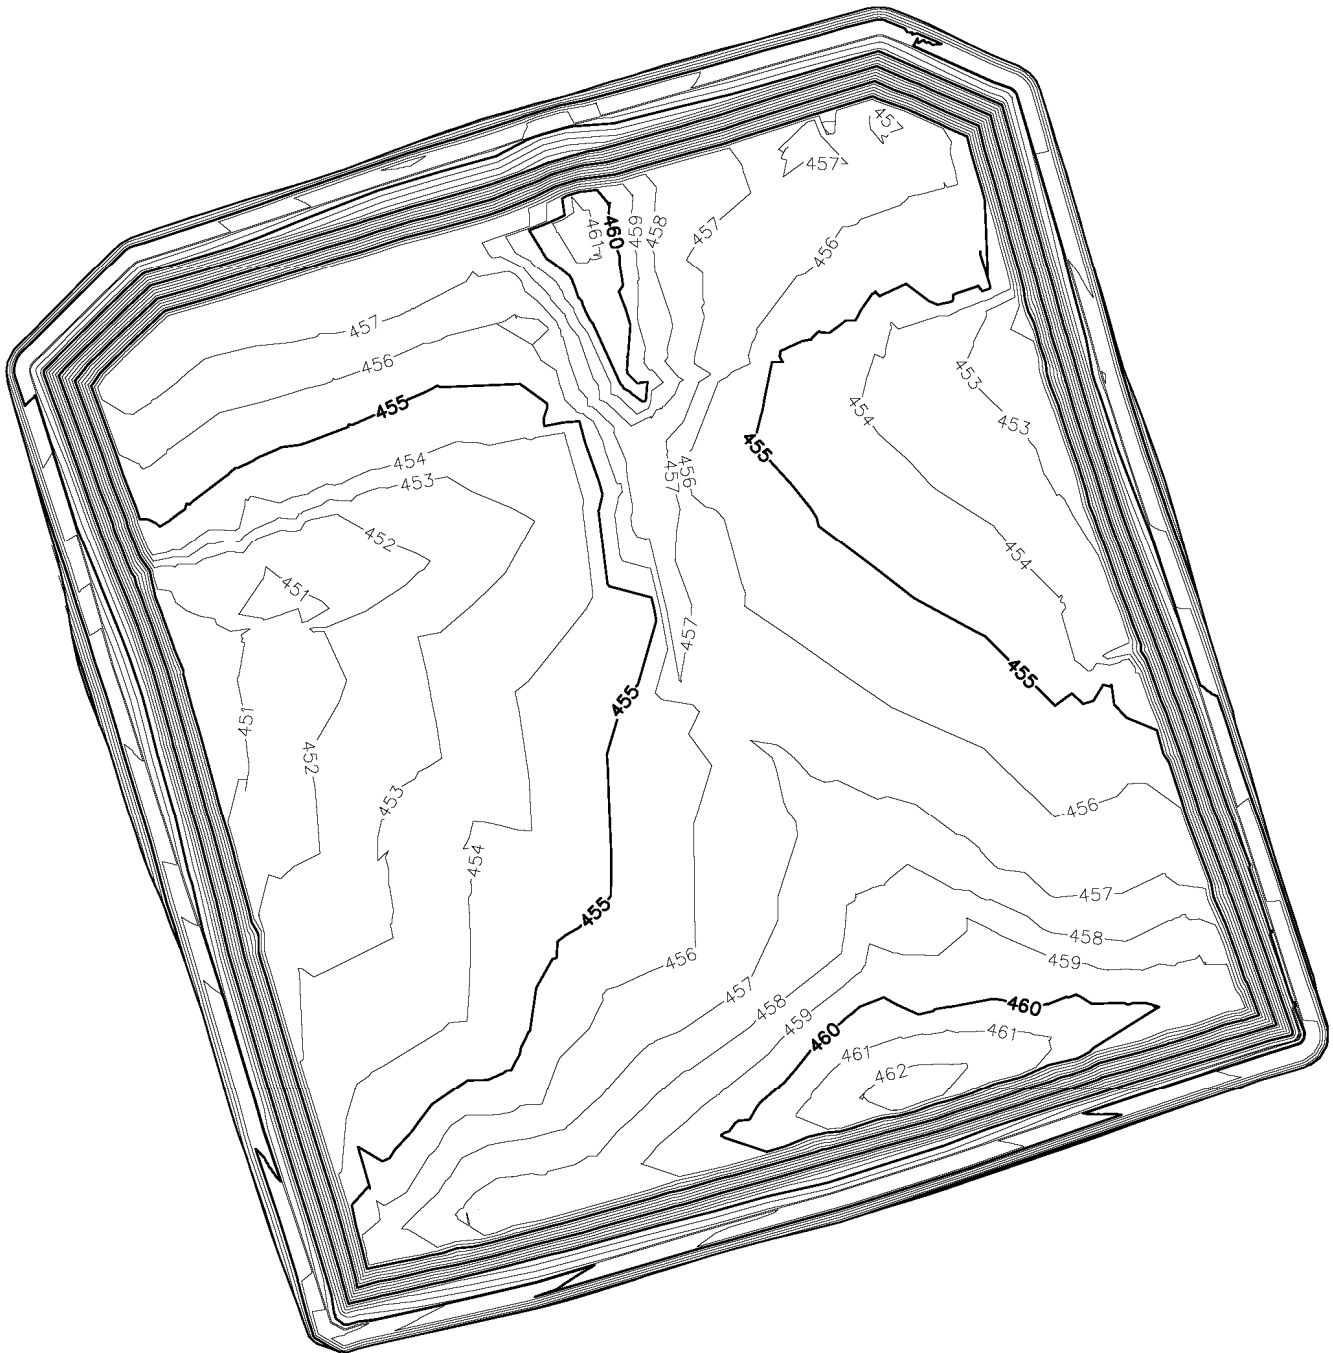


Figure 16. Proposed Pre-settlement Final Cover System Grading Plan at Beginning of Year 5

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: Honeywell Project: Onondaga Lake SCA Final Design Project/ Proposal No.: GJ4299 Task No.: 04

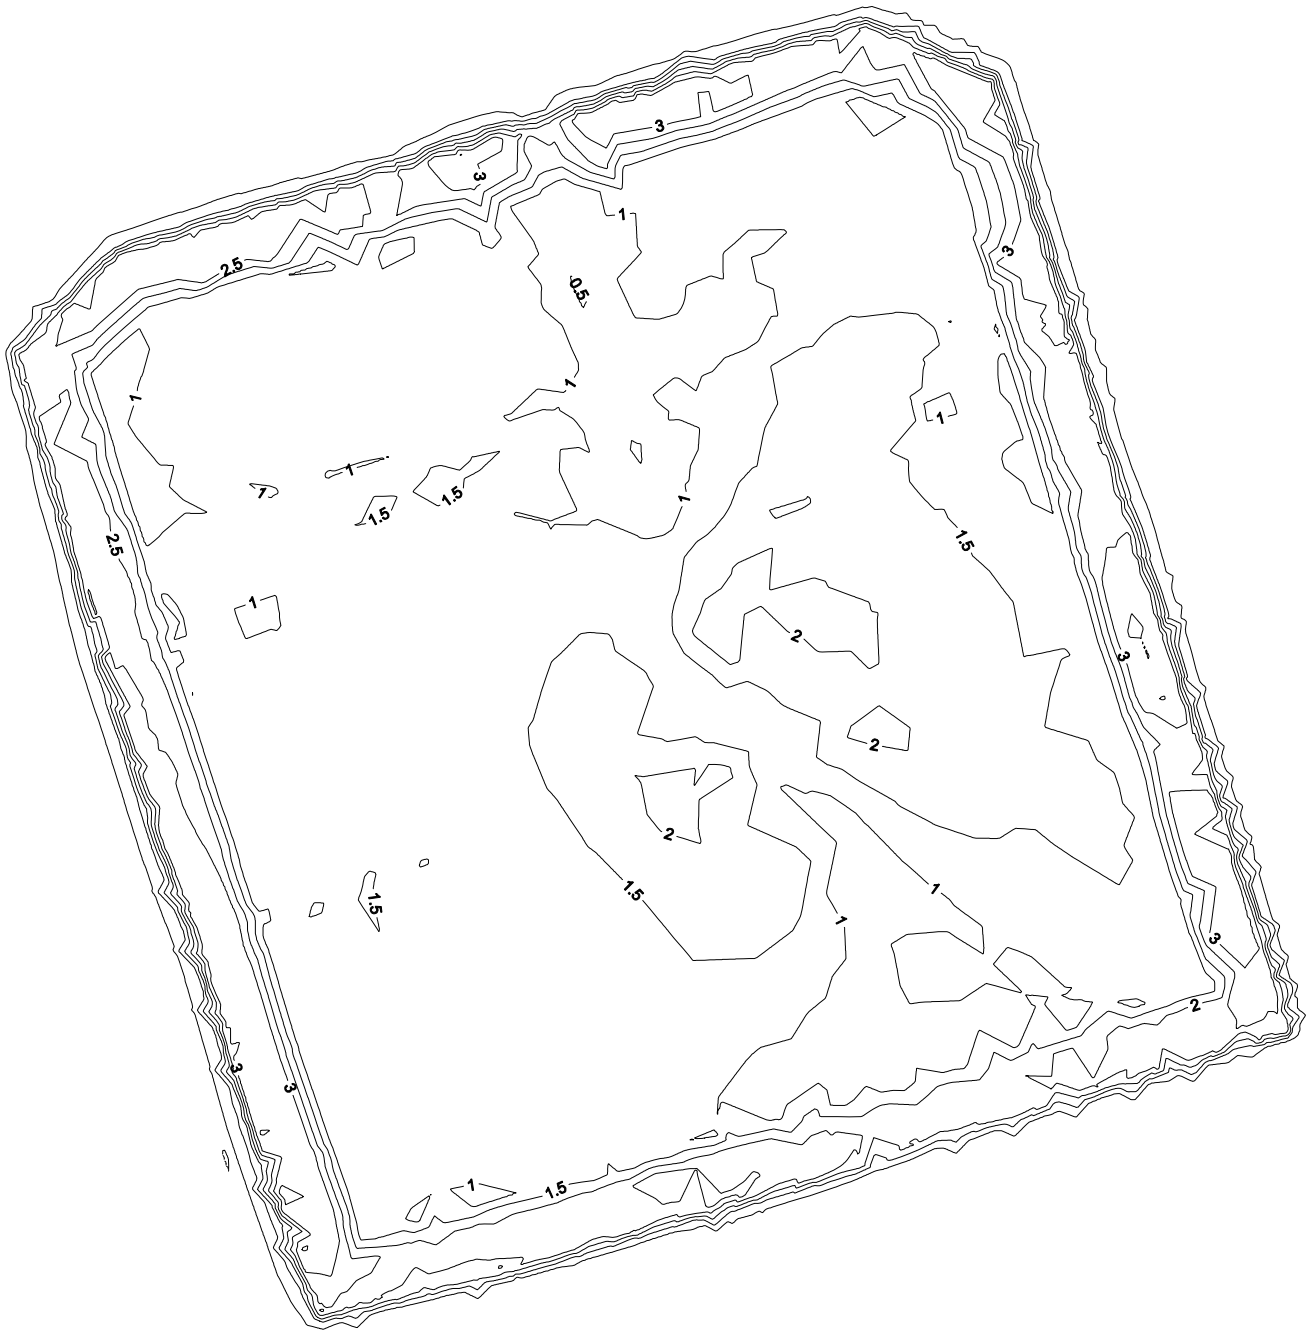


Figure 17. CASE 3: Top of LPSL Settlement from End of Year 4 to End of Year 35

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: Honeywell Project: Onondaga Lake SCA Final Design Project/ Proposal No.: GJ4299 Task No.: 04

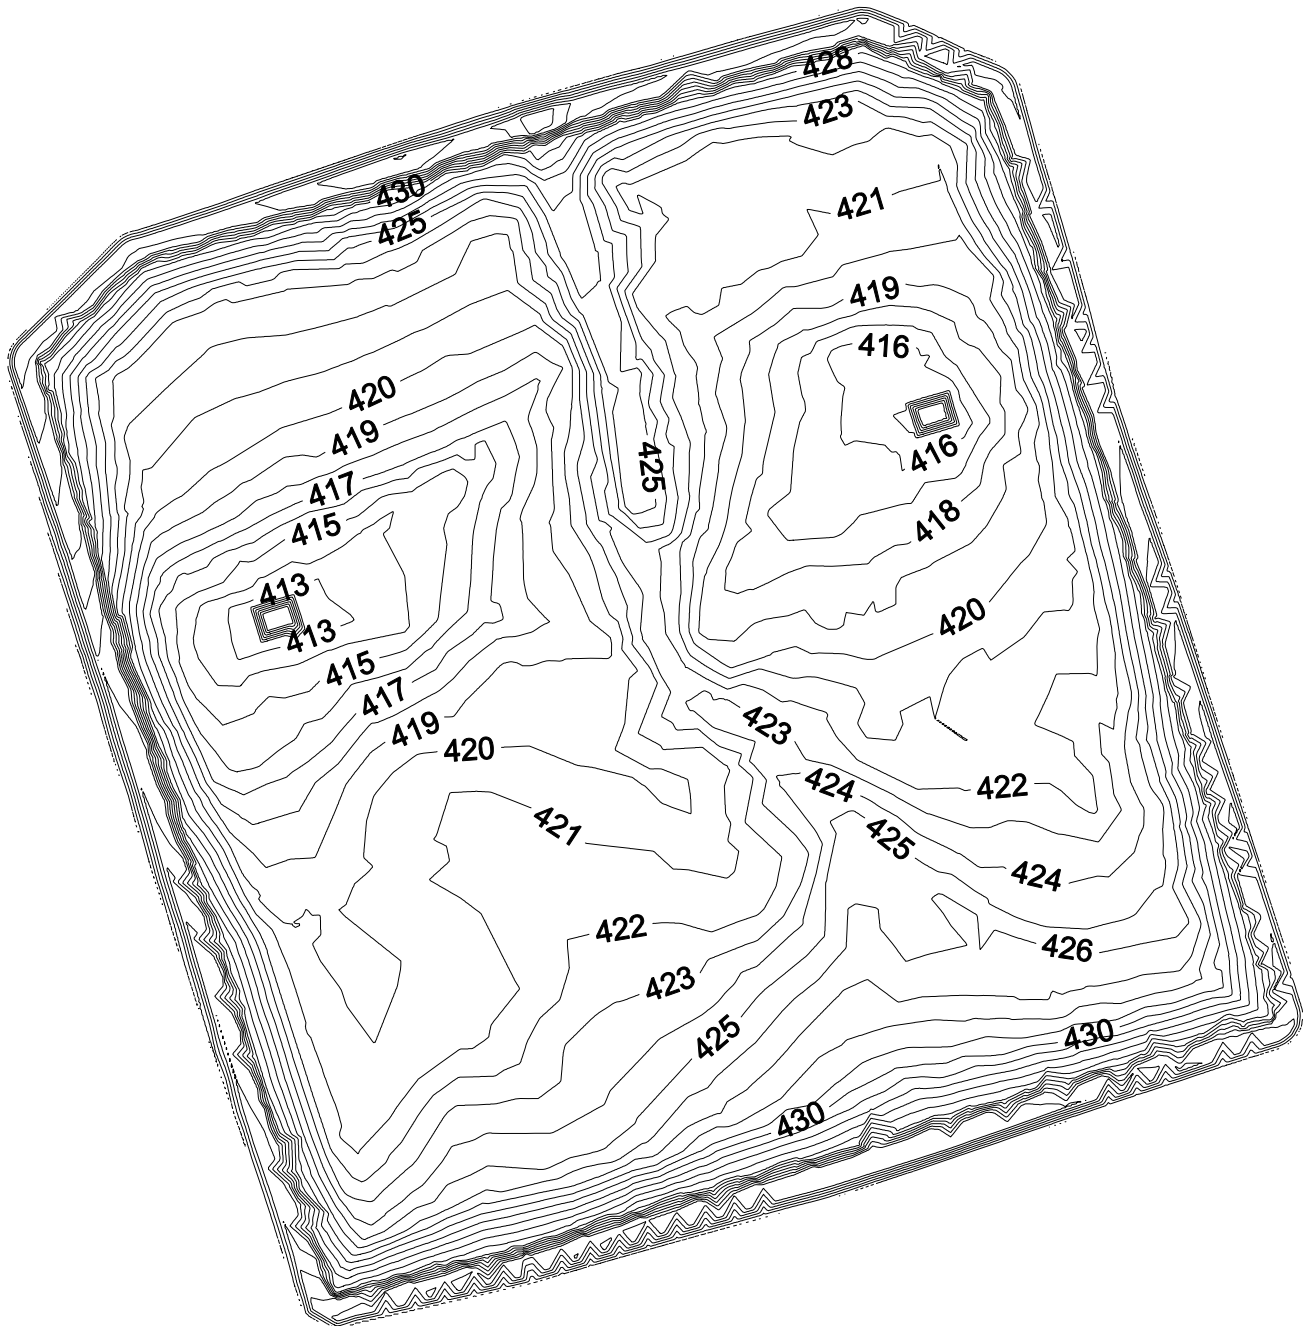


Figure 18. CASE 3: Top of LPSL Post-Settlement Elevations at End of Year 35

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: Honeywell Project: Onondaga Lake SCA Final Design Project/ Proposal No.: GJ4299 Task No.: 04



Figure 19. CASE 4: Top of Final Cover Settlement from End of Year 4 to End of Year 35

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: Honeywell Project: Onondaga Lake SCA Final Design Project/ Proposal No.: GJ4299 Task No.: 04

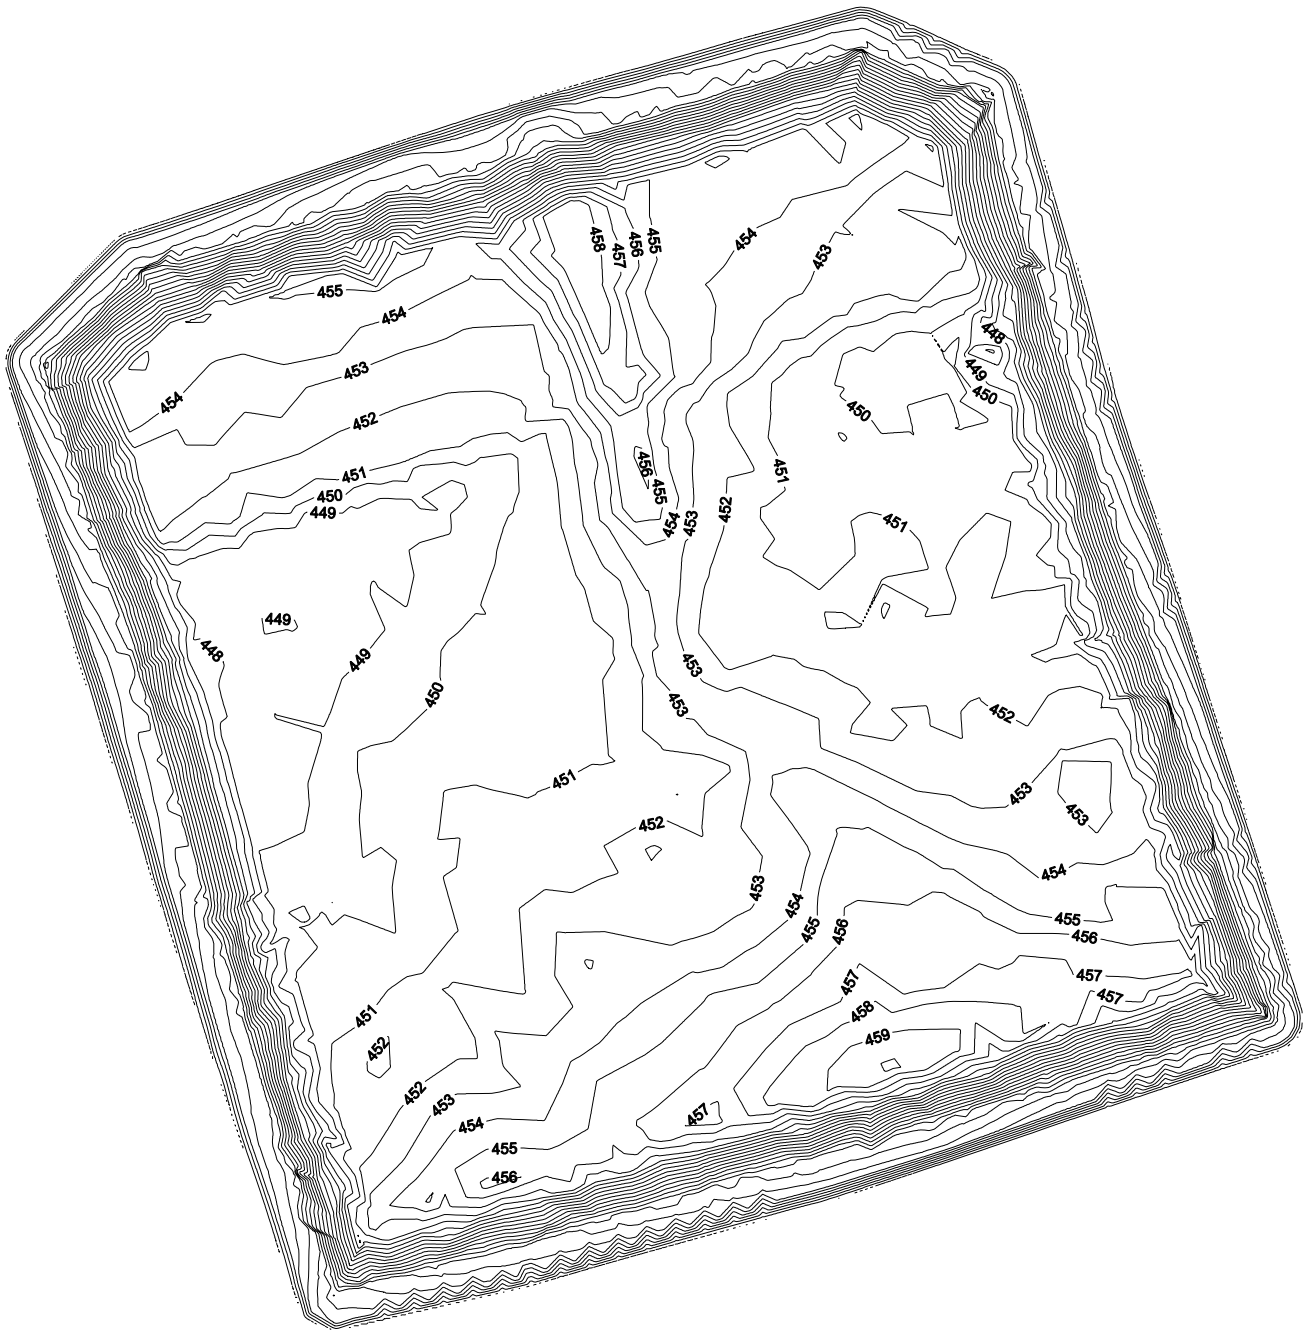


Figure 20. CASE 4: Top of Final Cover Post-Settlement Elevations at End of Year 35

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**


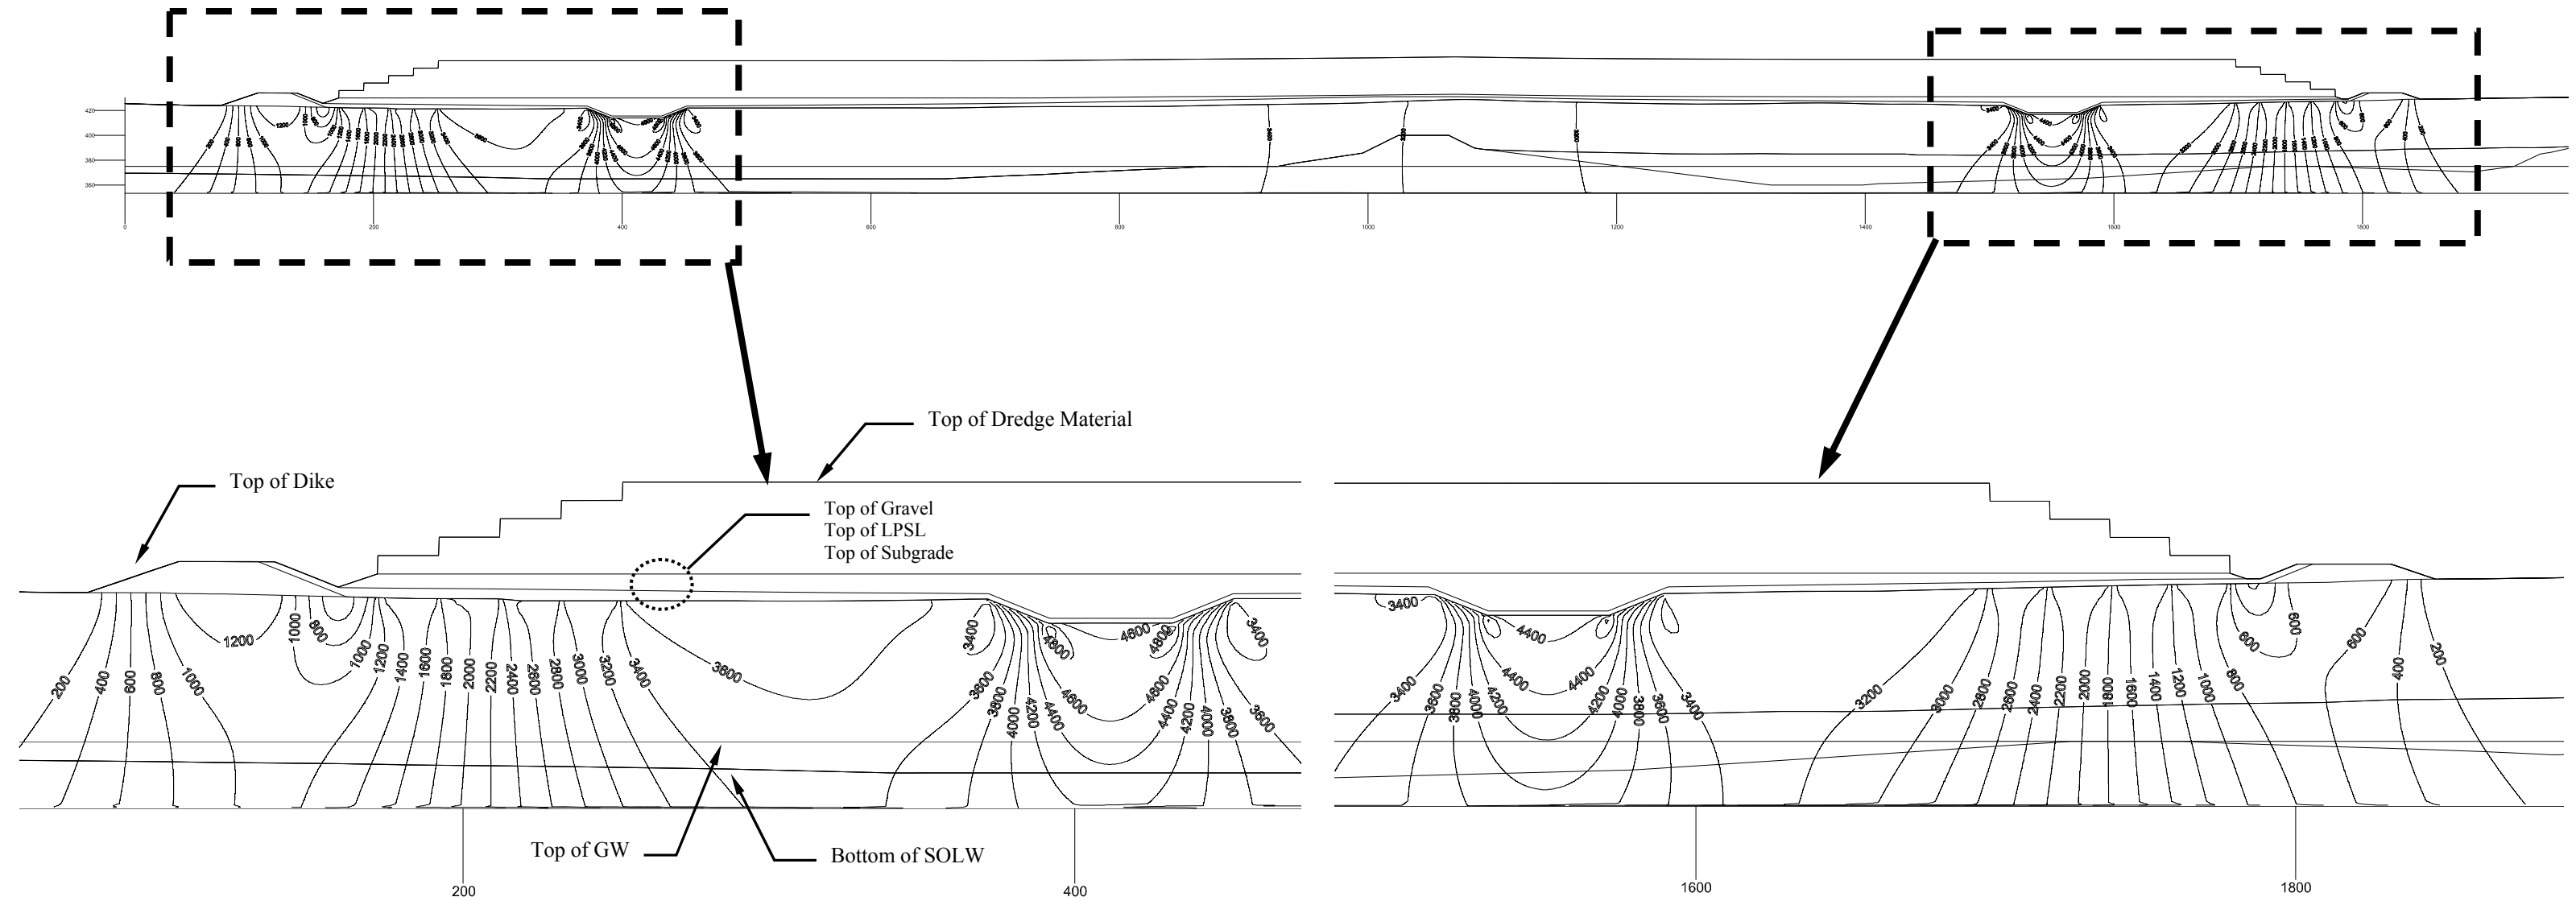


Figure 21. CASE 5: Stress Distribution of Geo-tubes, Liner, and Dike Loading along Cross Section A (units in psf)

Cross Section A Pre- vs. Post- Foundation Settlement Profile, End of YR4

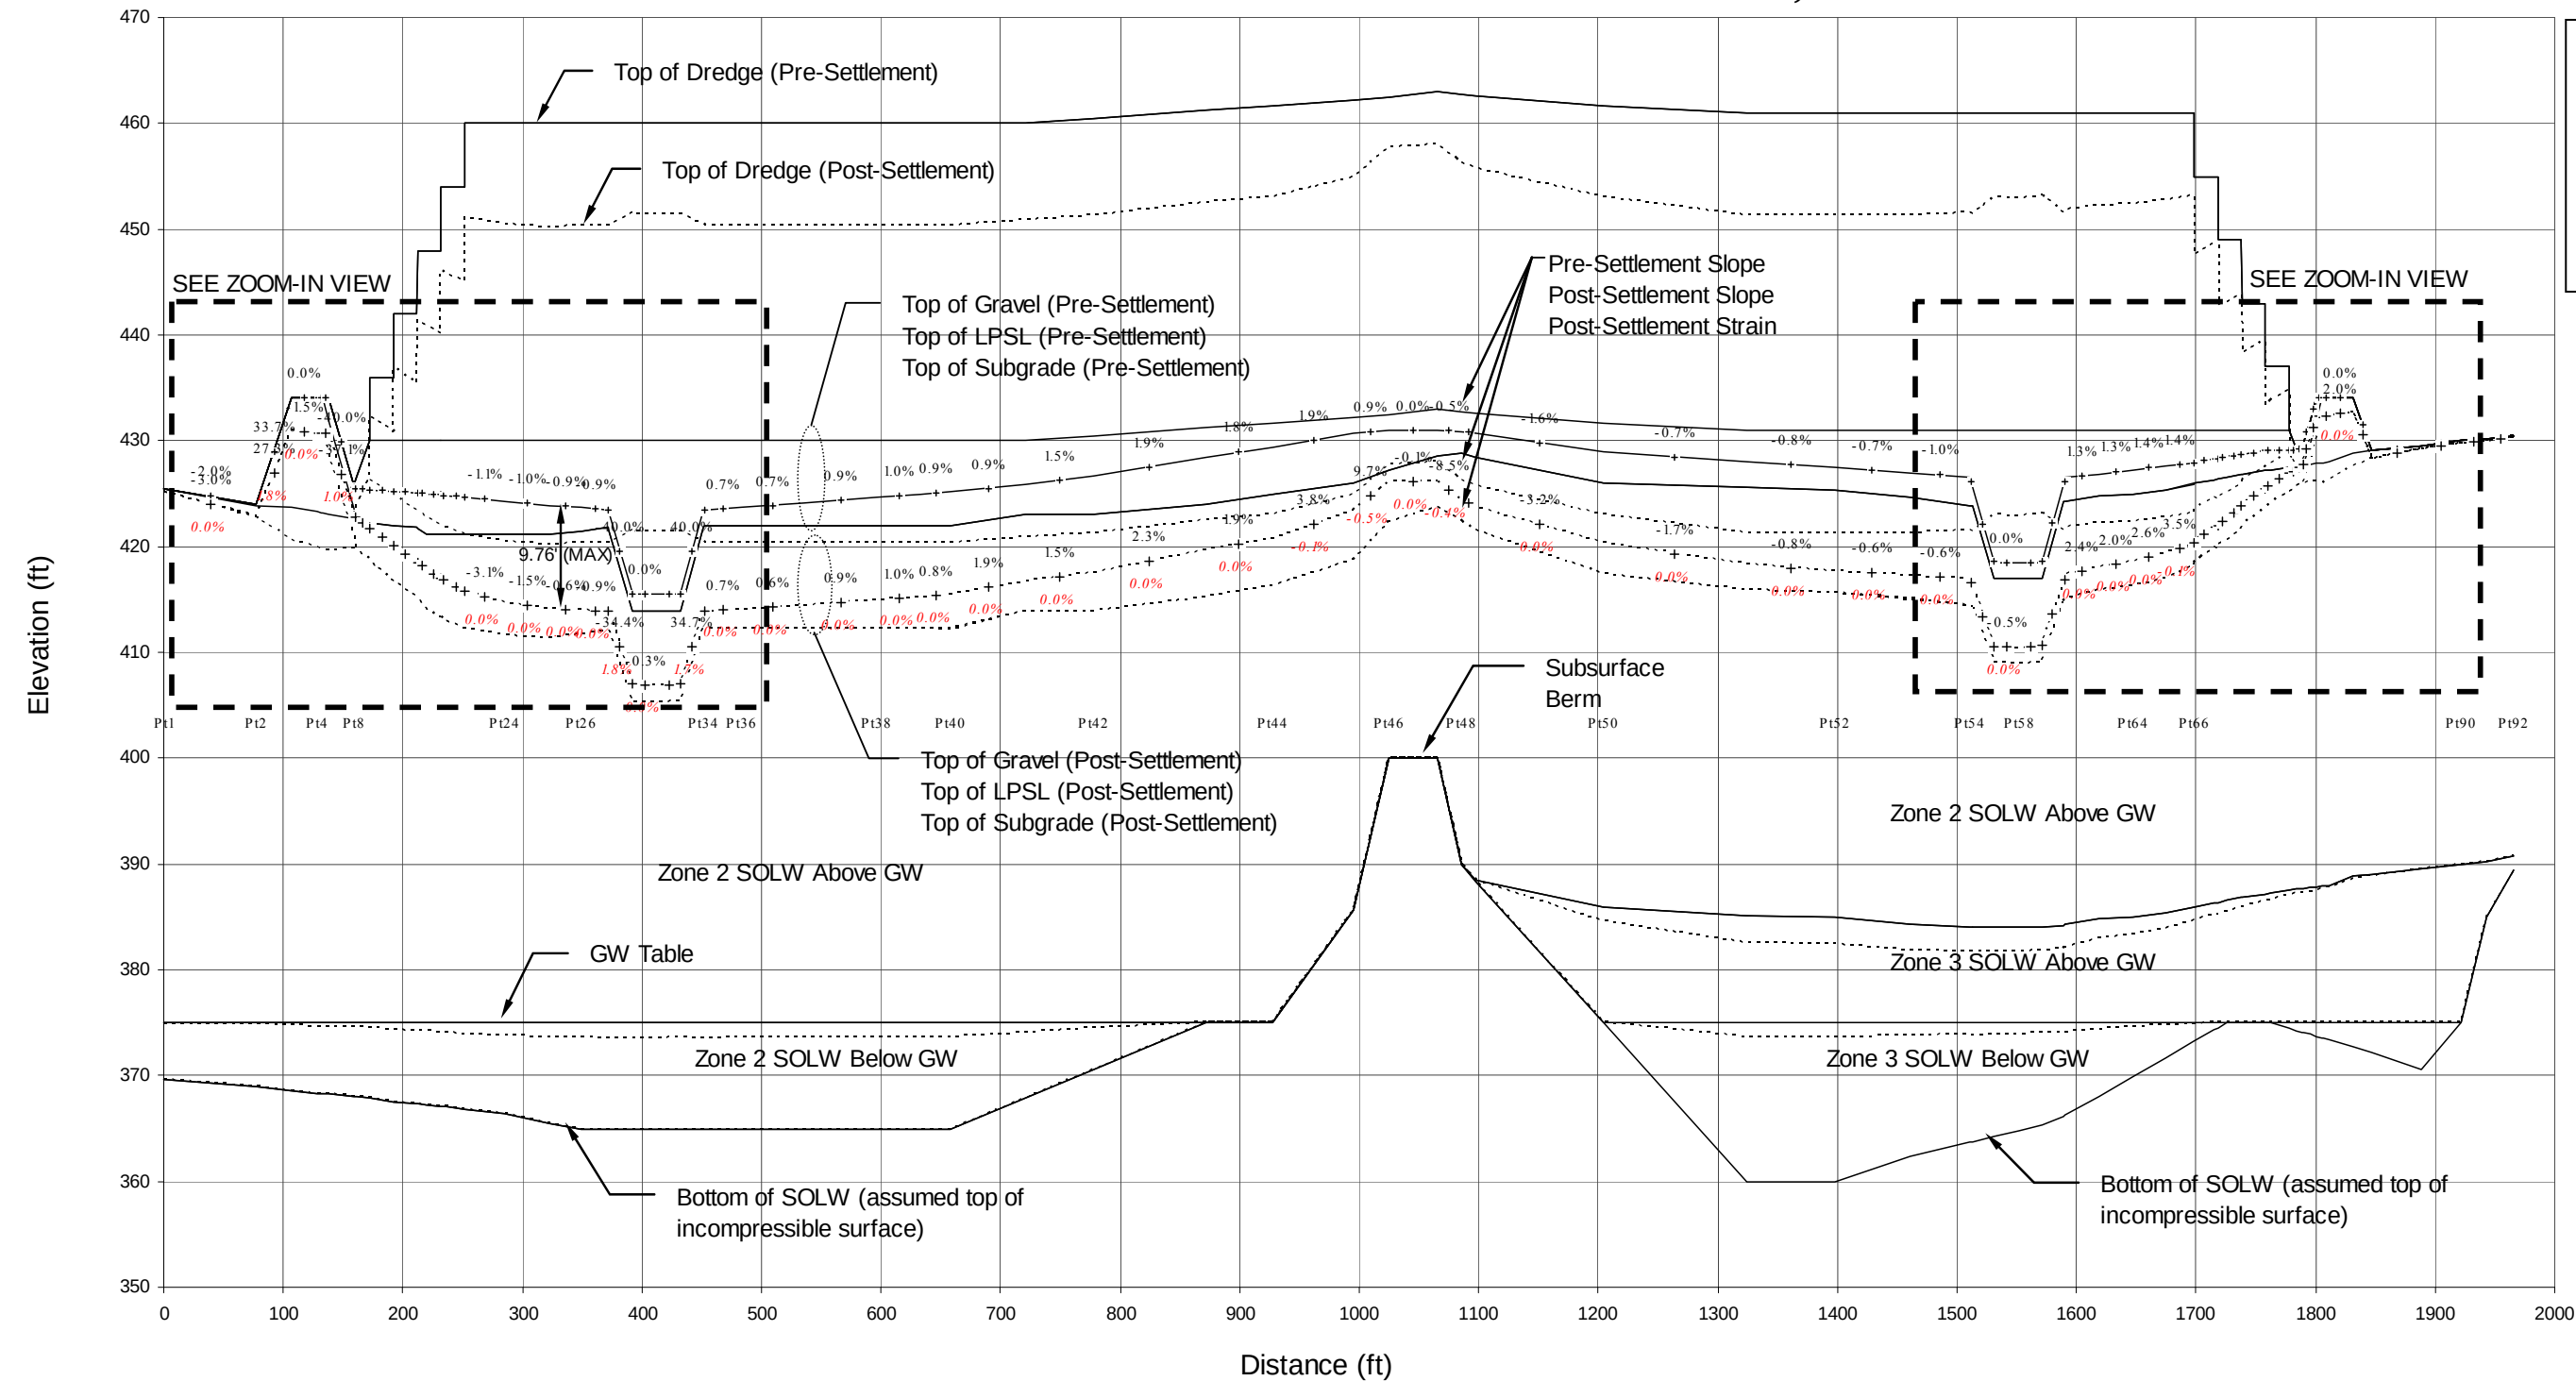

NOTE:
The compressibility of dredge materials in geo-tubes was not considered in the foundation settlement analysis because they are considered as load. Please see Case 6 analysis results for calculated top of dredge post-settlement elevations.

Figure 22. CASE 5: Foundation Settlement Analysis Result for Cross Section A (Overall View)

Cross Section A Pre- vs. Post- Foundation Settlement Profile, End of YR4

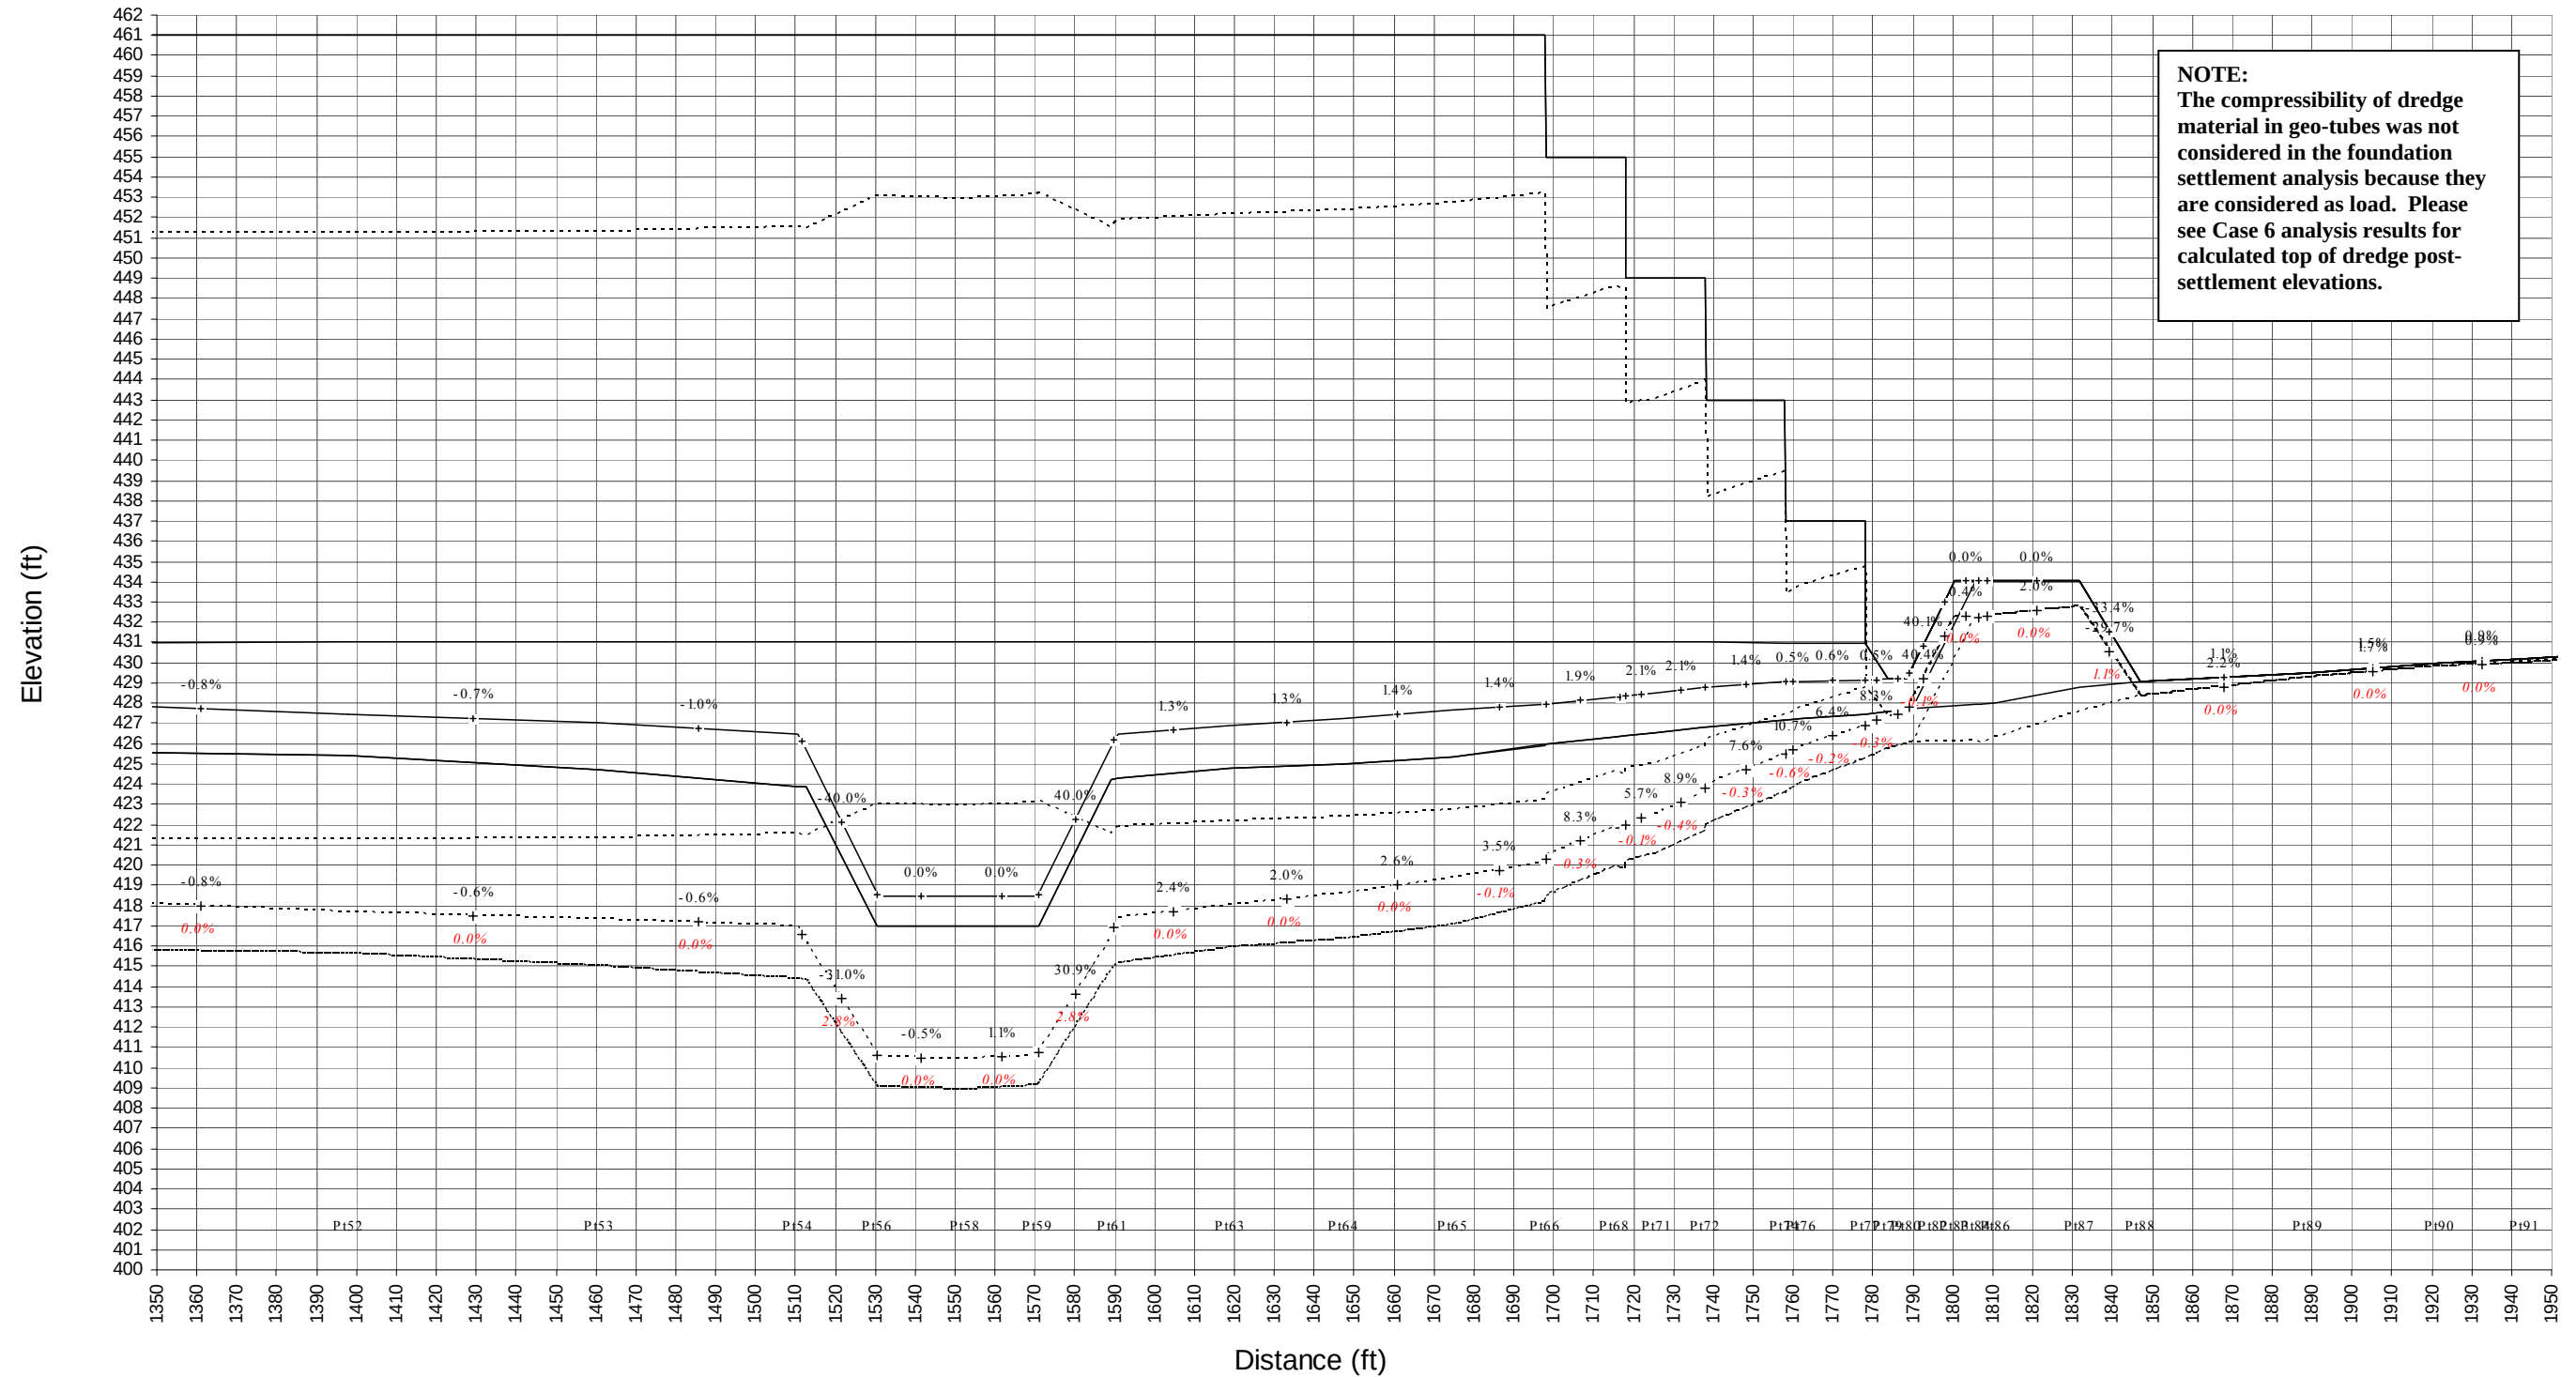


Figure 24. CASE 5: Foundation Settlement Analysis Result for Cross Section A (Zoom-in View, Right Berm and Sump)

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**


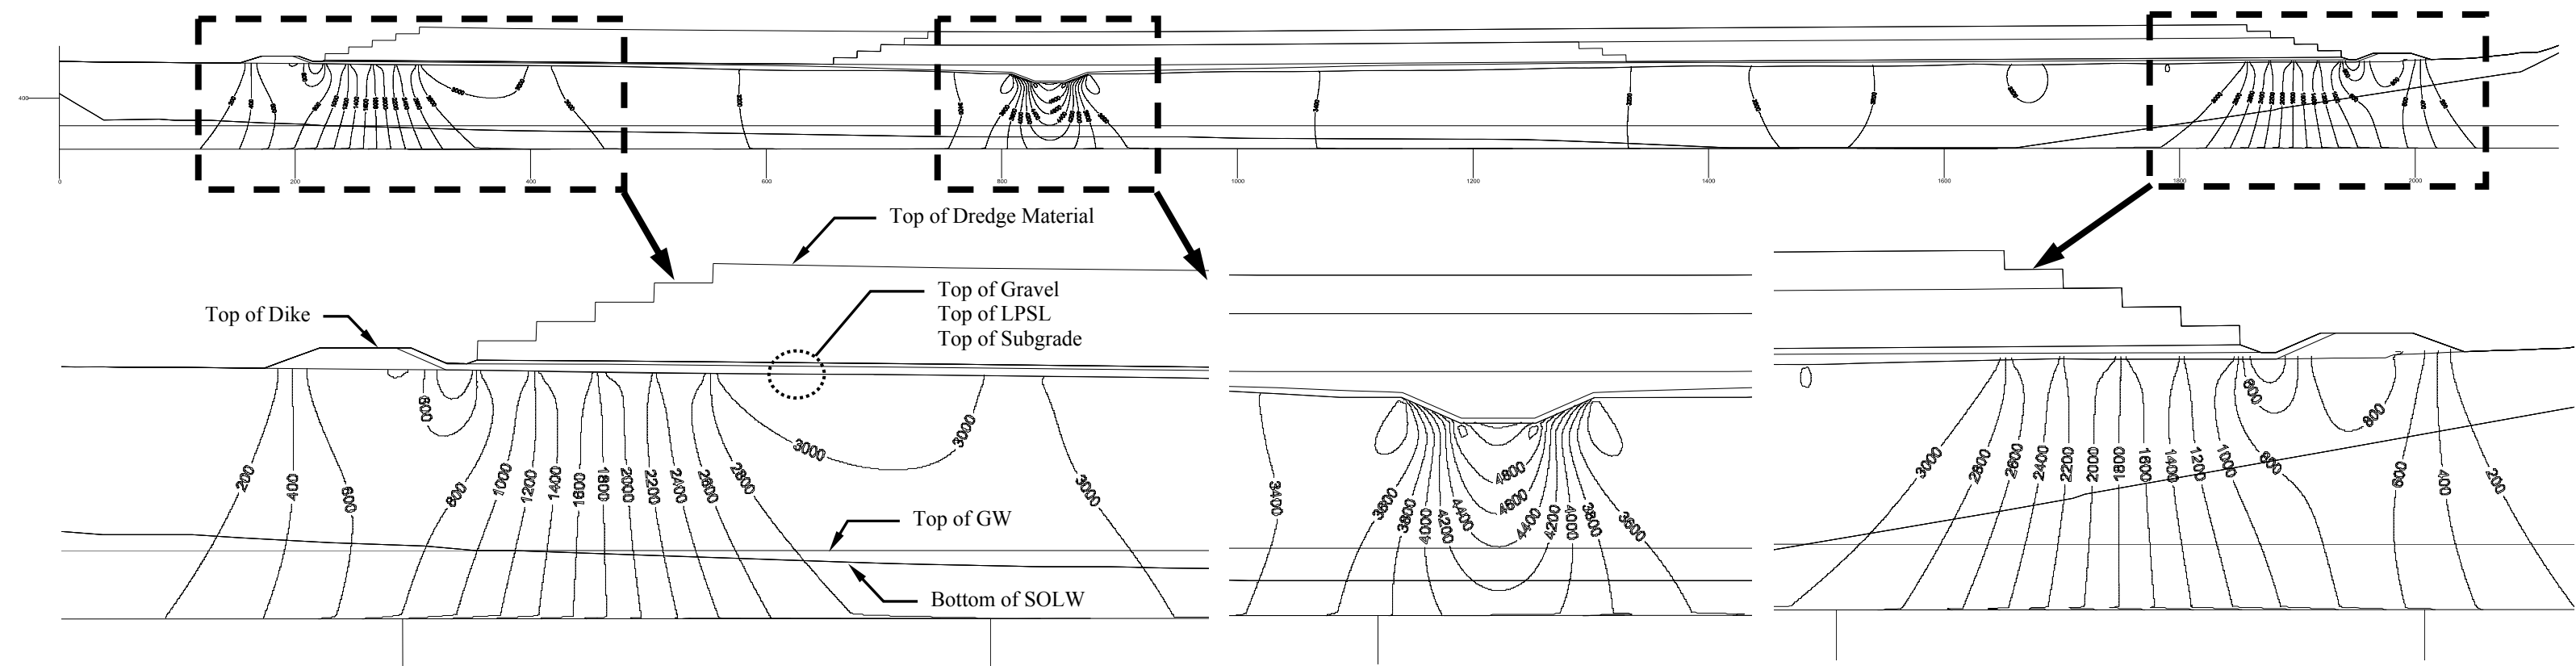


Figure 25. CASE 5: Stress Distribution of Geo-tube, Liner, and Dike Loading along Cross Section B (units in psf)

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: Honeywell Project: Onondaga Lake SCA Final Design Project/ Proposal No.: GJ4299 Task No.: 04

Cross Section B Pre- vs. Post- Foundation Settlement Profile, End of YR4

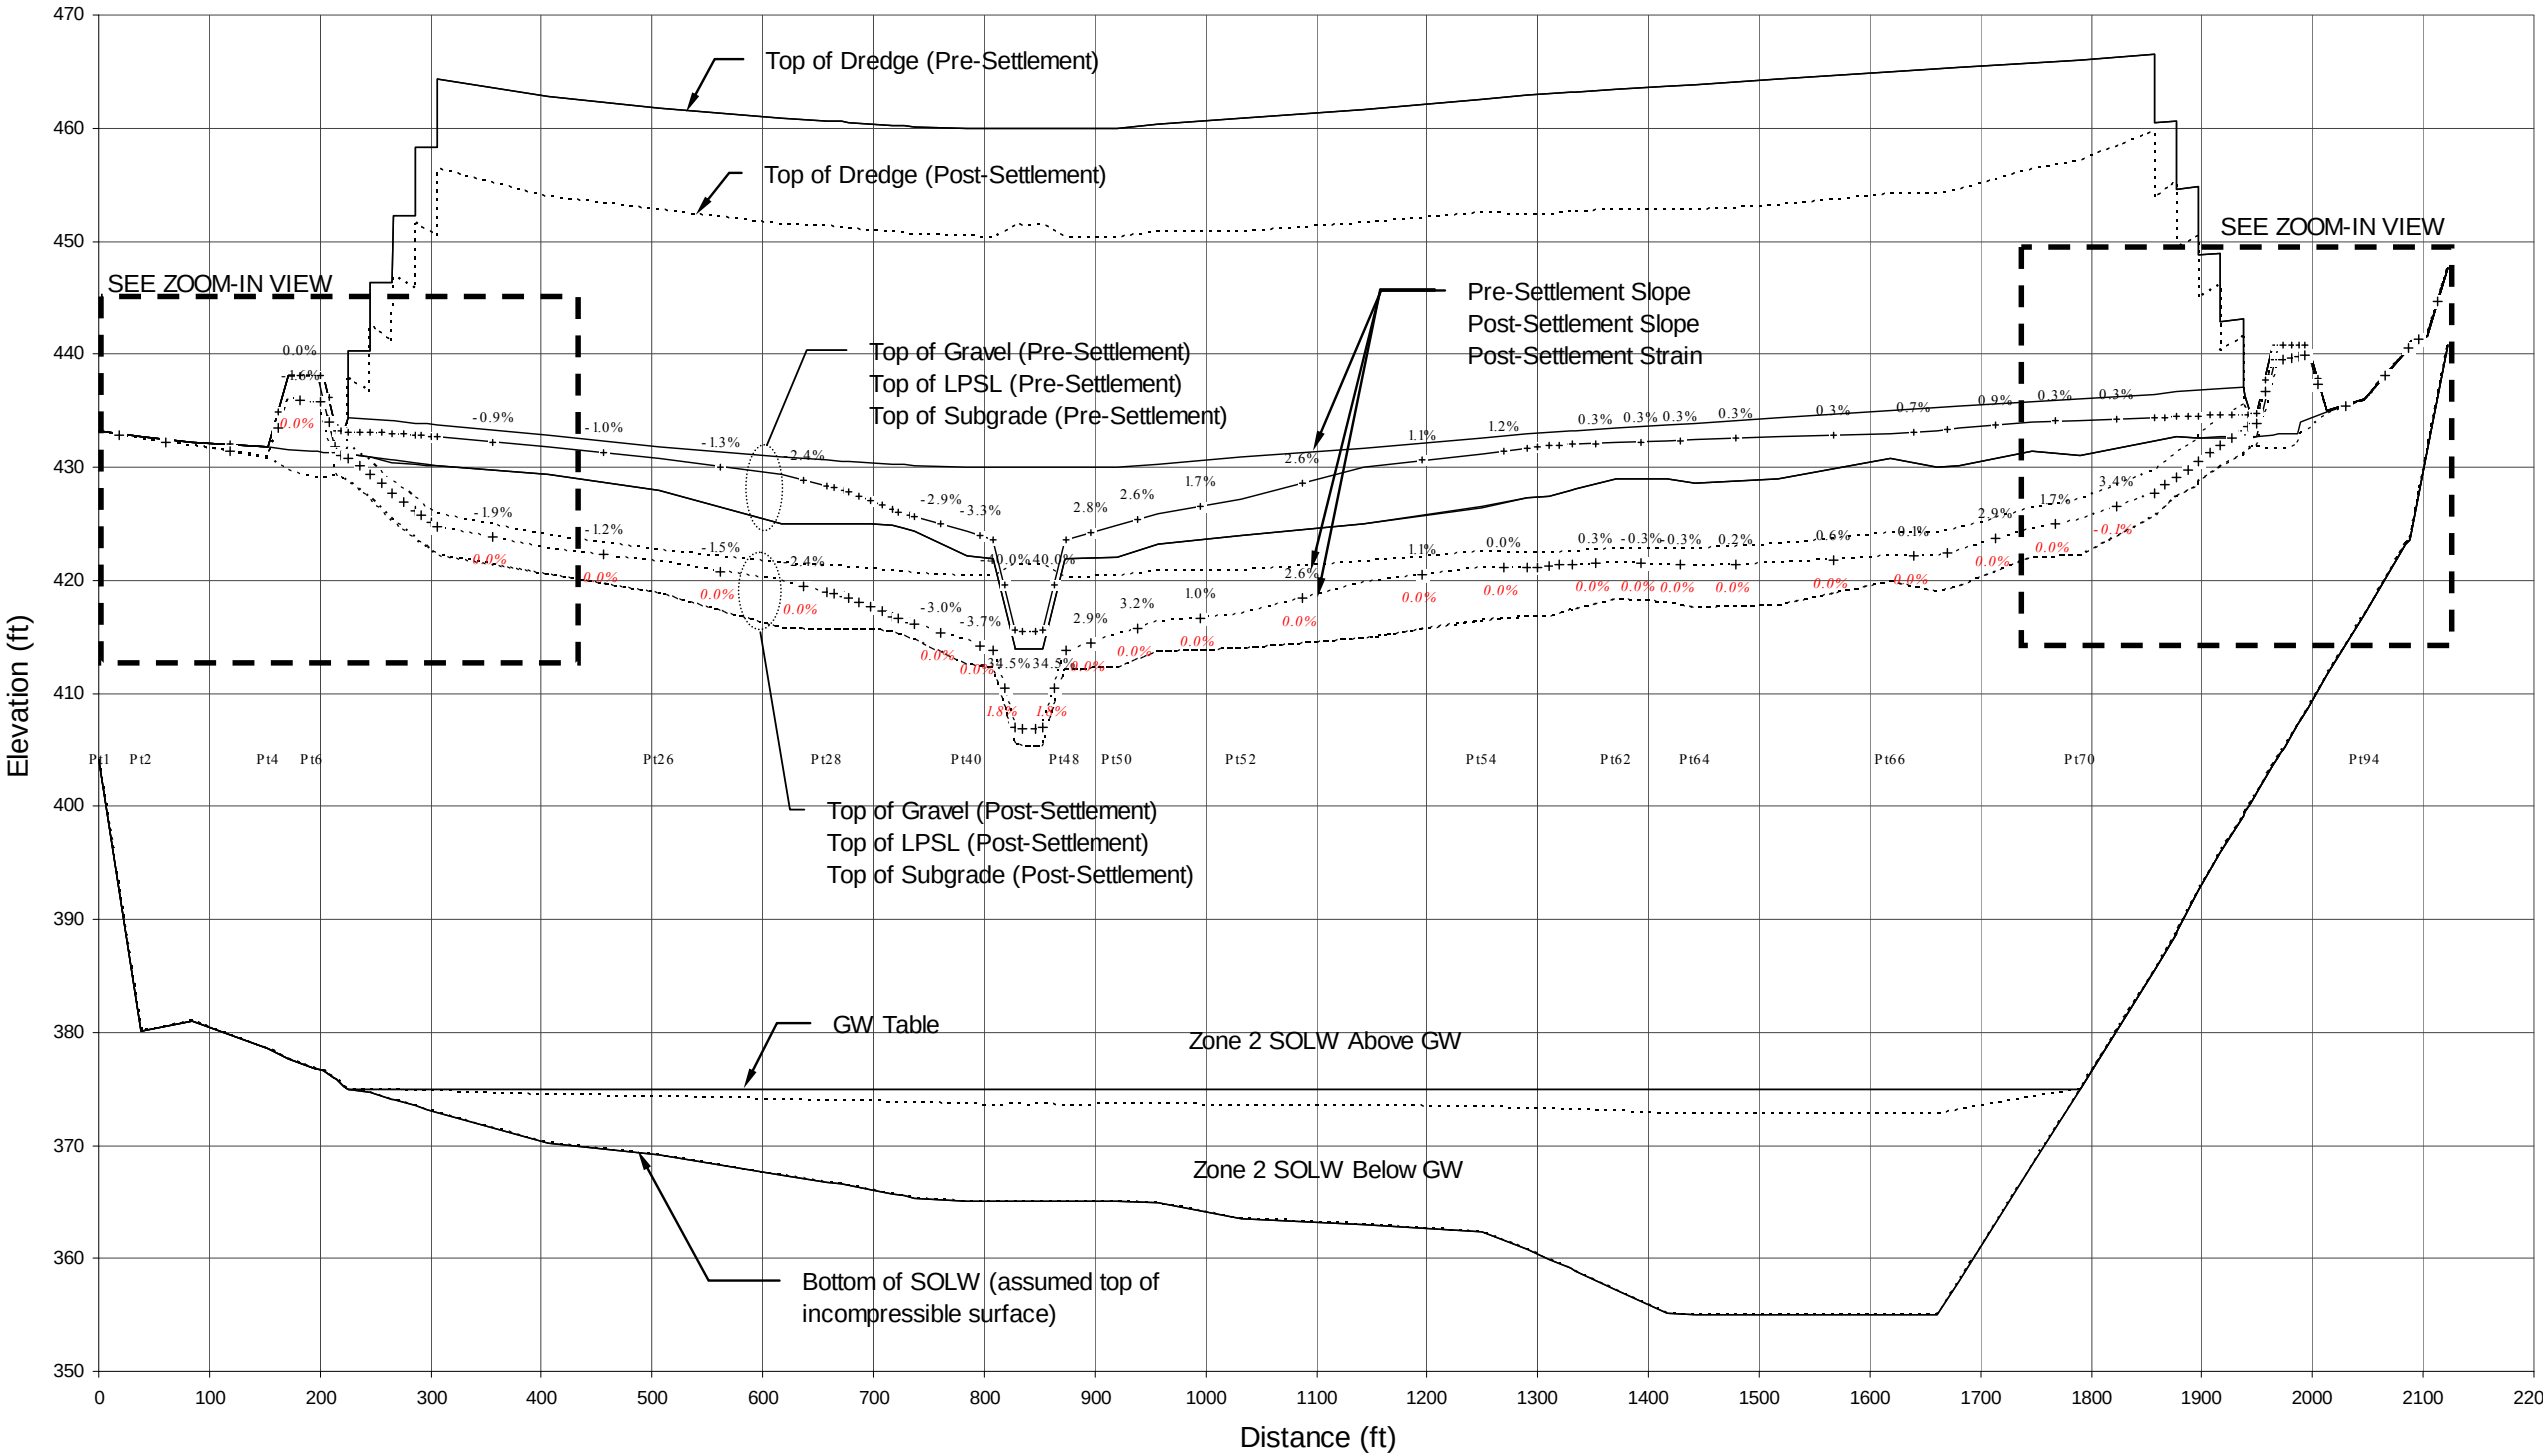

NOTE:
The compressibility of dredge material in geo-tubes was not considered in the foundation settlement analysis because they are considered as load. Please see Case 6 analysis results for calculated top of dredge post-settlement elevations.

Figure 26. CASE 5: Foundation Settlement Analysis Result for Cross Section B (Overall View)

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: Honeywell Project: Onondaga Lake SCA Final Design Project/ Proposal No.: GJ4299 Task No.: 04

Cross Section B Pre- vs. Post- Foundation Settlement Profile, End of YR4

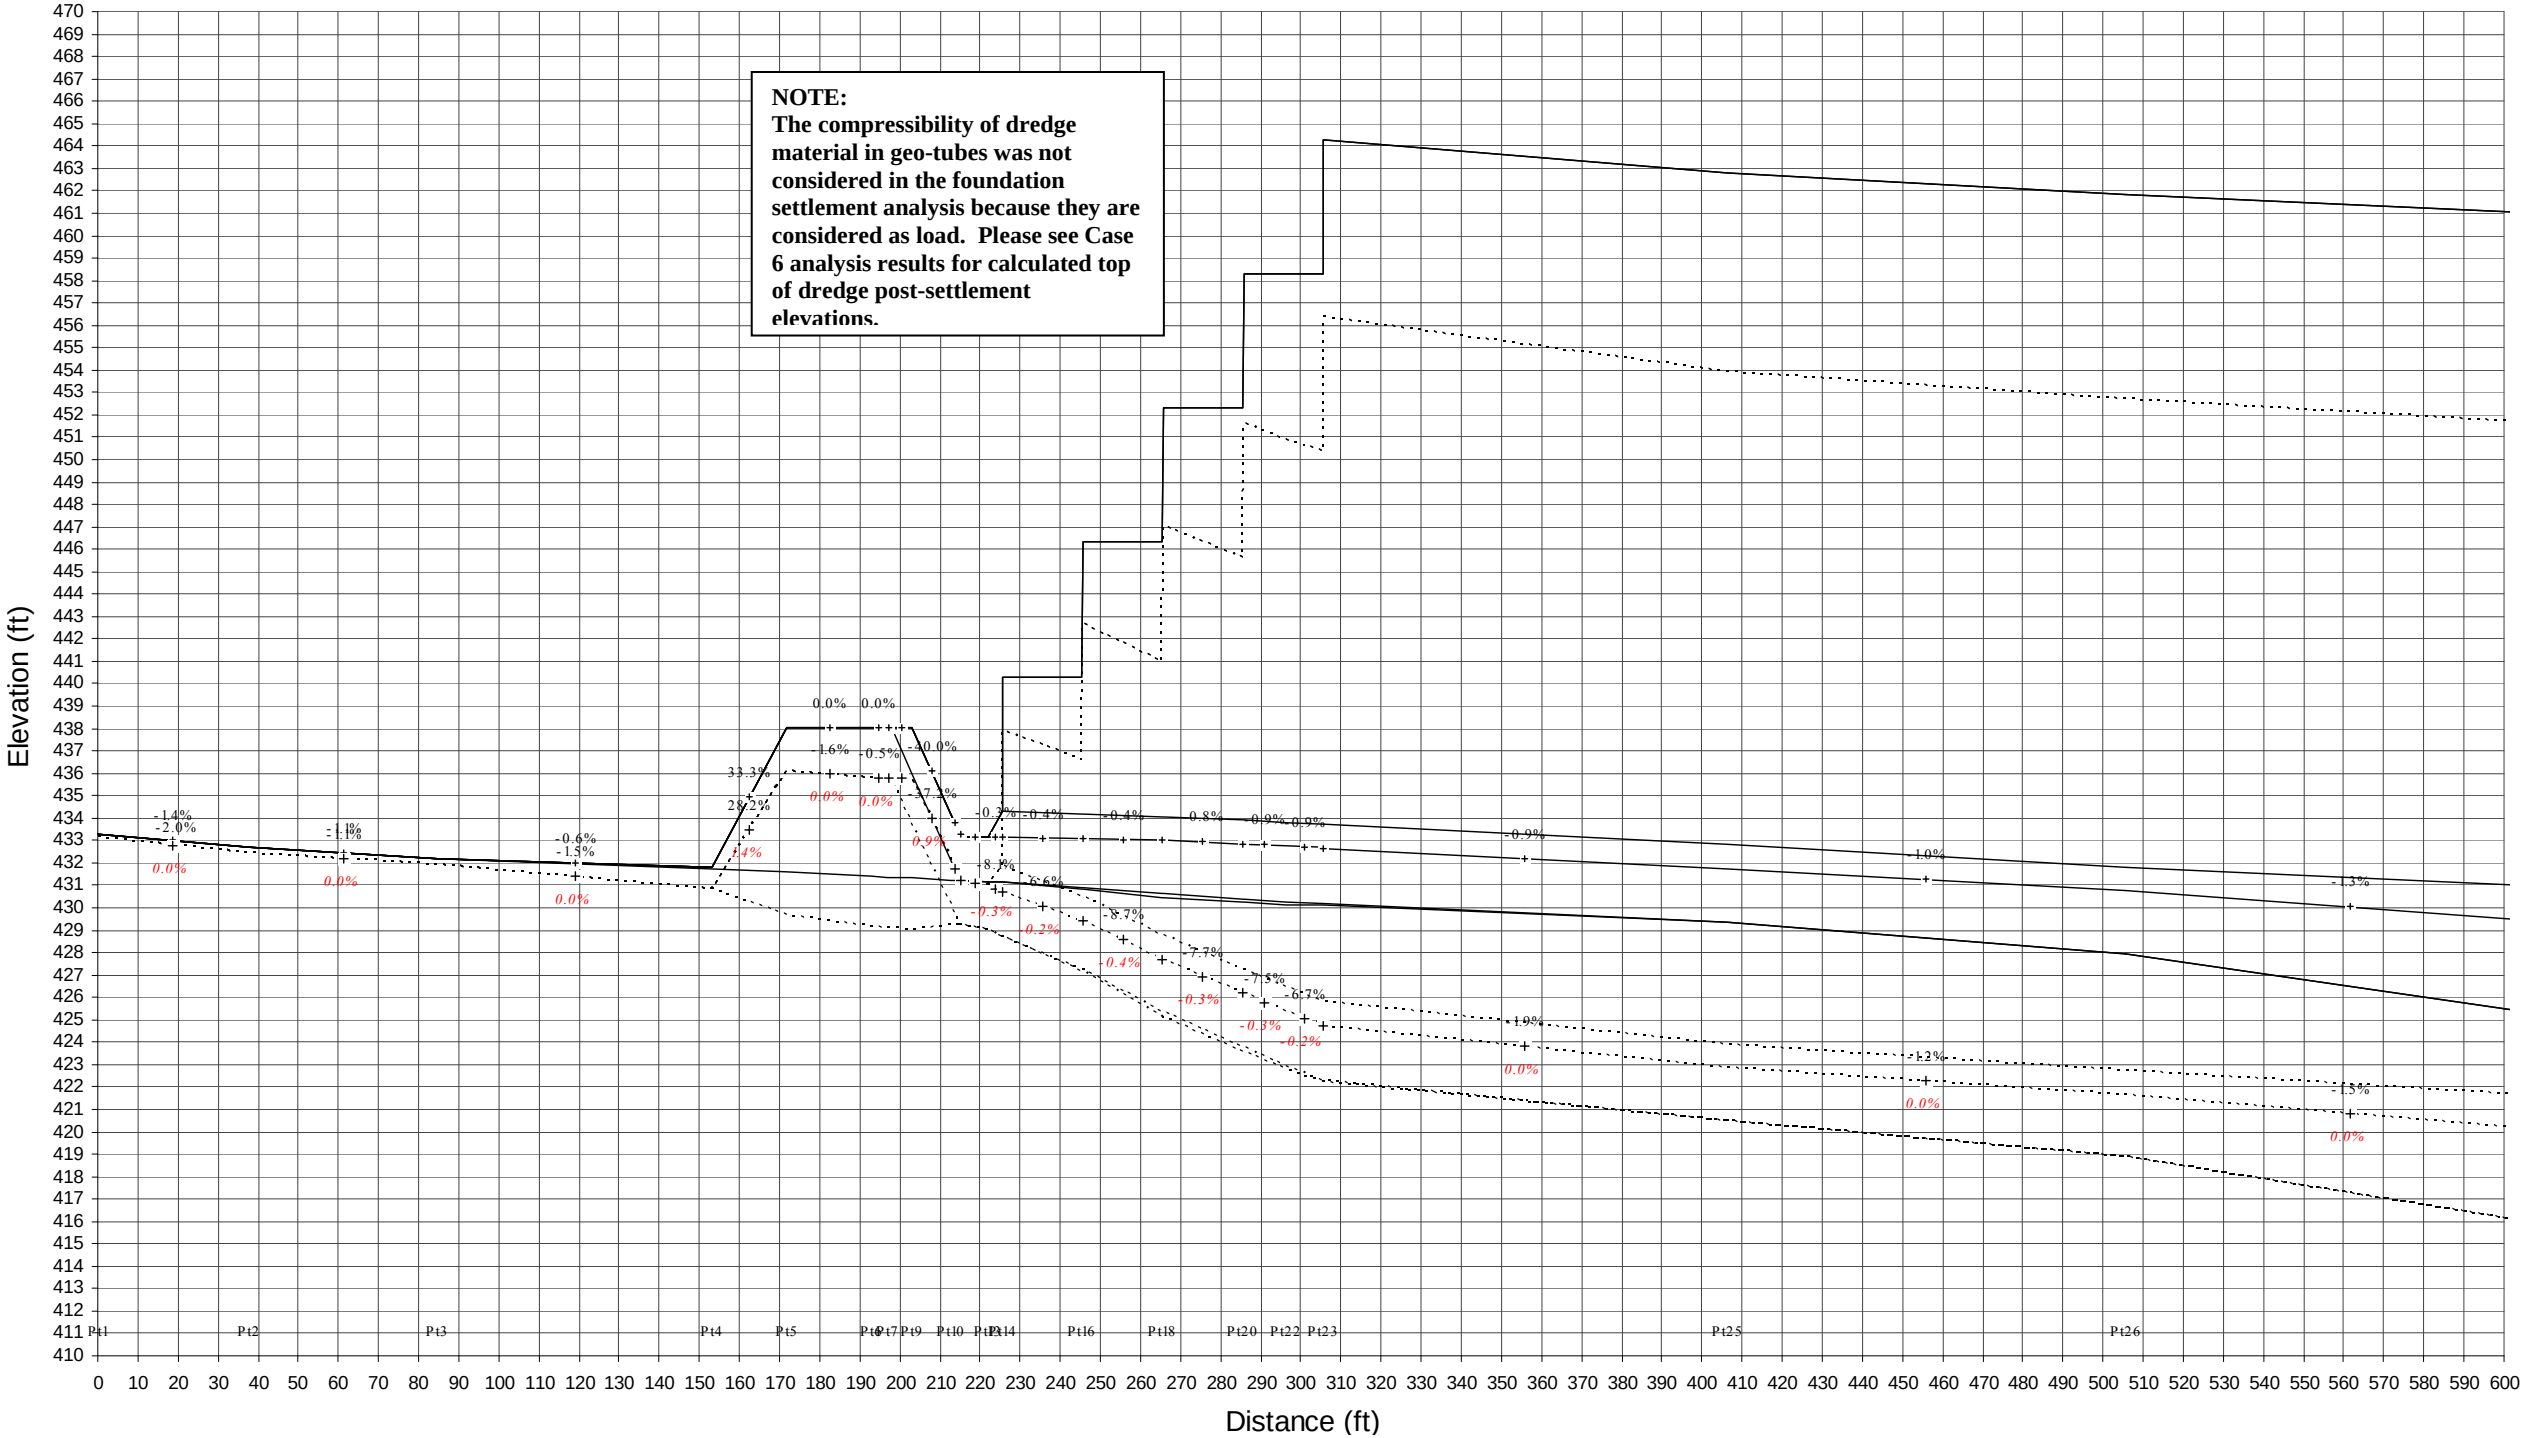


Figure 27. CASE 5: Foundation Settlement Analysis Result for Cross Section B (Zoom-in View, Left Berm)

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: Honeywell Project: Onondaga Lake SCA Final Design Project/ Proposal No.: GJ4299 Task No.: 04

Cross Section A Pre- vs. Post- Cover Settlement Profile, End of YR4

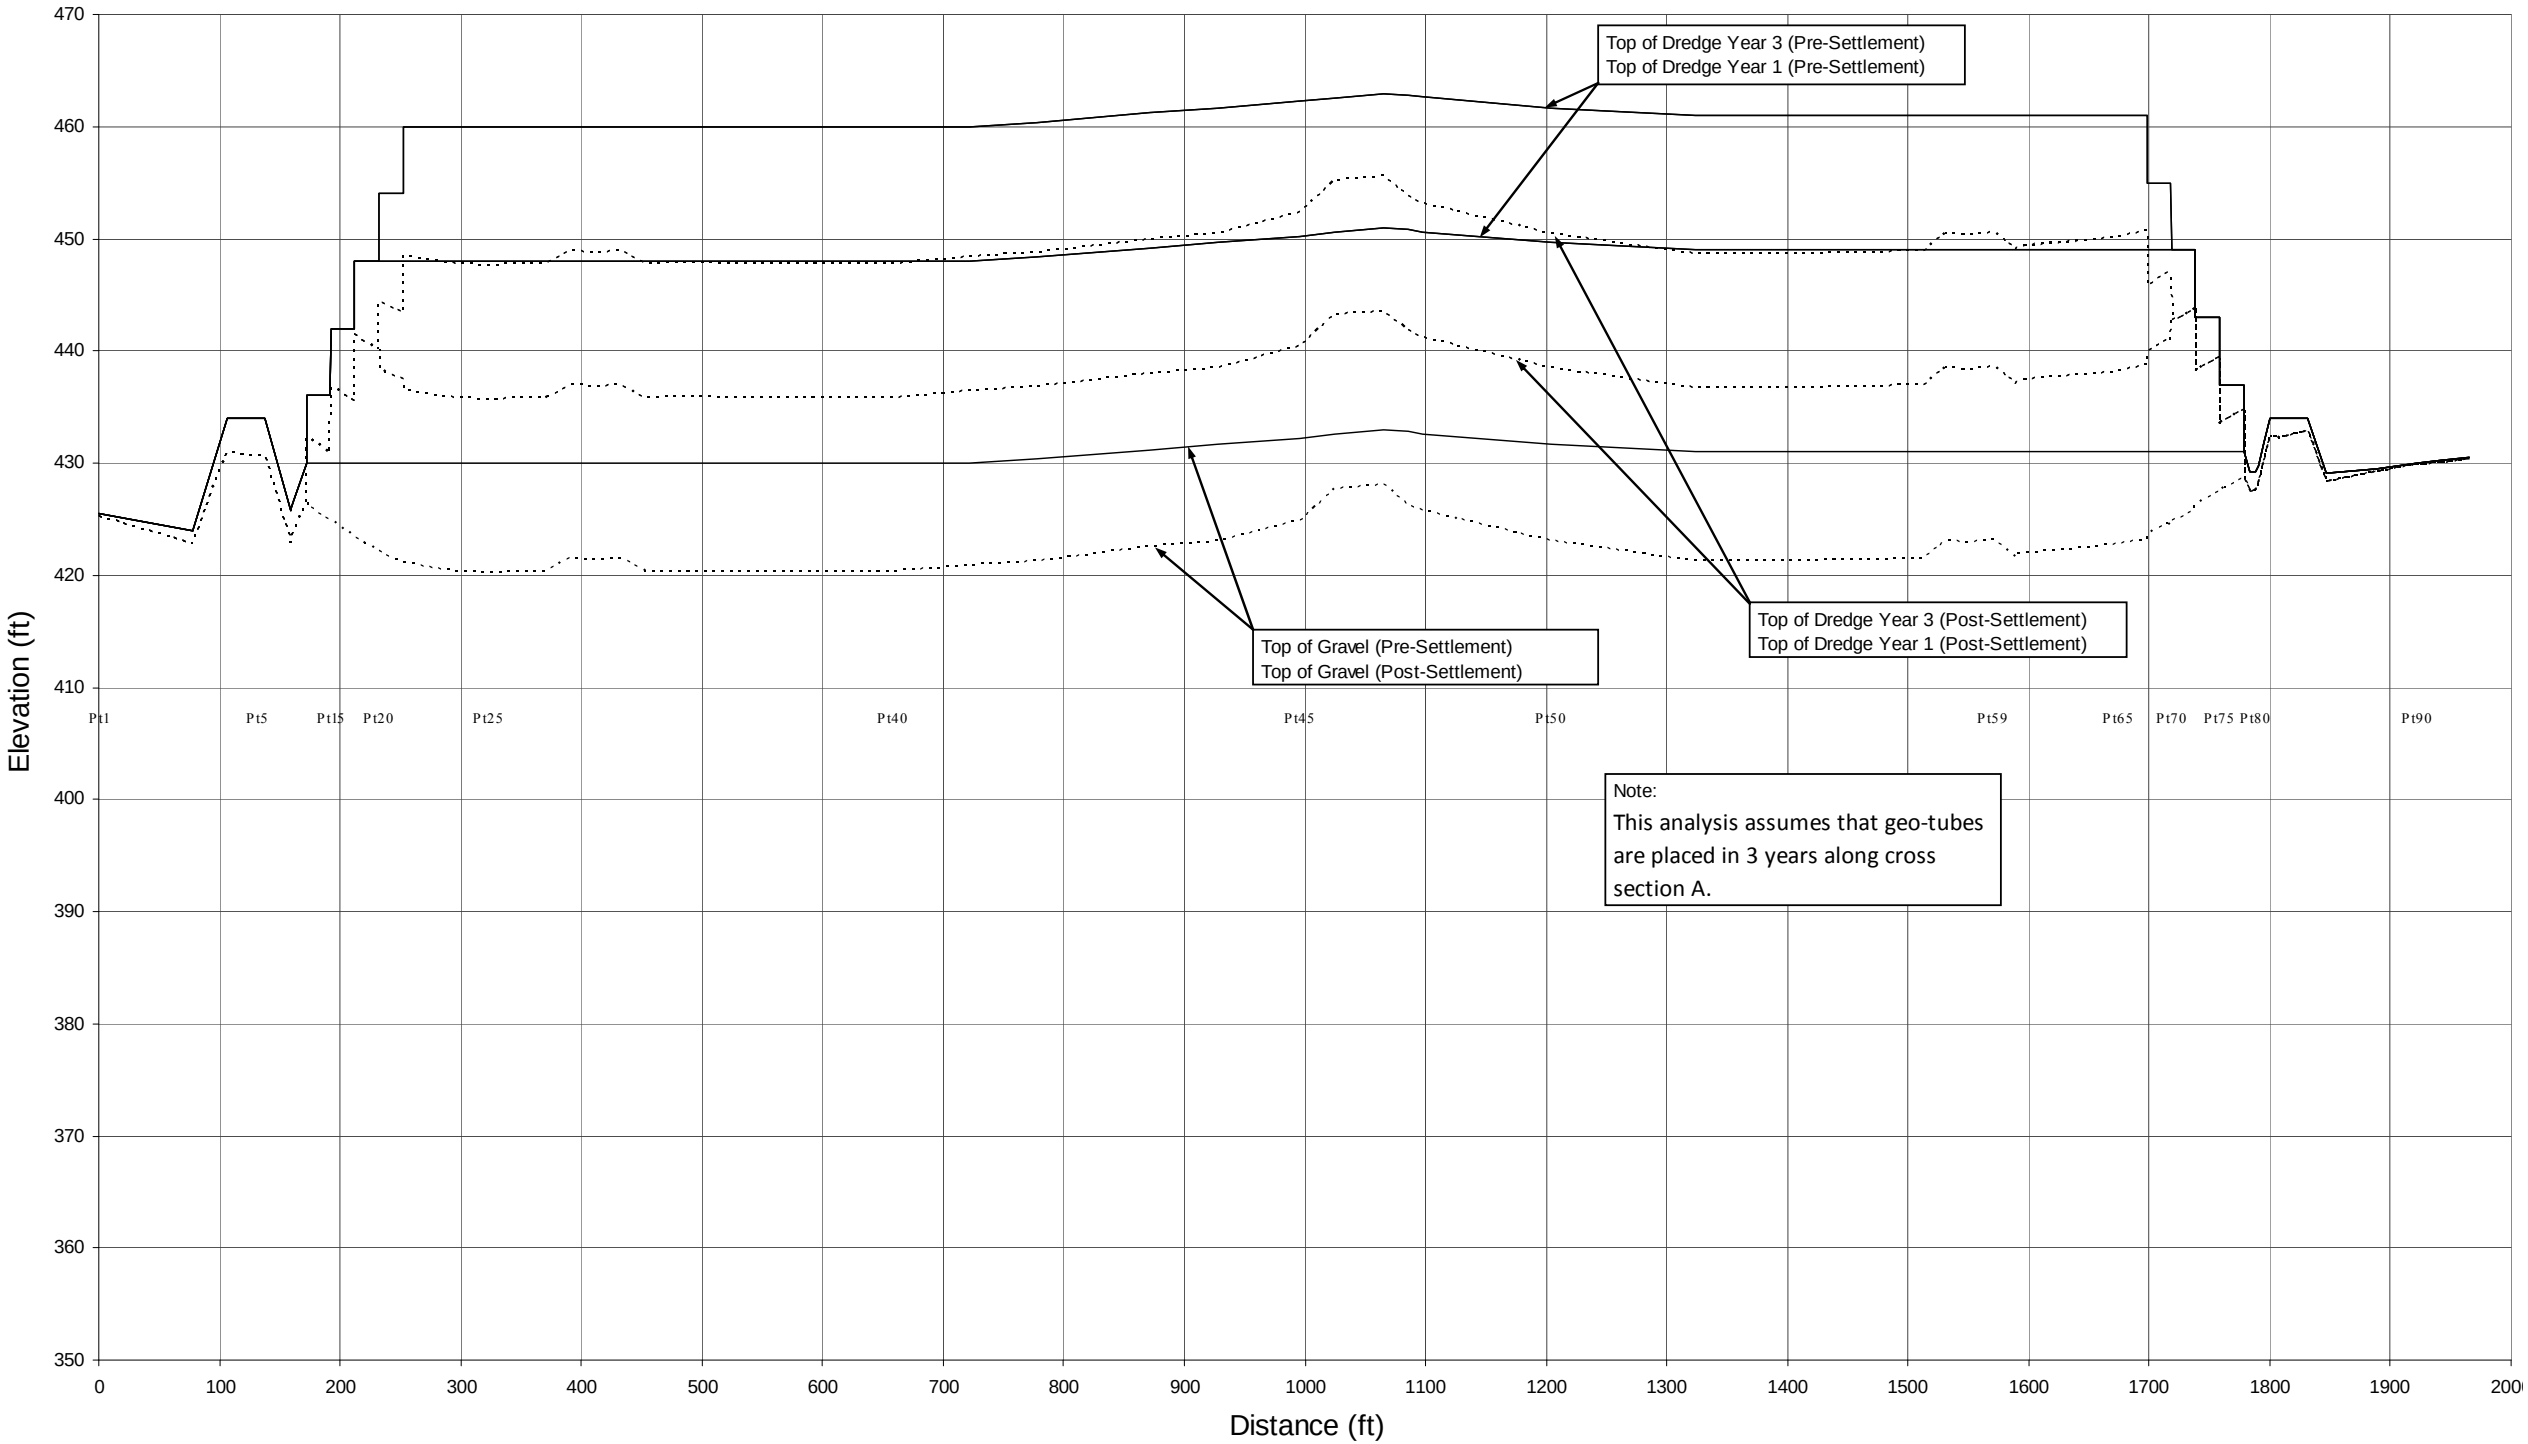


Figure 29. CASE 6: Cover Settlement Analysis Result for Cross Section A

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

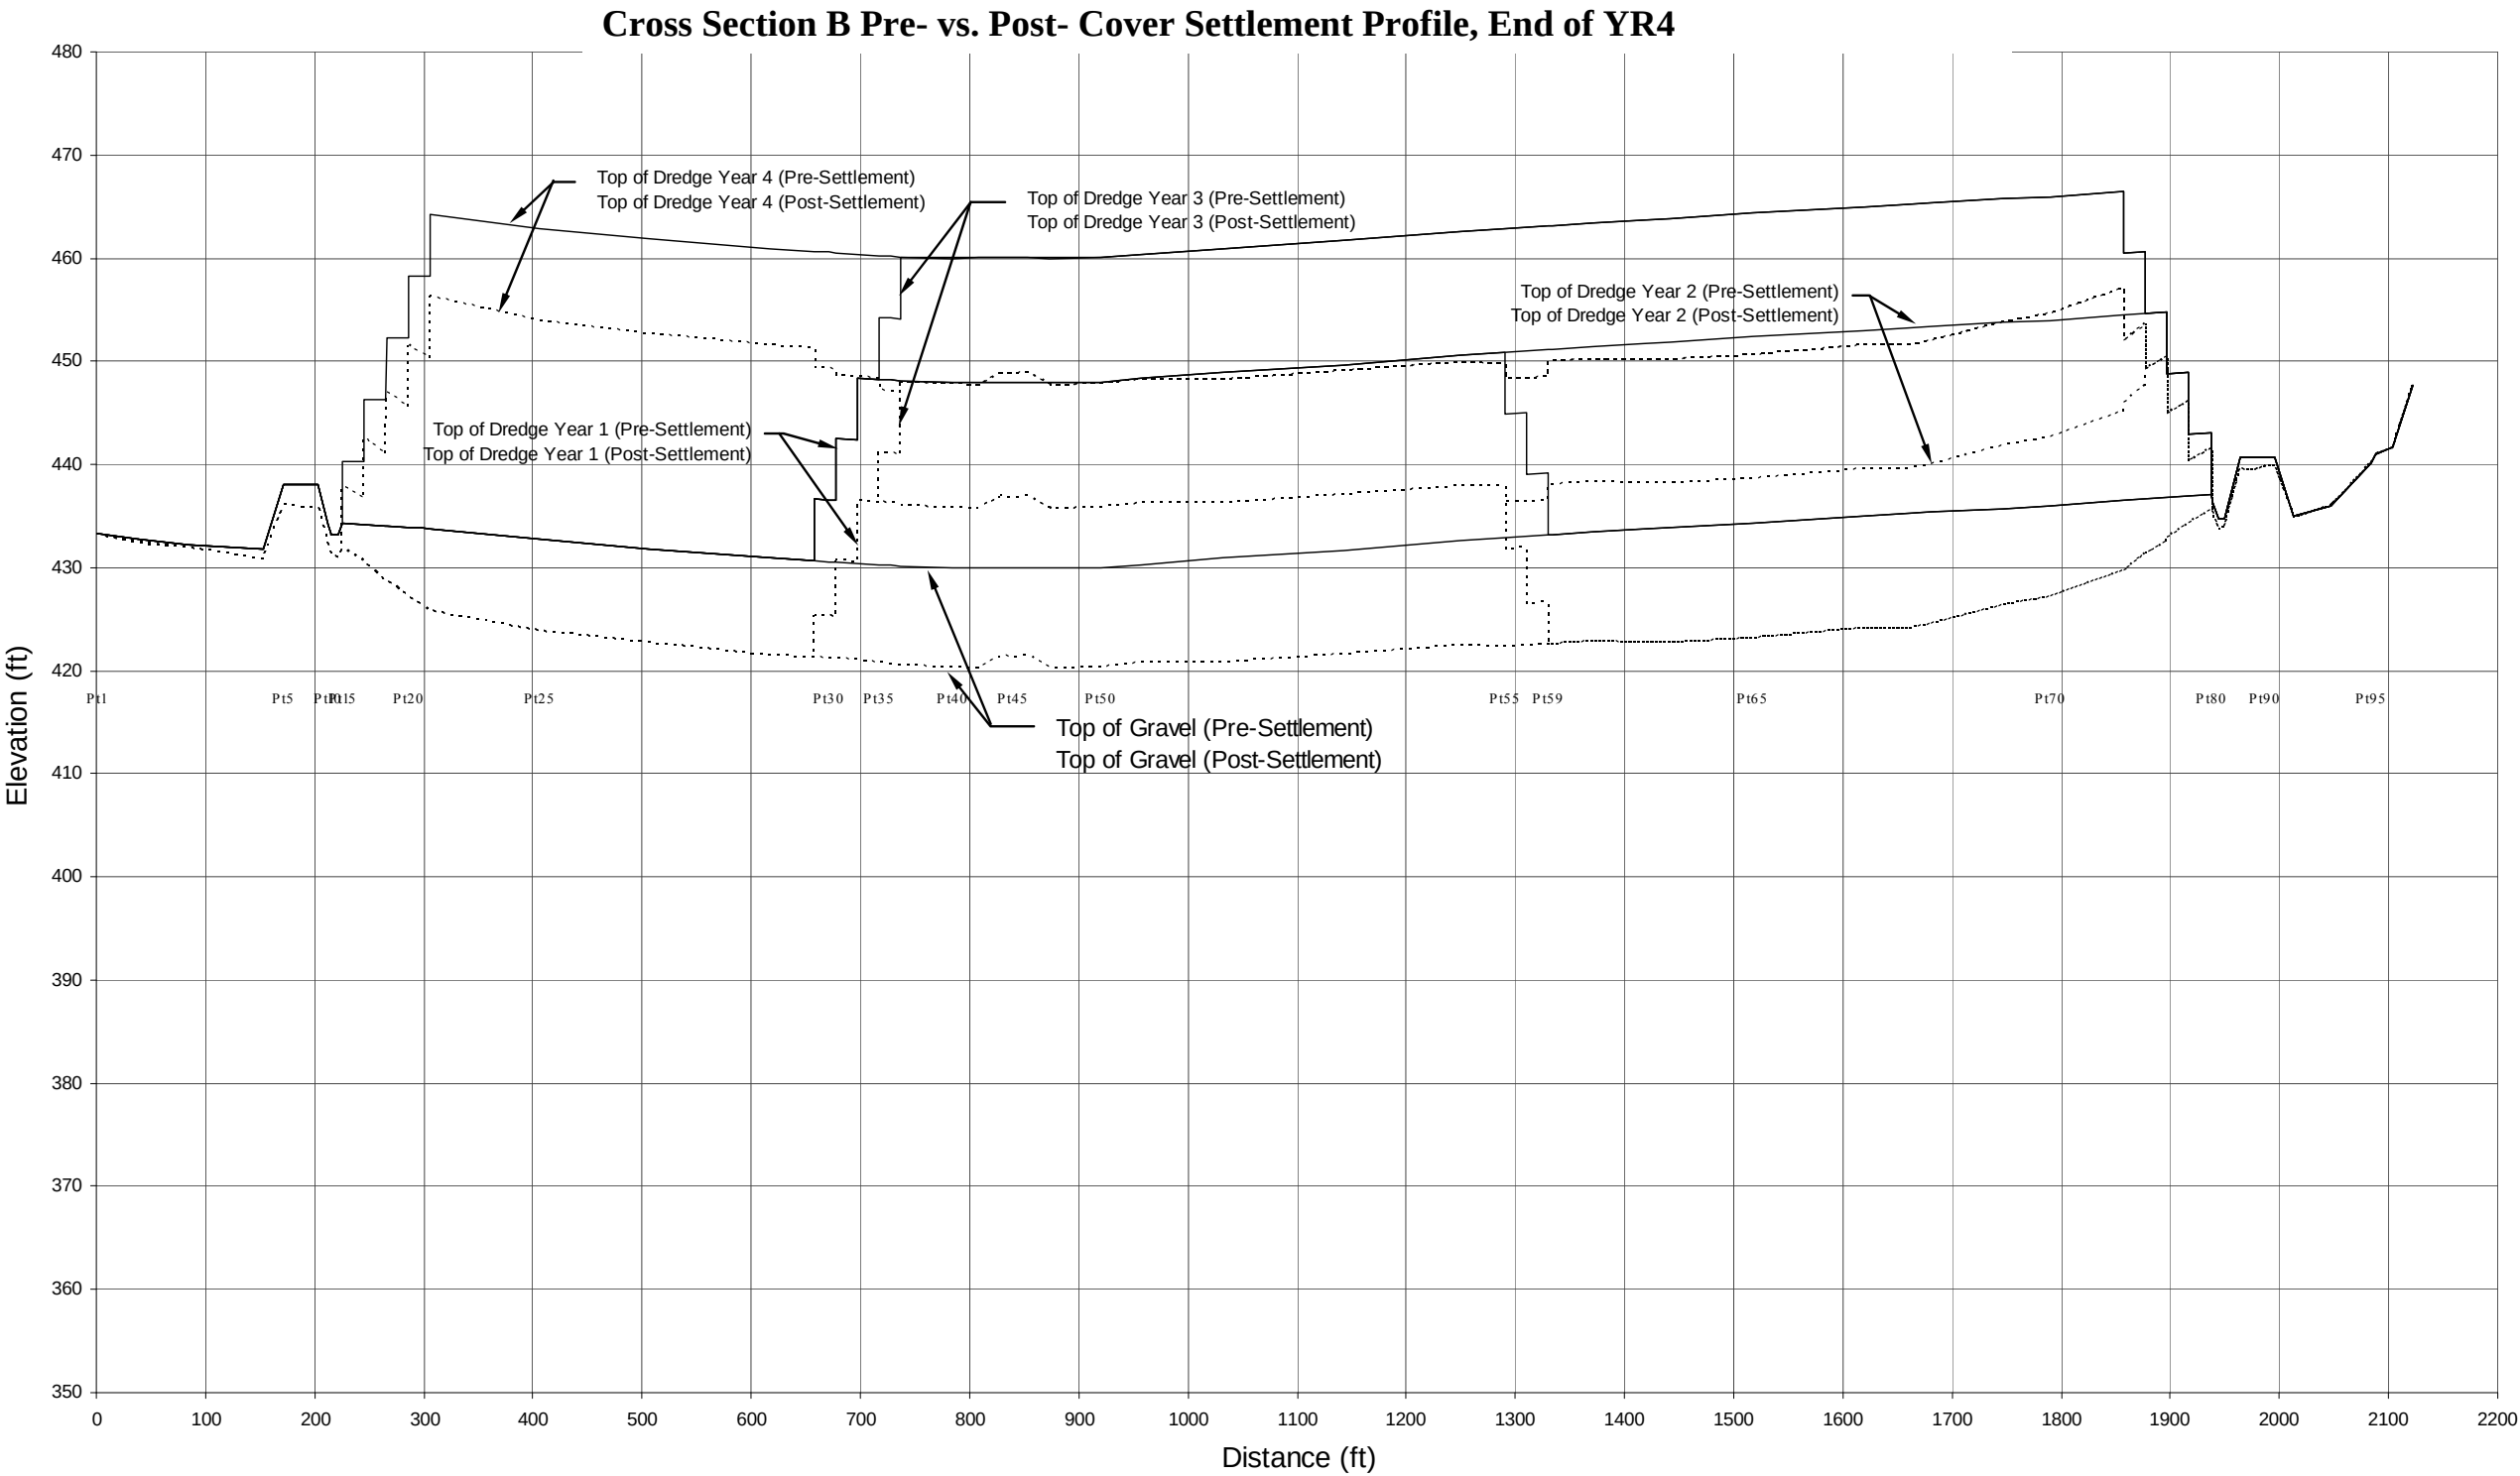


Figure 30. CASE 6: Cover Settlement Analysis Result for Cross Section B

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

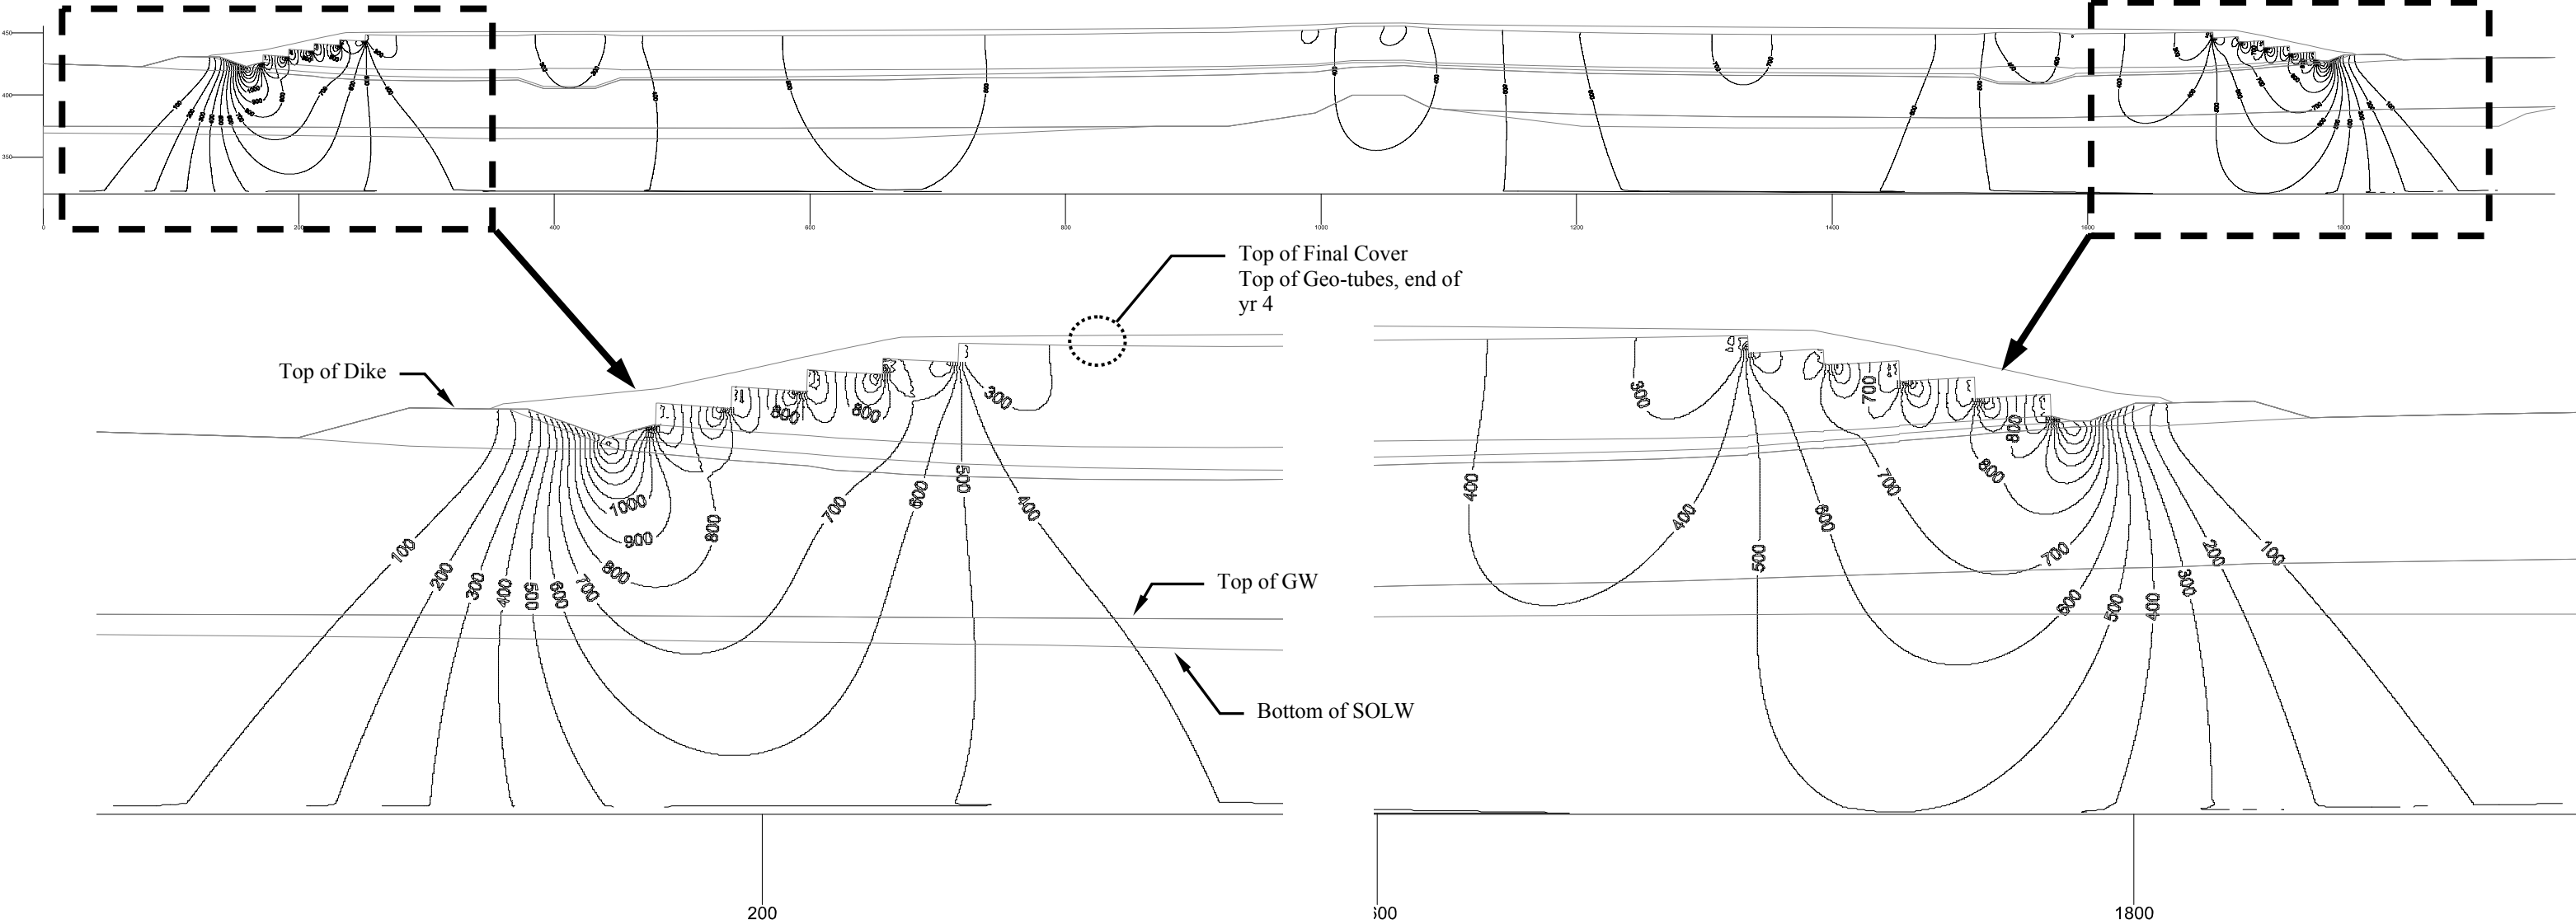


Figure 31. CASE 7: Stress Distribution of Proposed Final Cover Loading along Cross Section A (units in psf)

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: Honeywell Project: Onondaga Lake SCA Final Design Project/ Proposal No.: GJ4299 Task No.: 04

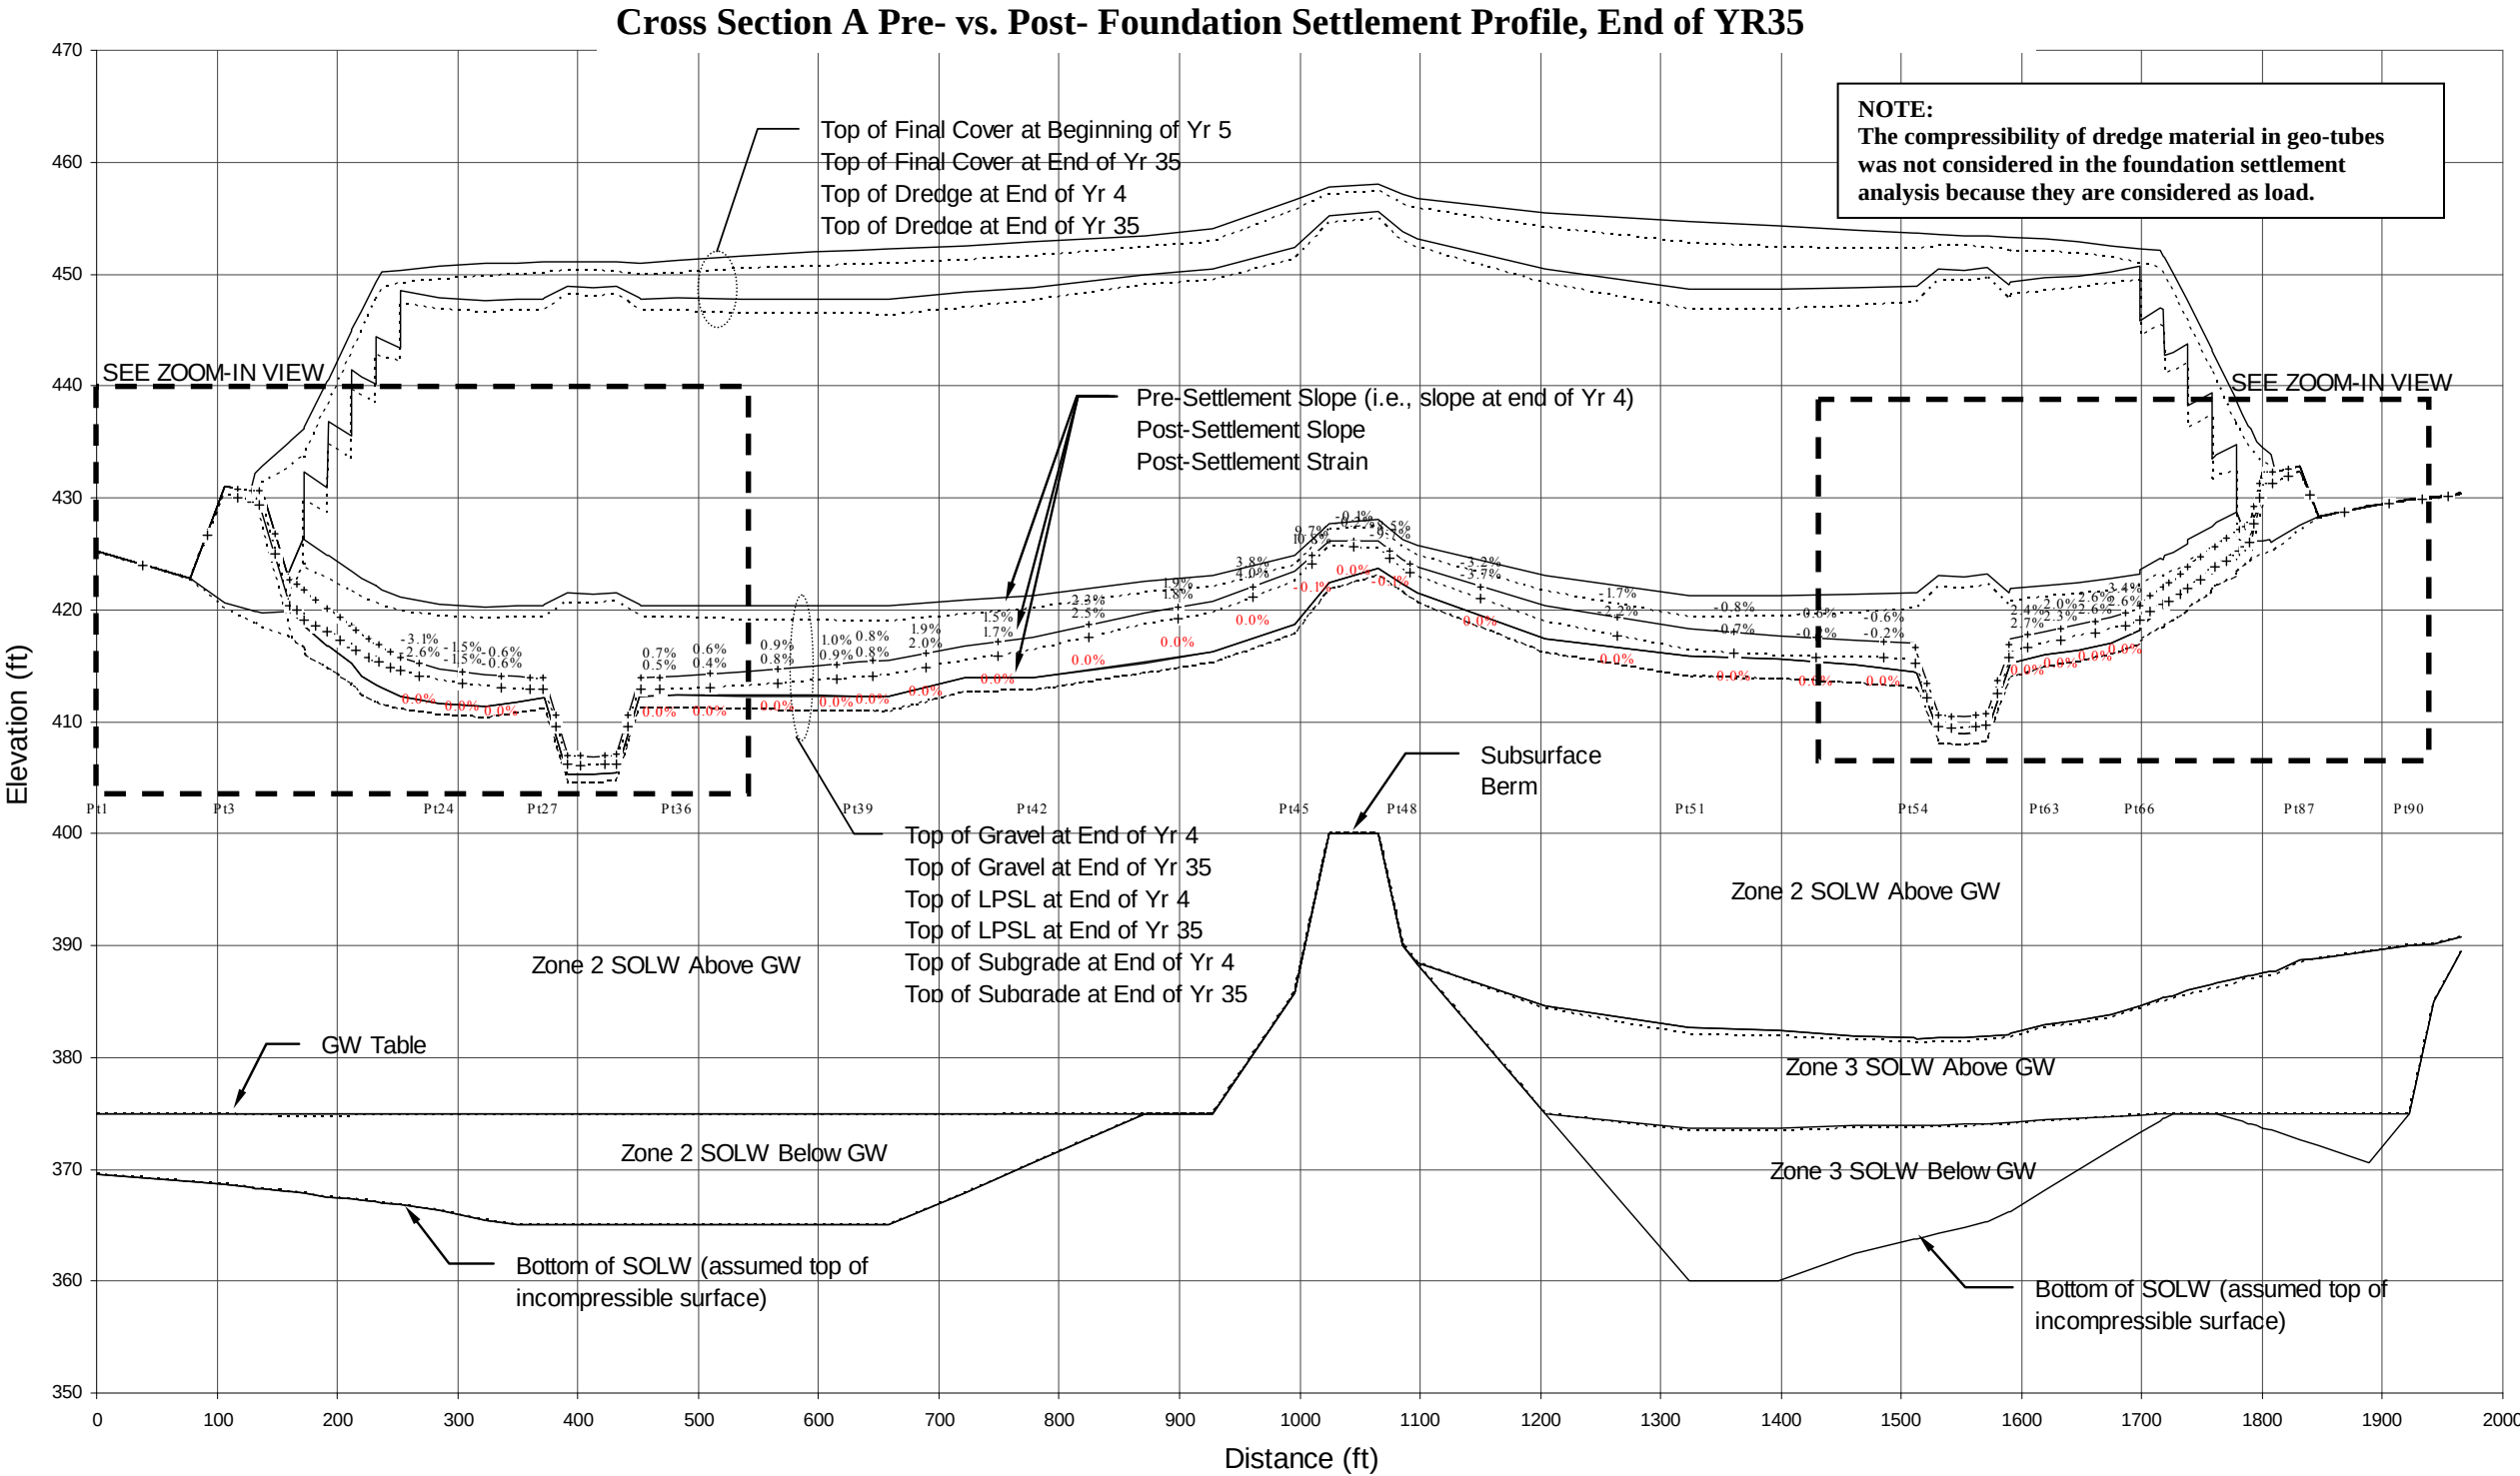


Figure 32. CASE 7: Foundation Settlement Analysis Result for Cross Section A (Overall View)

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: Honeywell Project: Onondaga Lake SCA Final Design Project/ Proposal No.: GJ4299 Task No.: 04

Cross Section A Pre- vs. Post- Foundation Settlement Profile, End of YR35

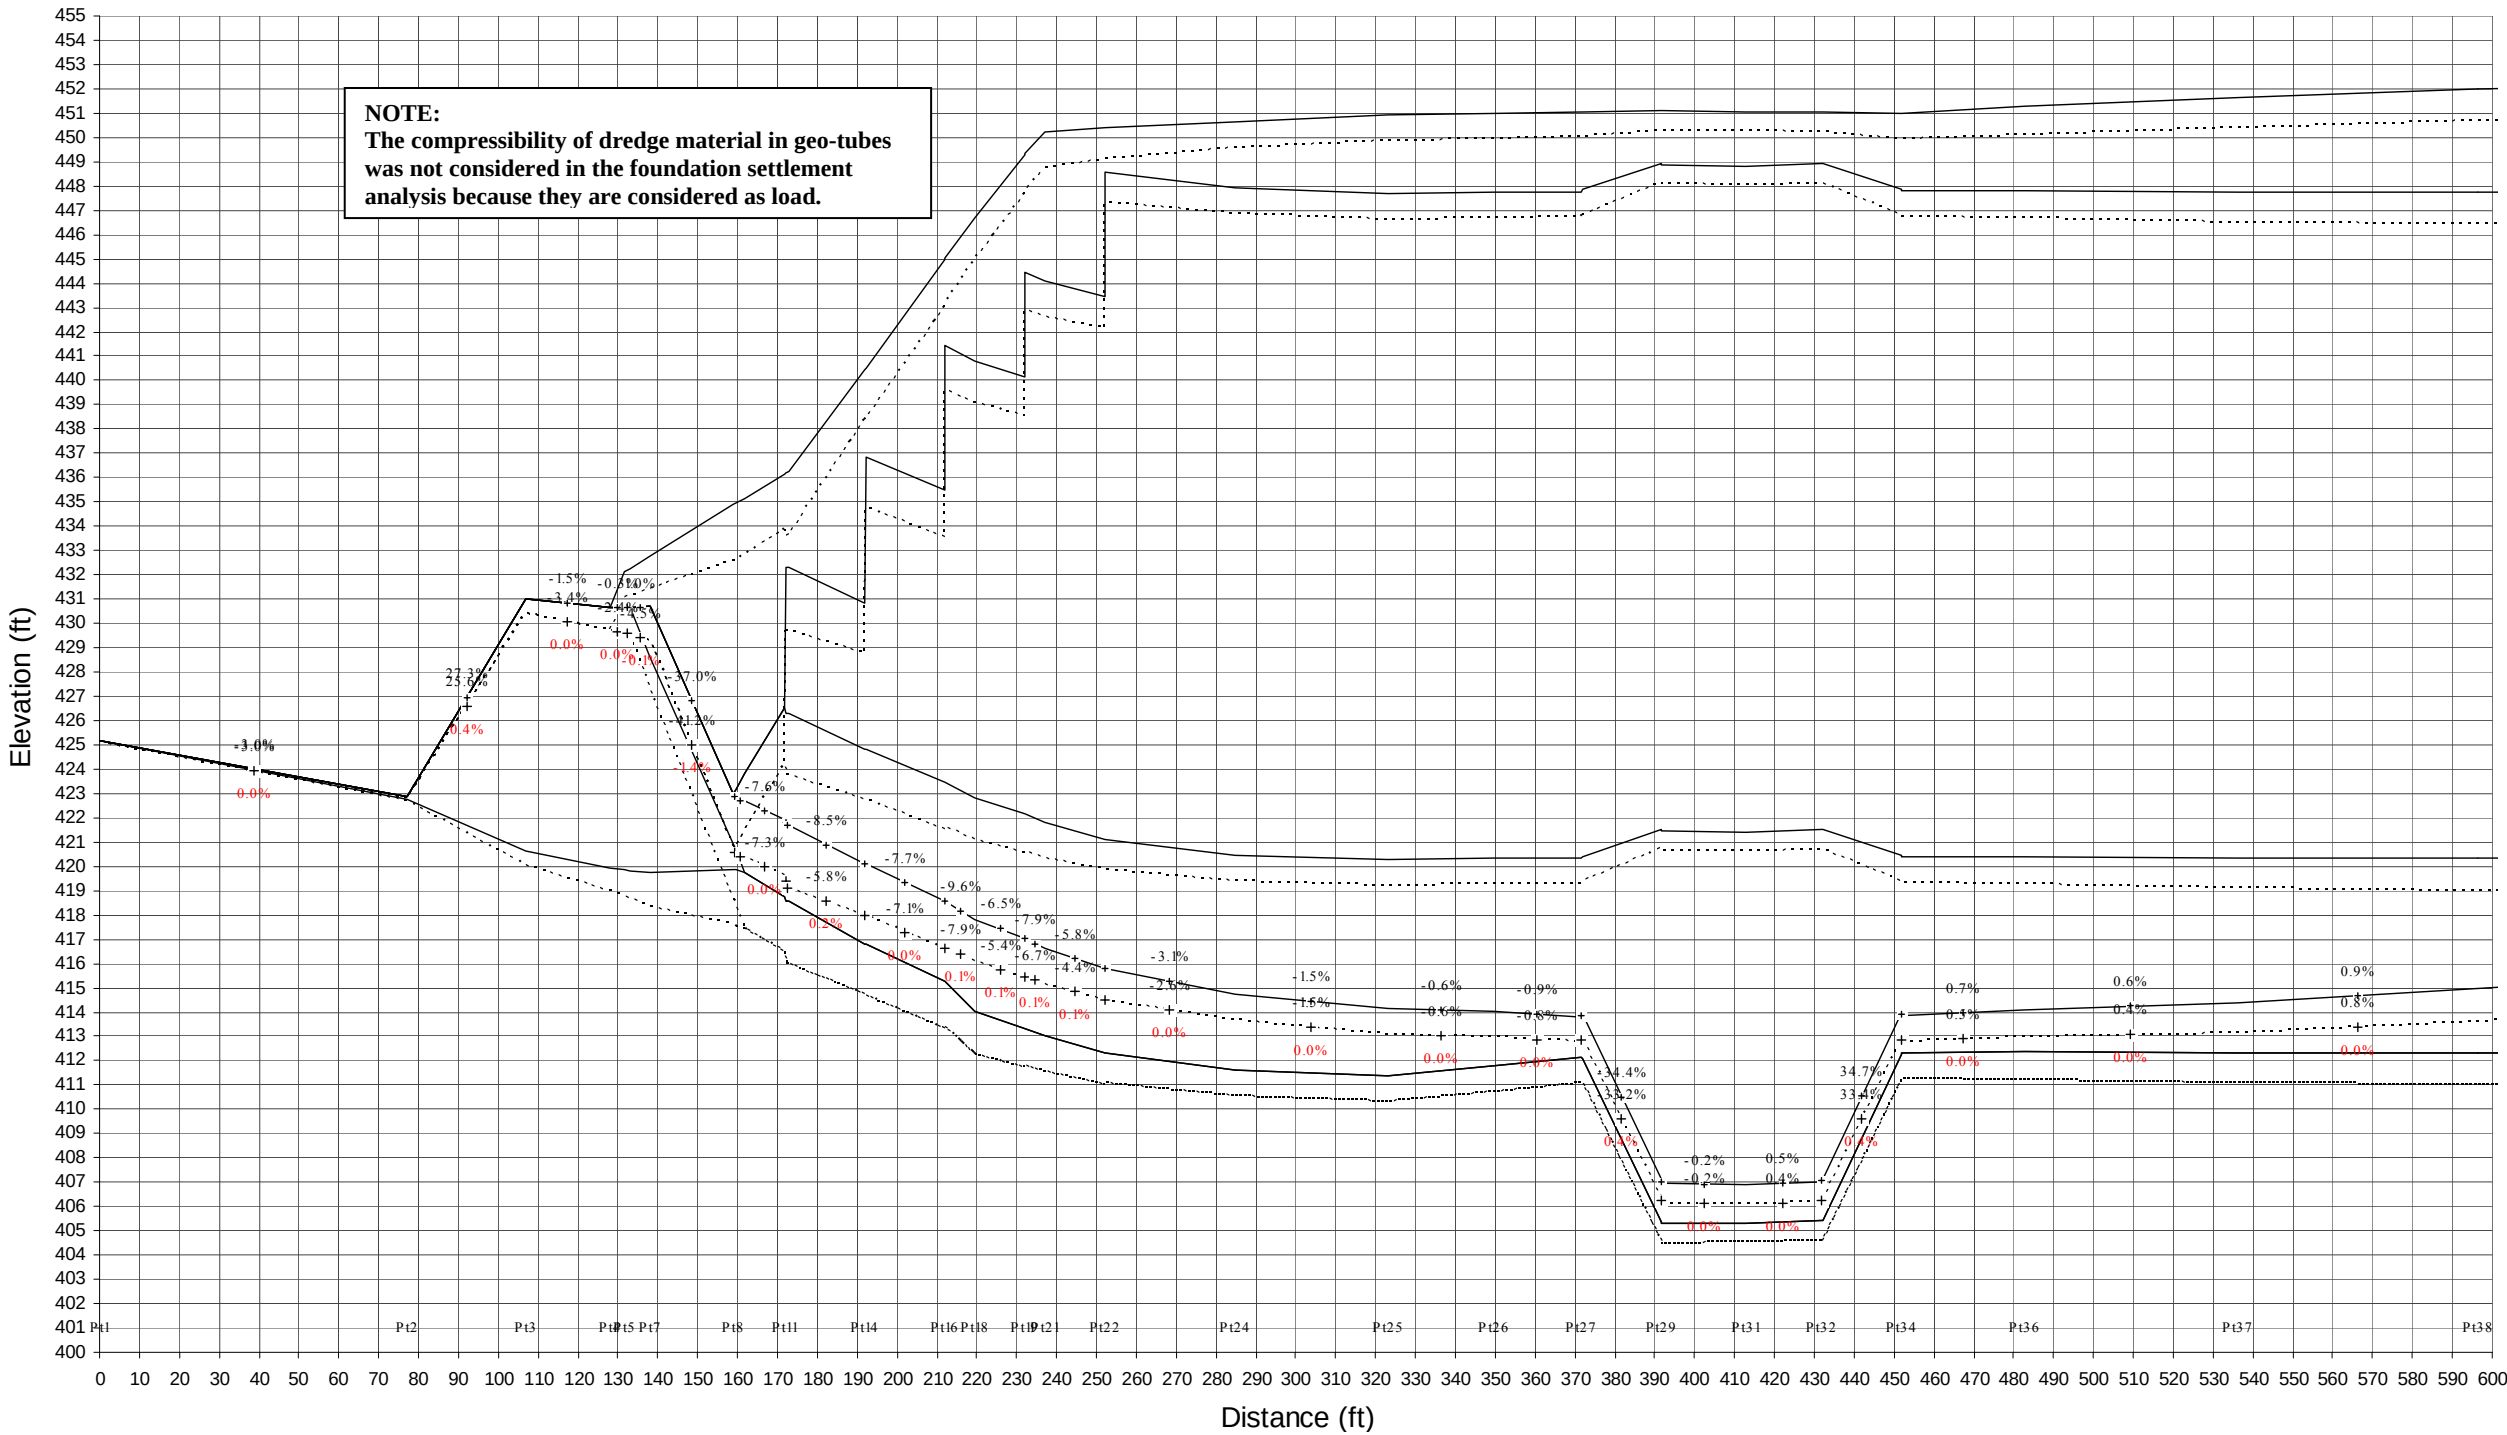


Figure 33. CASE 7: Foundation Settlement Analysis Result for Cross Section A (Left Berm and Sump)

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: Honeywell Project: Onondaga Lake SCA Final Design Project/ Proposal No.: GJ4299 Task No.: 04

Cross Section A Pre- vs. Post- Foundation Settlement Profile, End of YR35

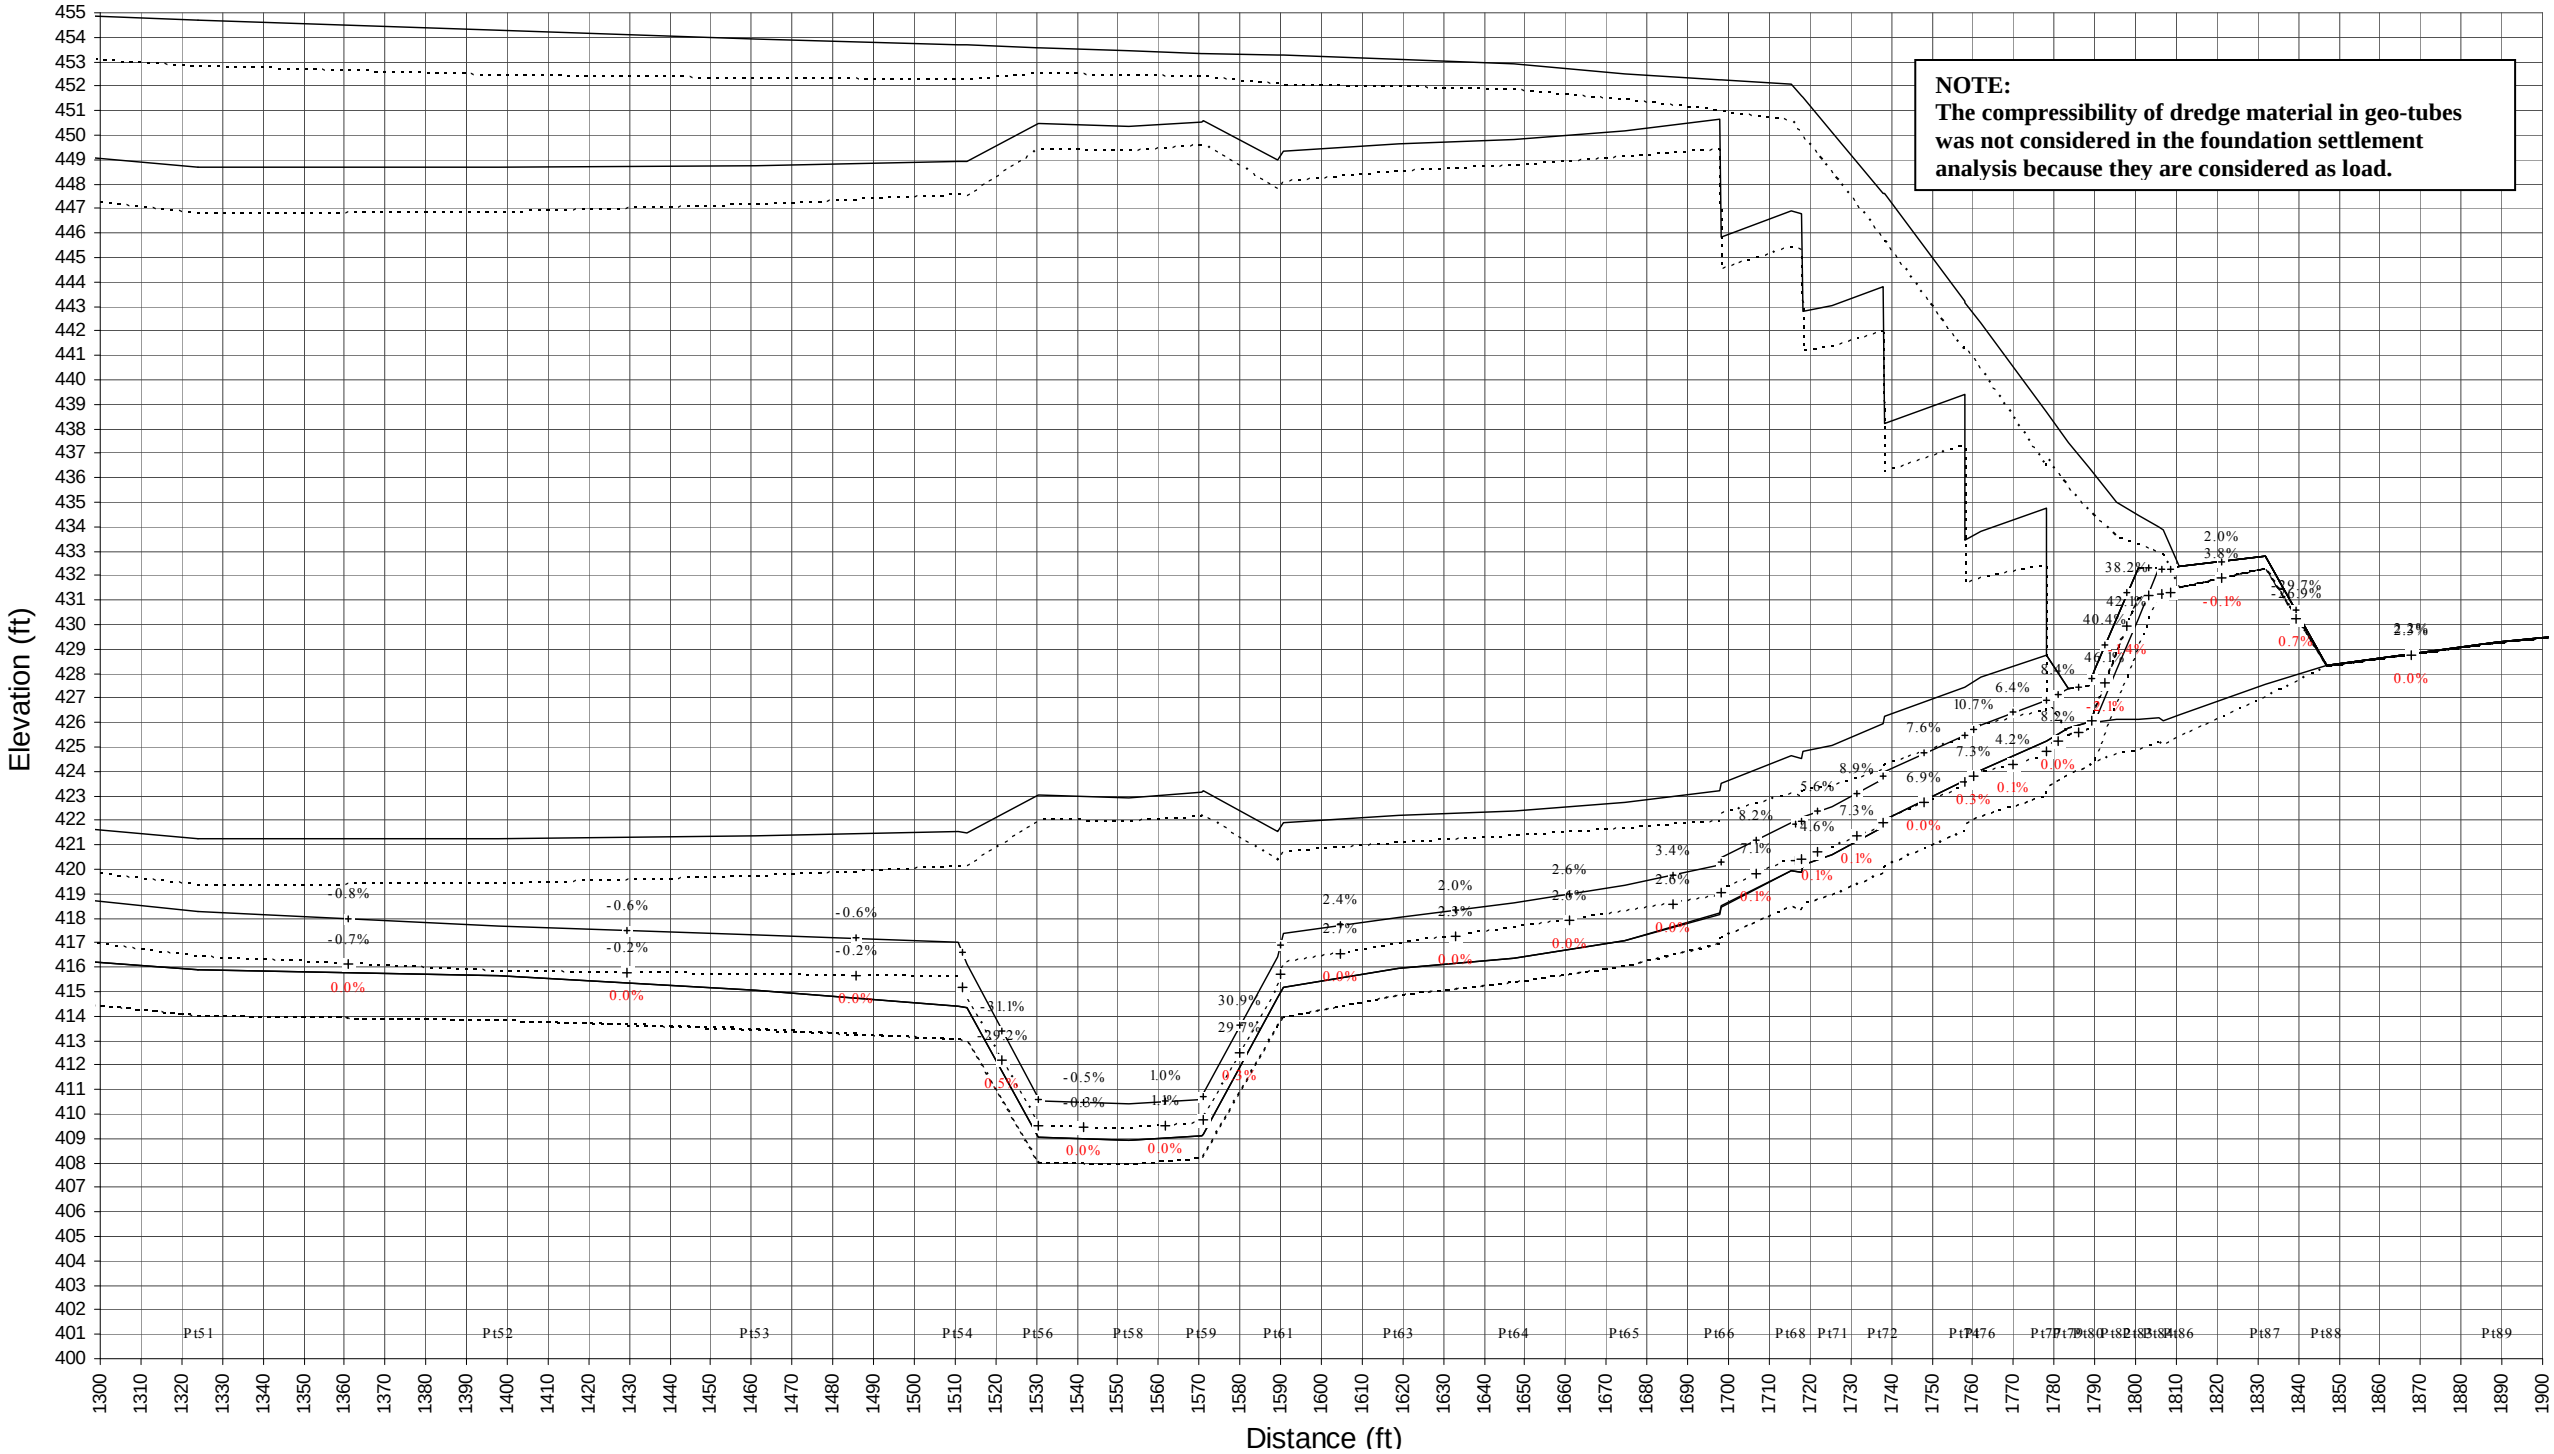


Figure 34. CASE 7: Foundation Settlement Analysis Result for Cross Section A (Right Berm and Sump)

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

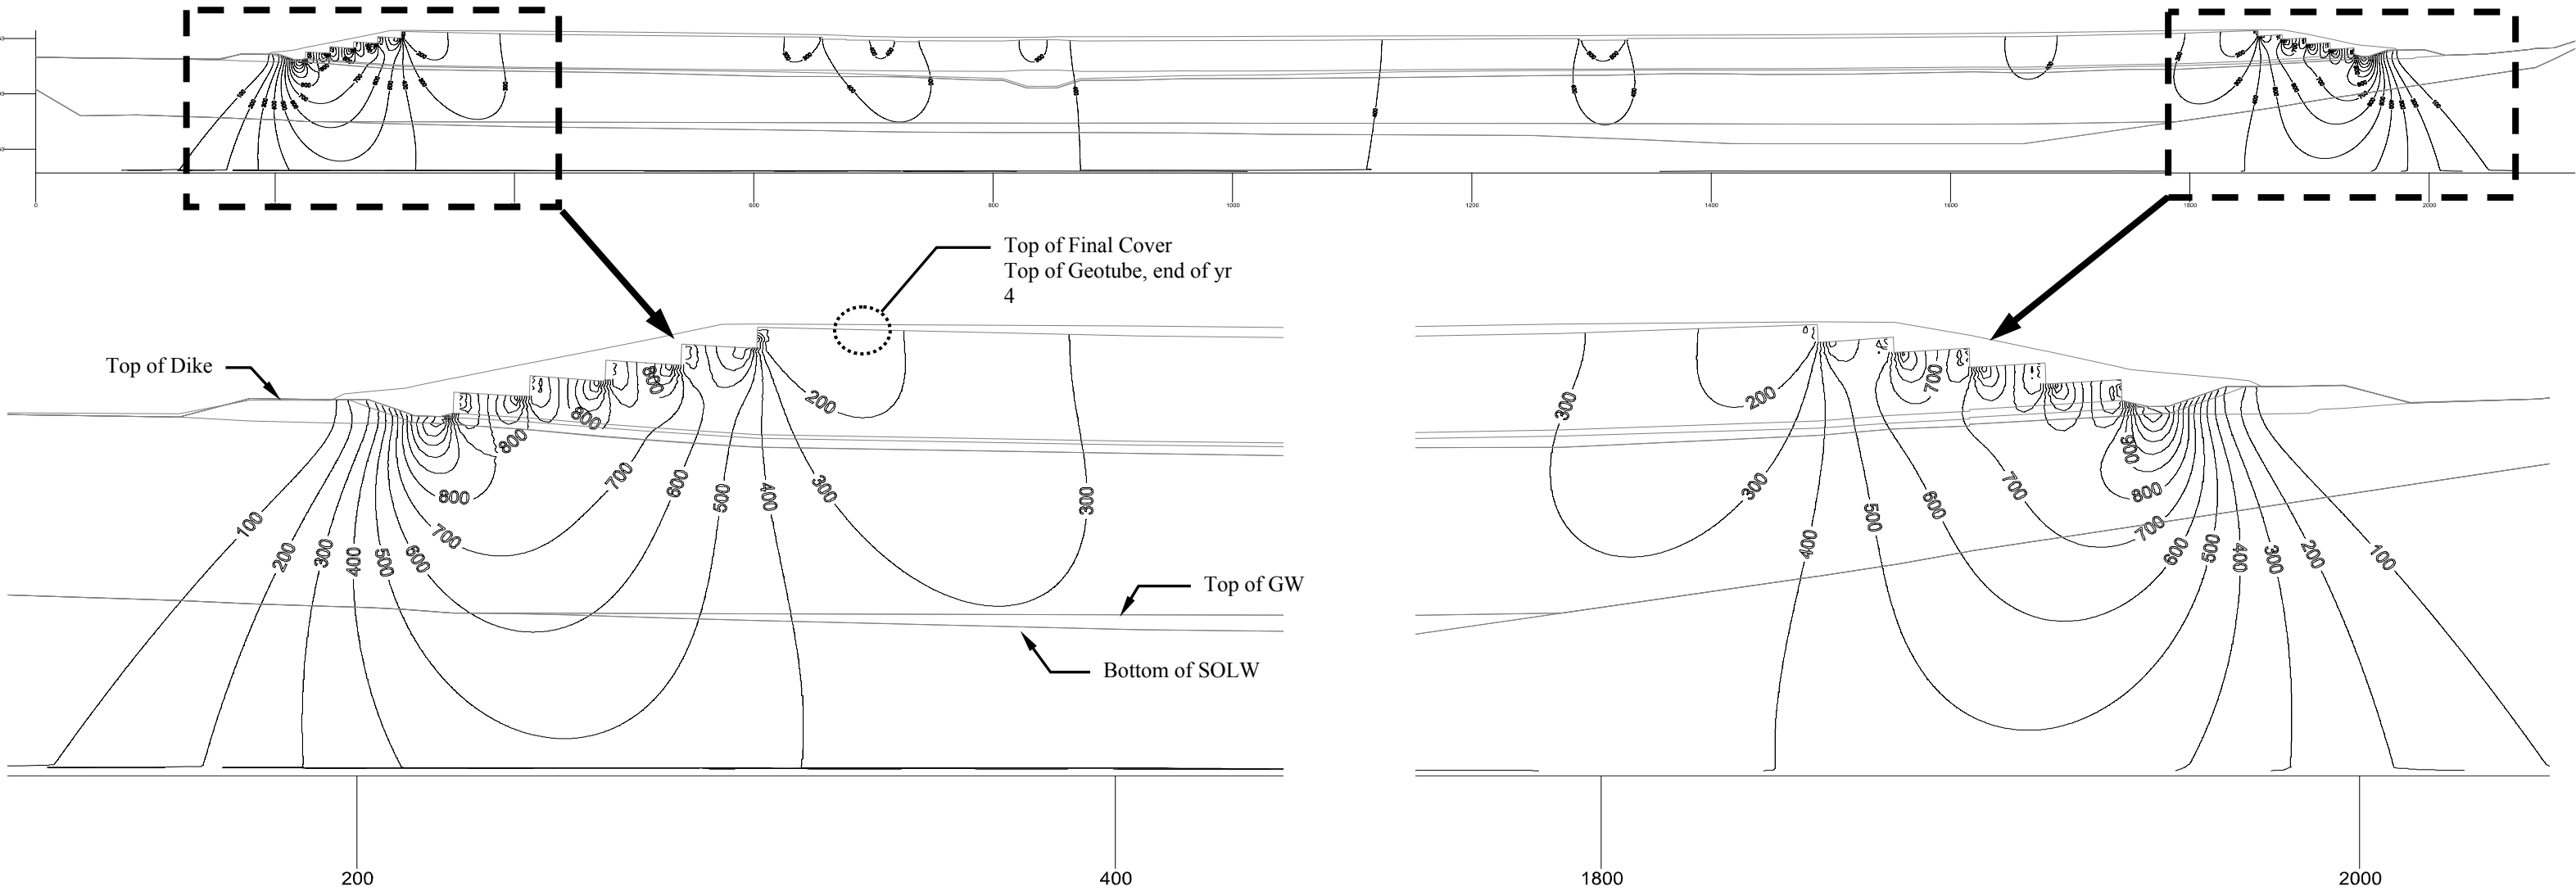


Figure 35. CASE 7: Stress Distribution of Proposed Final Cover Loading along Cross Section B (units in psf)

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: Honeywell Project: Onondaga Lake SCA Final Design Project/ Proposal No.: GJ4299 Task No.: 04

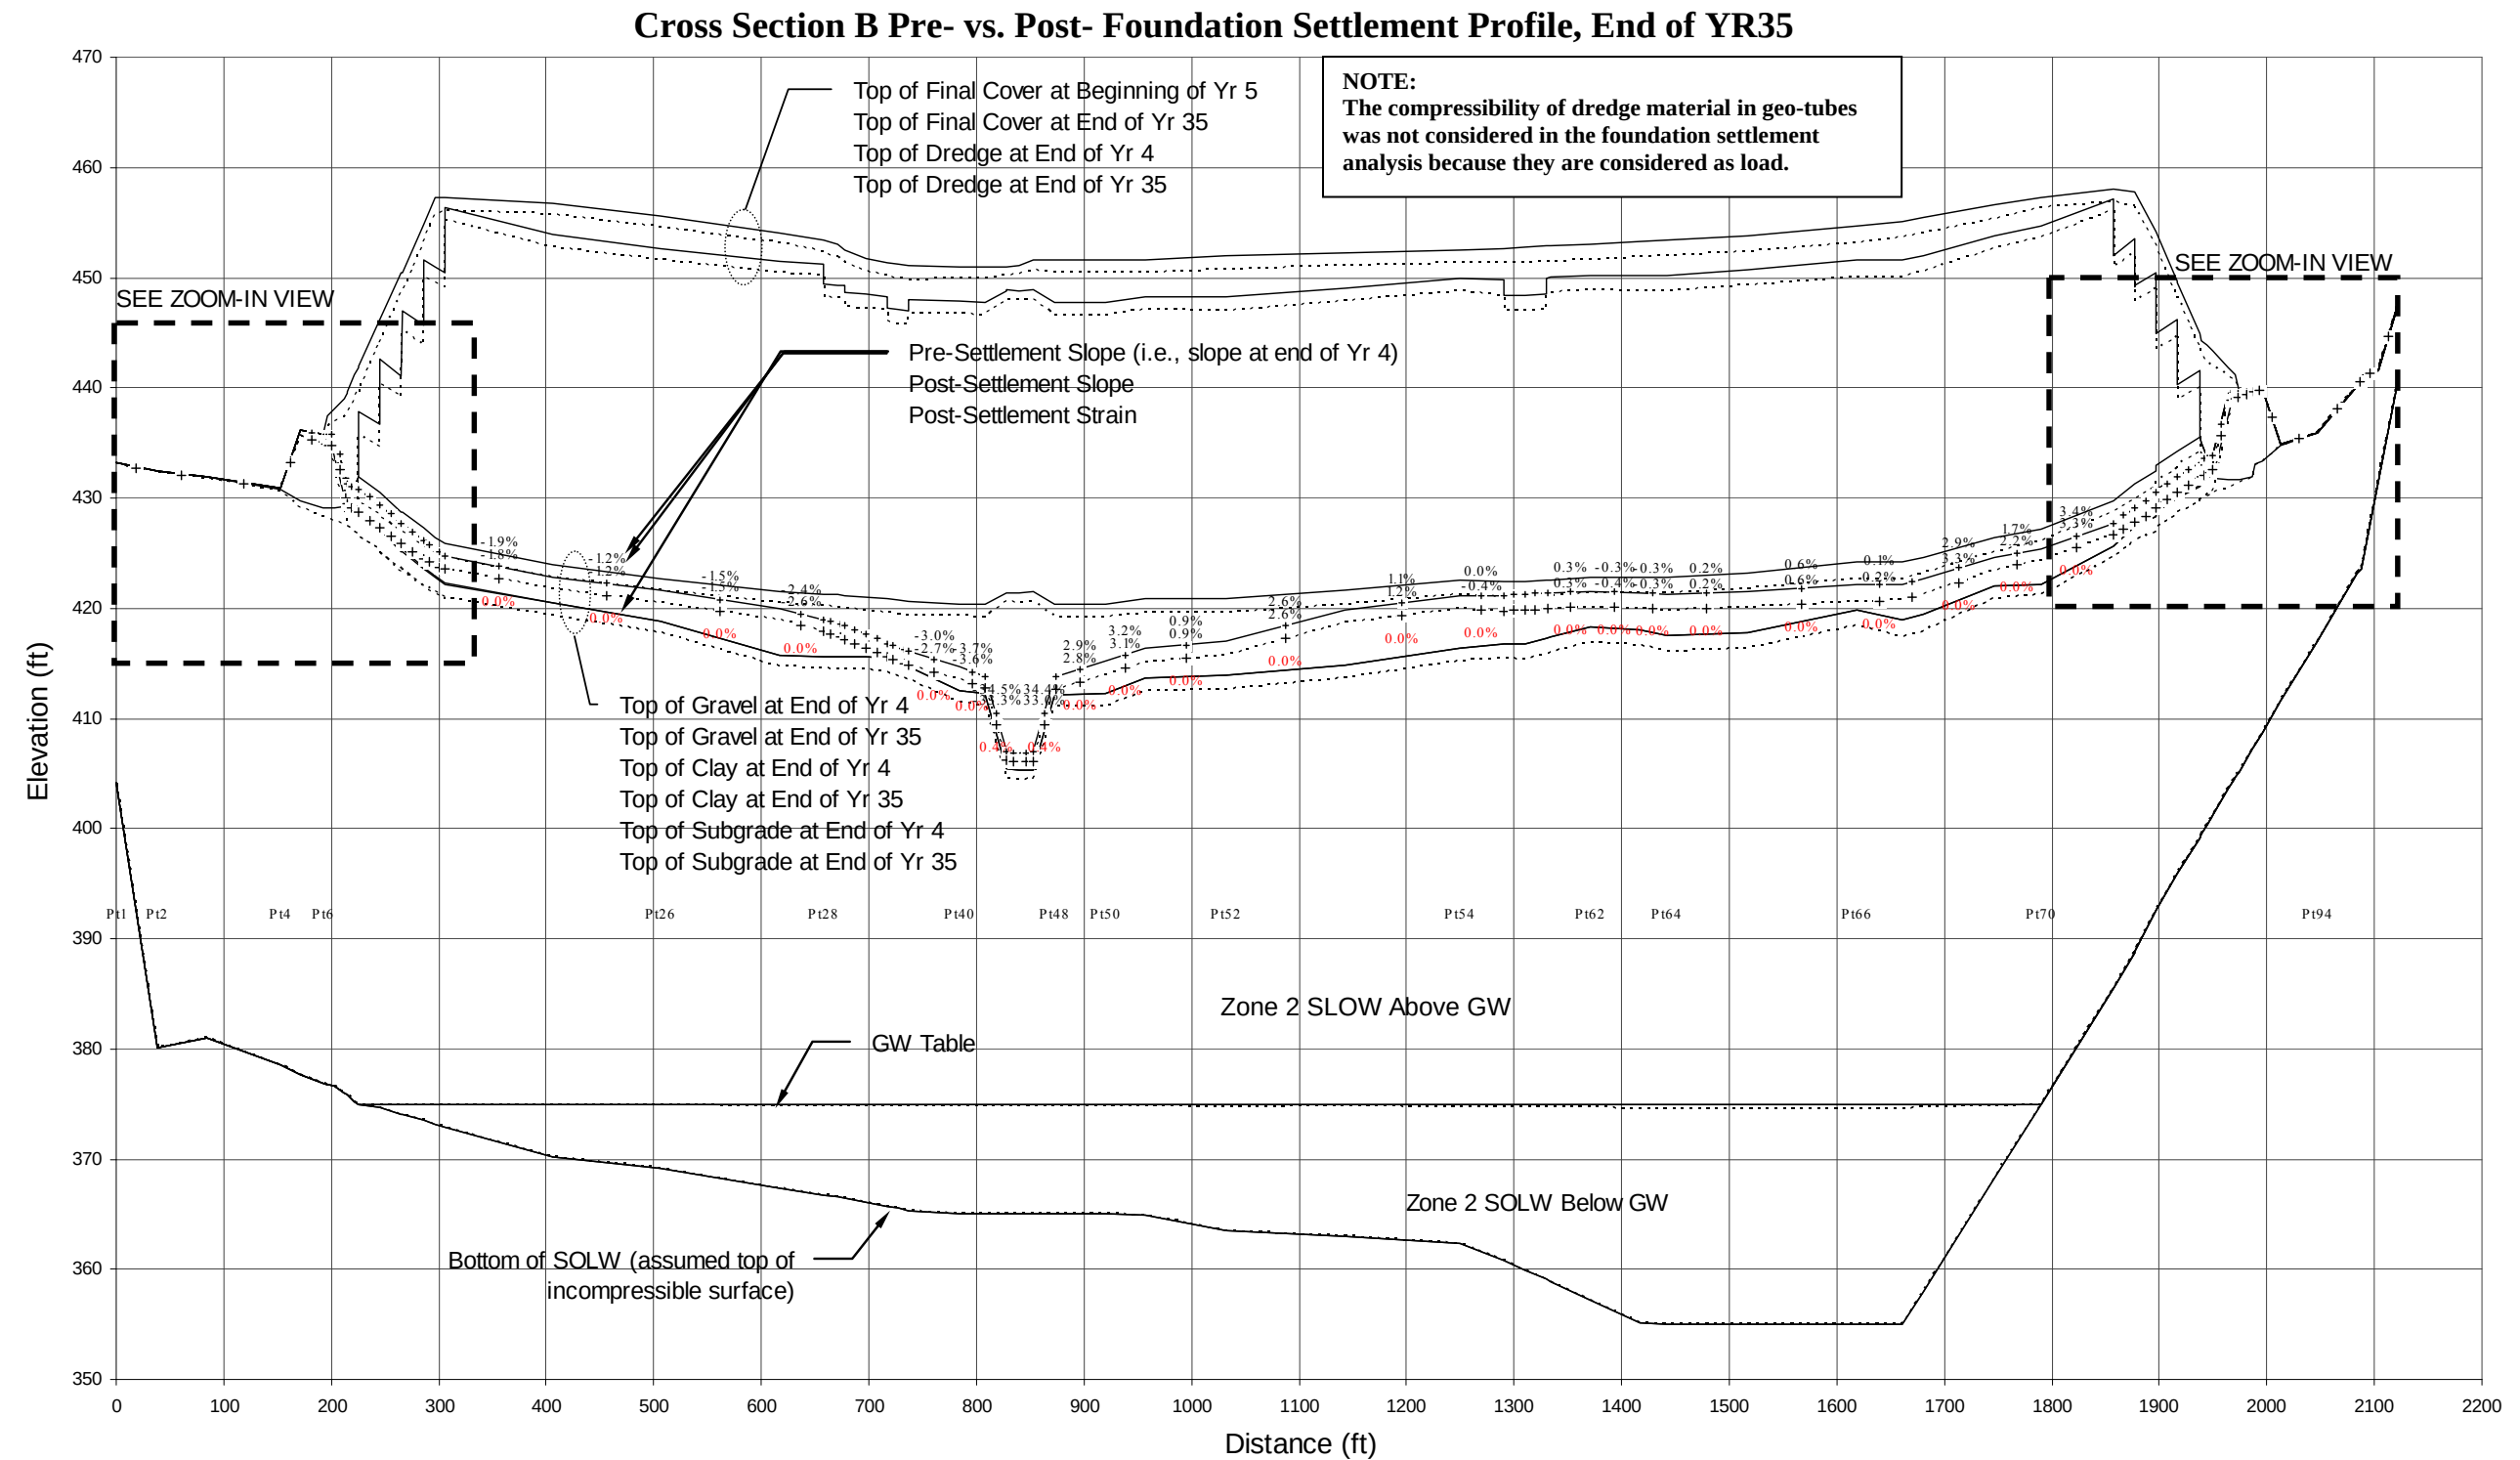


Figure 36. CASE 7: Foundation Settlement Analysis Result for Cross Section B (Overall View)

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: Honeywell Project: Onondaga Lake SCA Final Design Project/ Proposal No.: GJ4299 Task No.: 04

Cross Section B Pre- vs. Post- Foundation Settlement Profile, End of YR35

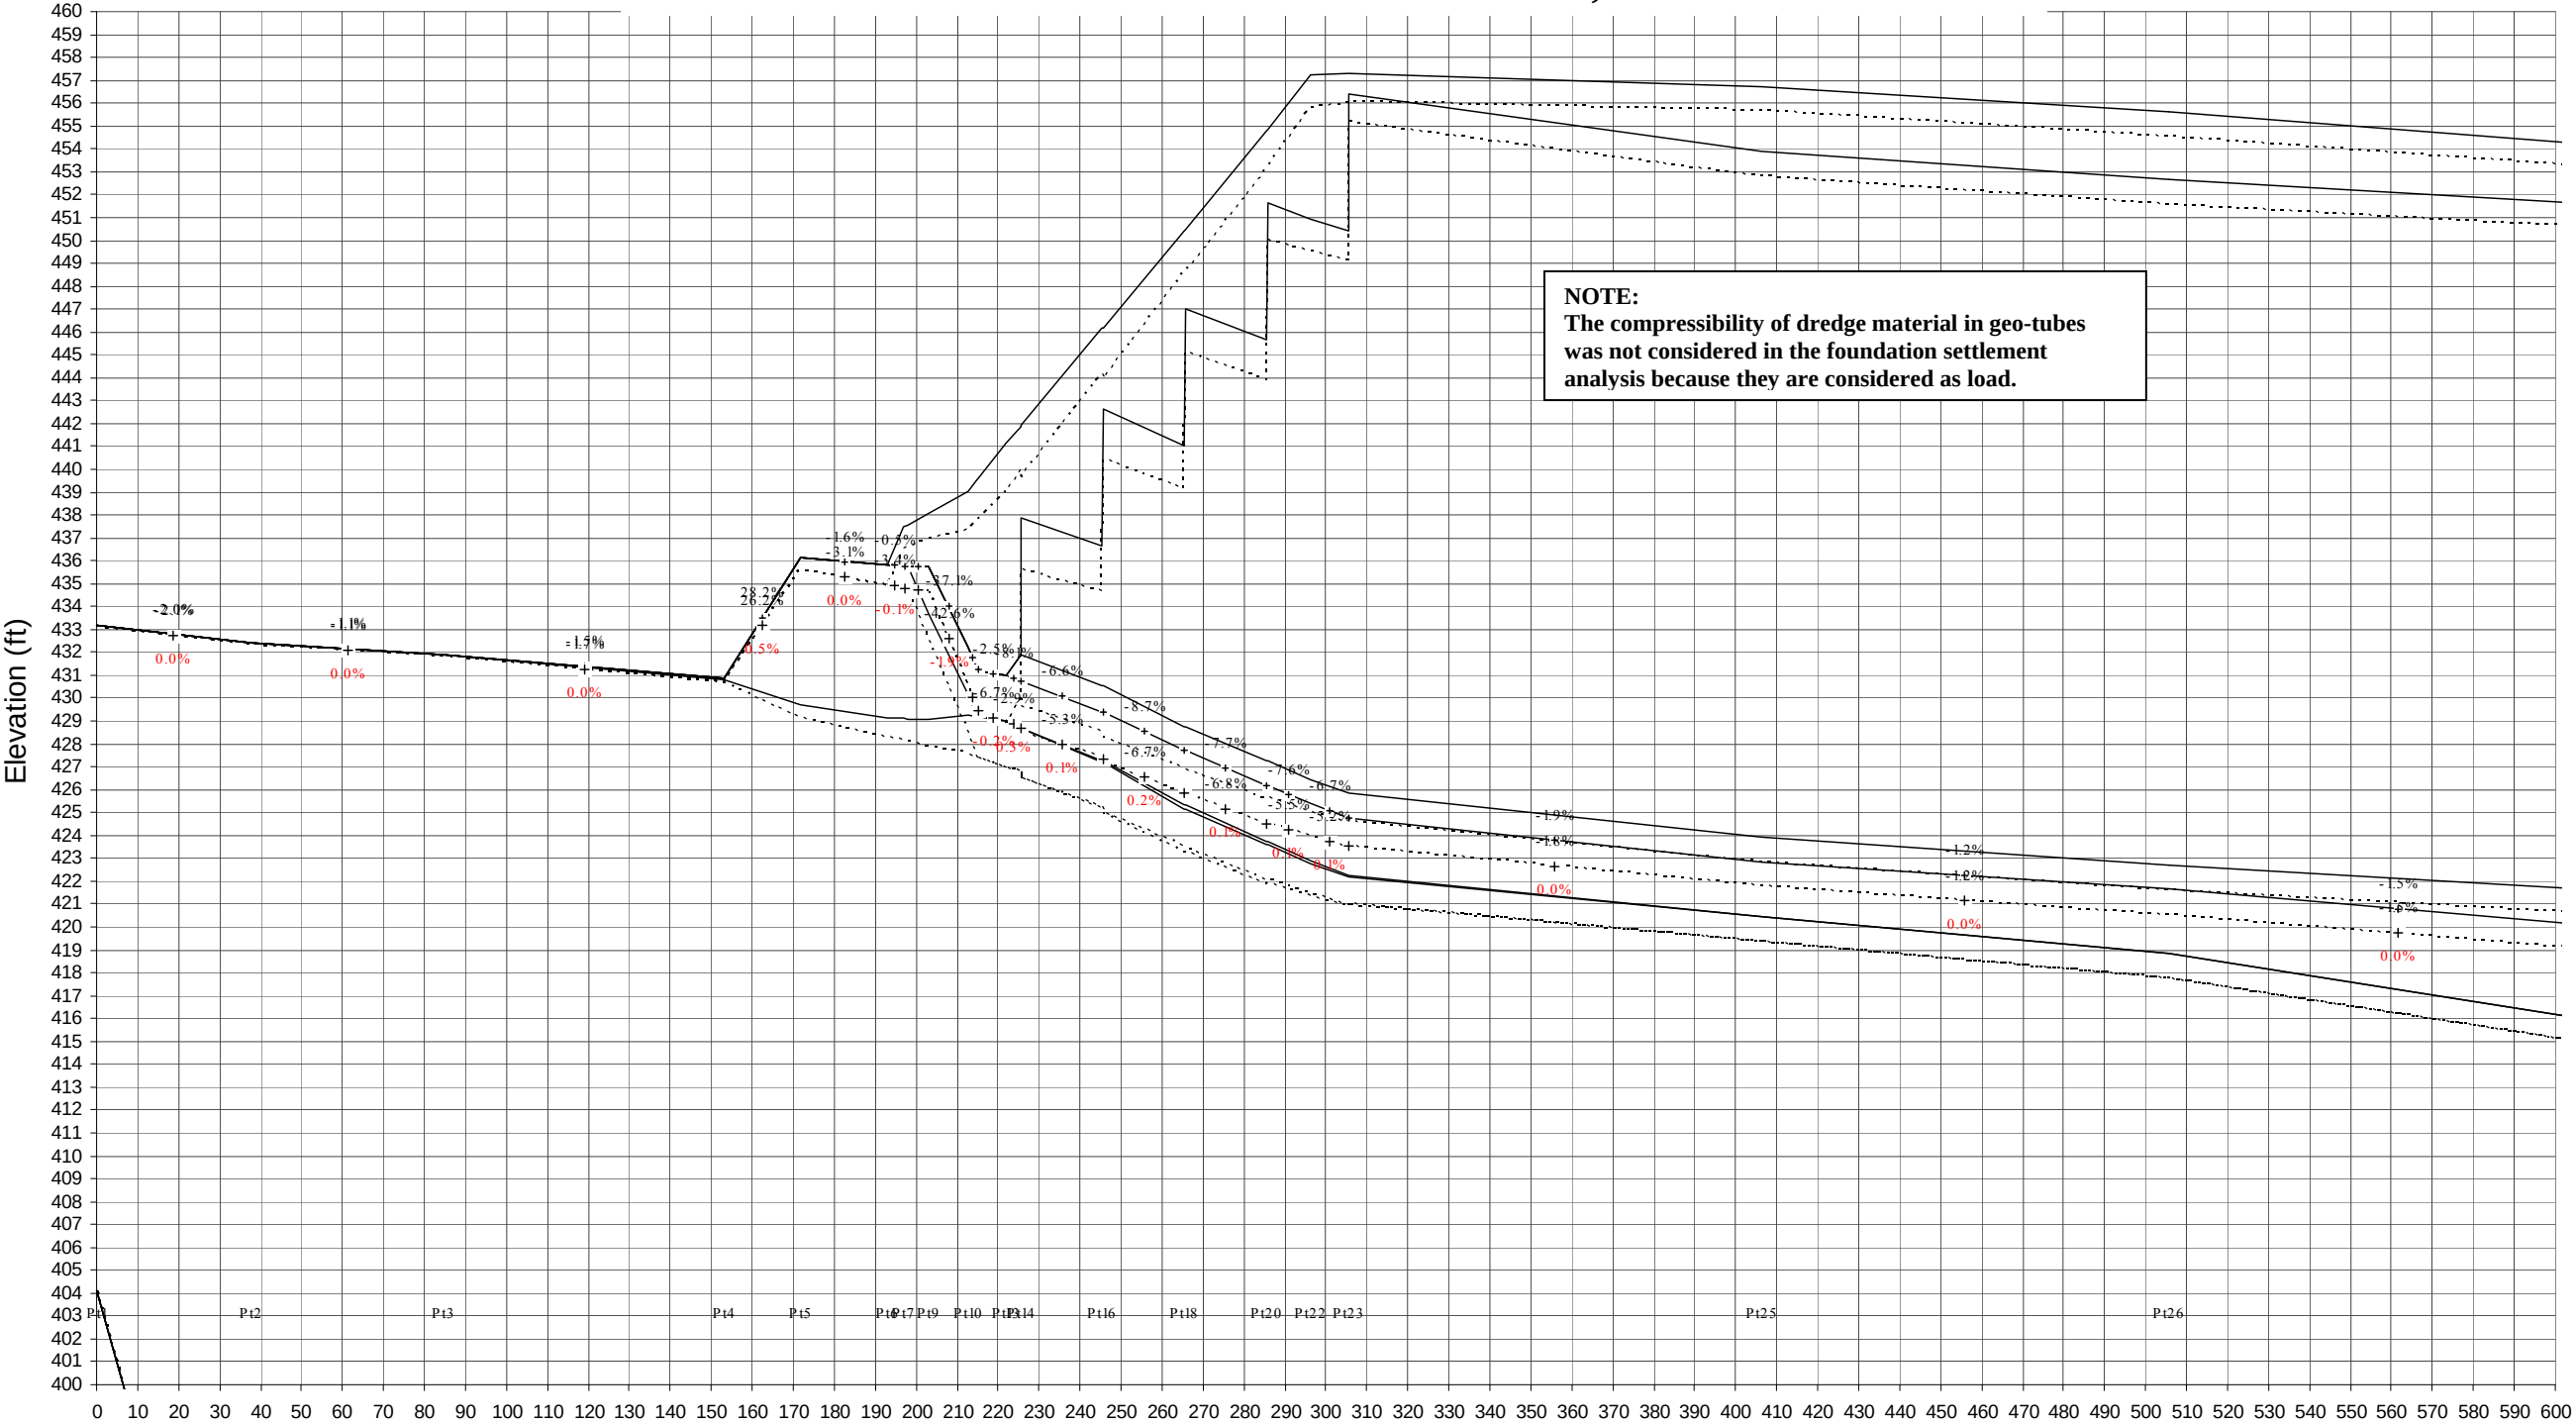


Figure 37. CASE 7: Foundation Settlement Analysis Result for Cross Section B (Left Berm)



Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

Cross Section A Pre- vs. Post- Foundation Settlement Profile, End of YR4

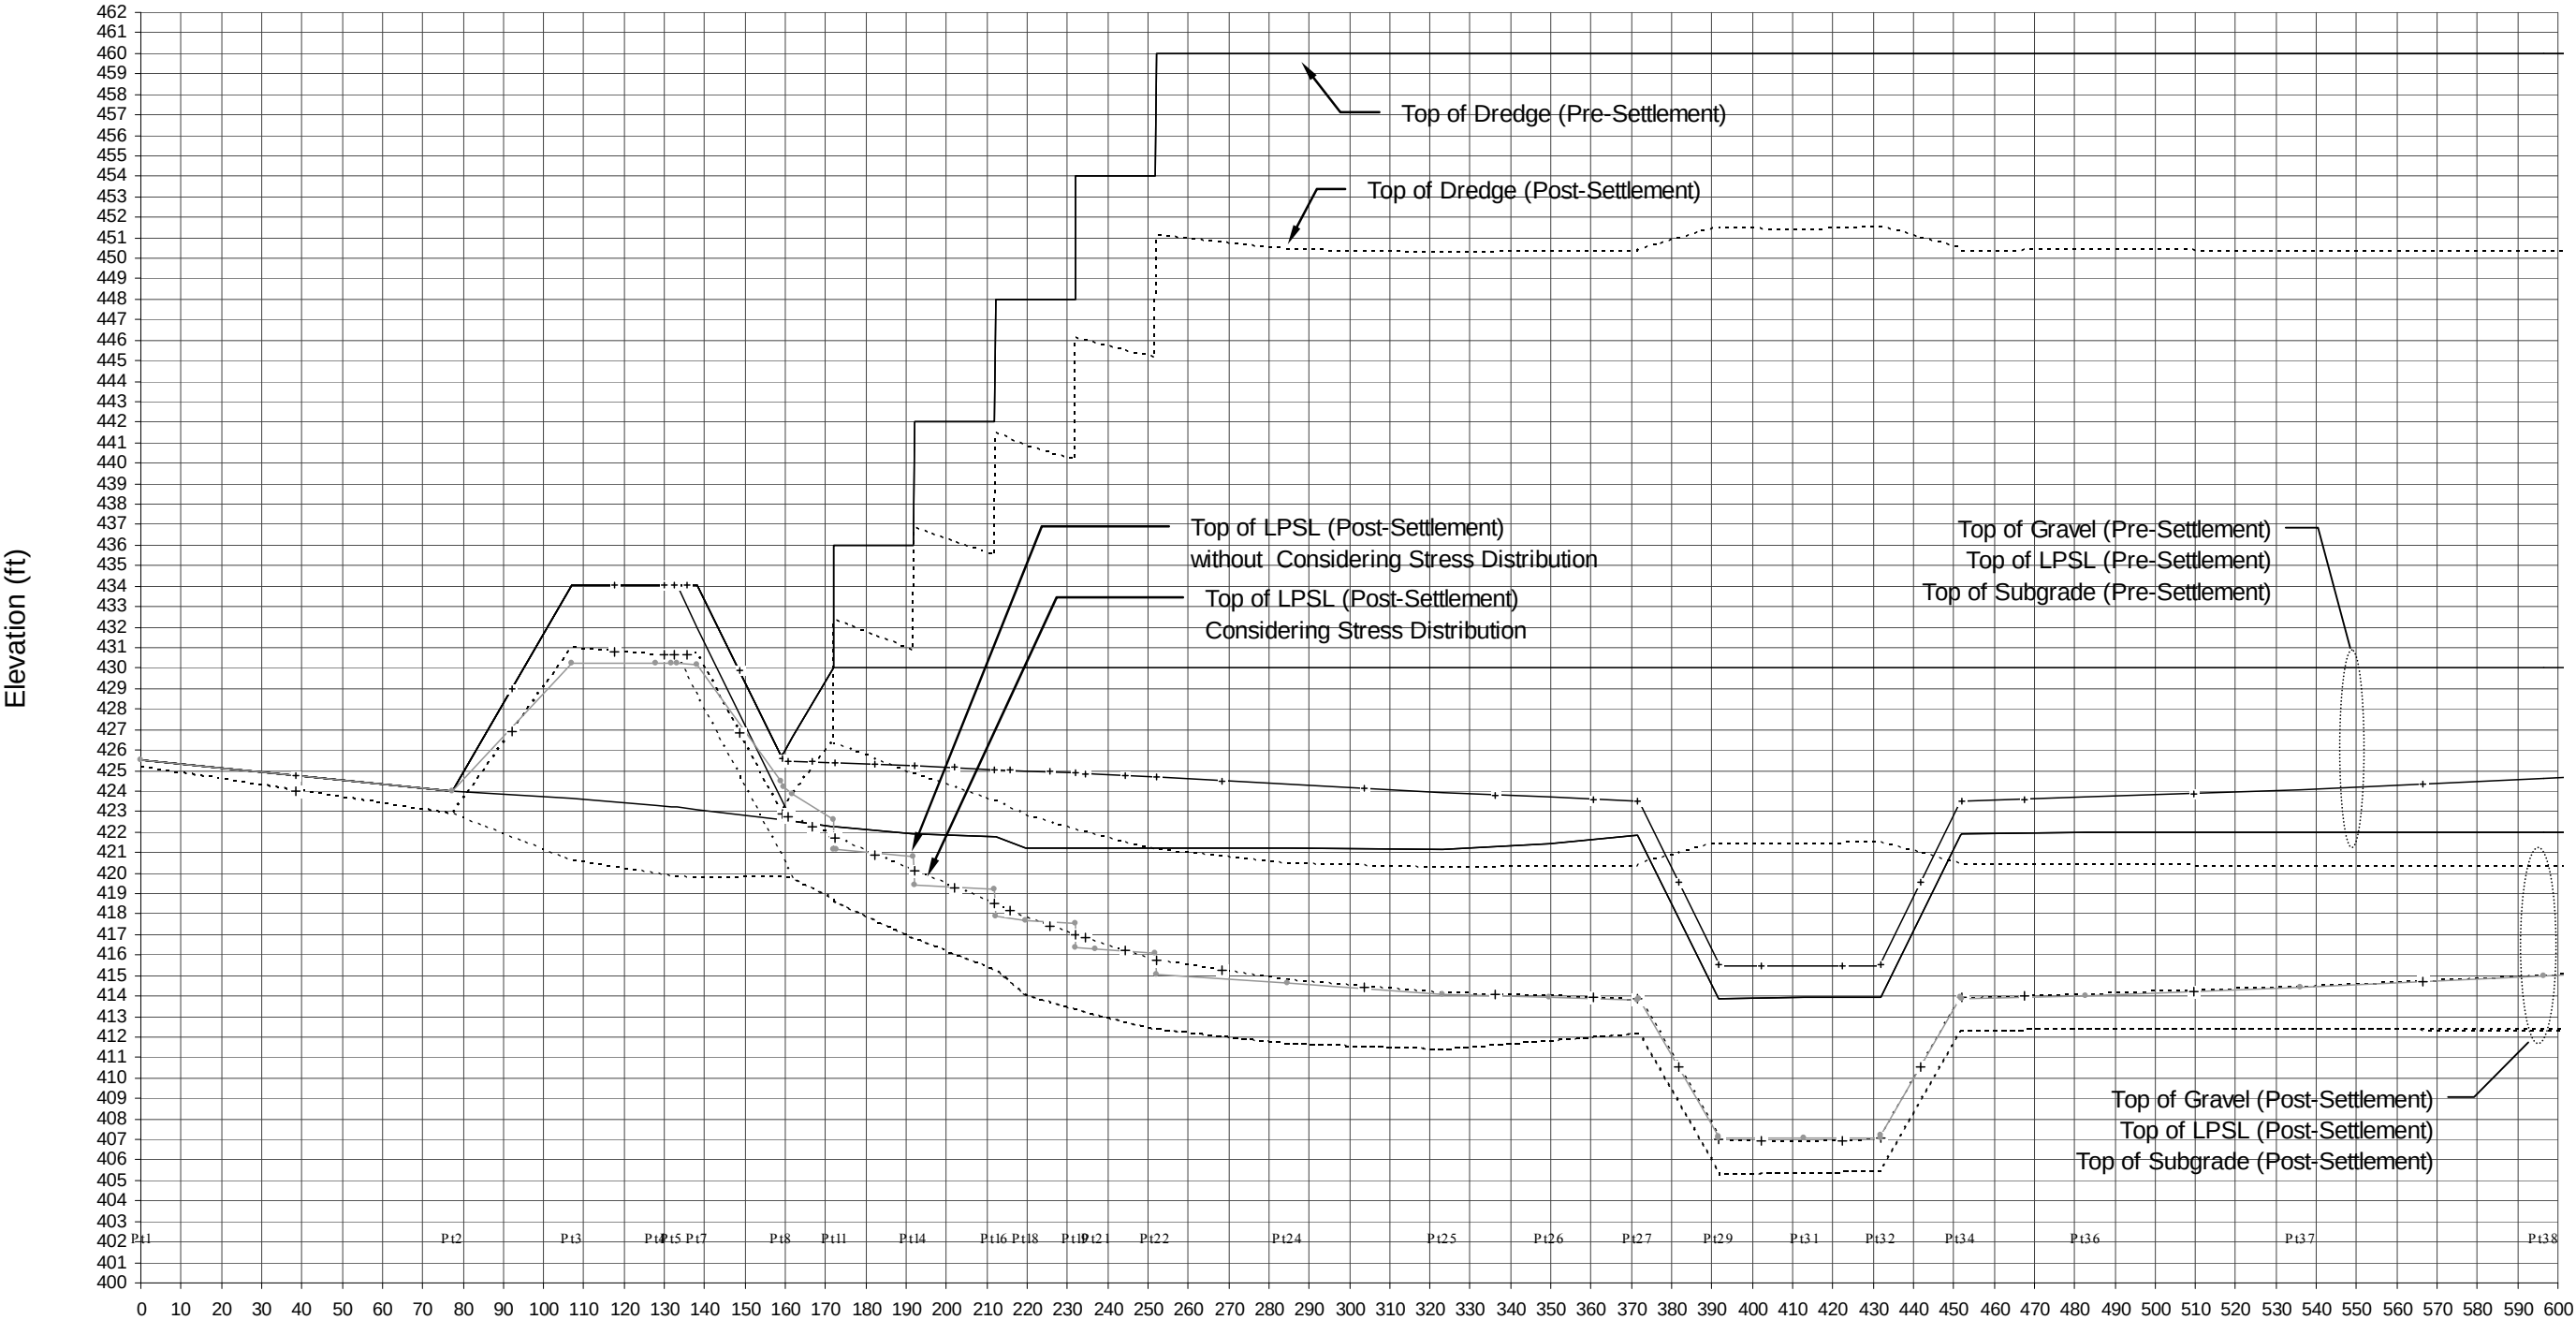


Figure 39. Comparison Between SSM and CSM for Cross Section A

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

Attachment 1

Calculation of Compressibility Parameters for the Settled Dredge Material

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: Honeywell Project: Onondaga Lake SCA Final Design Project/ Proposal No.: GJ4299 Task No.: 04

CALCULATION OF COMPRESSIBILITY PARAMETERS FOR DREDGE MATERIAL INSIDE GEO-TUBES

Three parameters were calculated from laboratory test data of samples of dredge material provided to Geosyntec by Parsons: (i) Modified Compression Index (C_{ce}); (ii) Modified Recompression Index (C_{re}); and (iii) Secondary Compression Index ($C_{\alpha\epsilon}$).

The modified Compression Index (C_{ce}) and modified Recompression Index (C_{re}) were computed using Equations 1-1 and 1-2 below:

$$C_{ce} = C_c / (1 + e_0) \quad (1-1)$$

$$C_{re} = C_r / (1 + e_0) \quad (1-2)$$

Where:

- C_{ce} = Modified Compression Index
- C_c = Compression Index
- C_{re} = Modified Recompression Index
- C_r = Recompression Index
- e_0 = Initial Void Ratio

Seven samples that are considered representative of the anticipated dredge material were taken from borings within Sediment Management Unit (SMU) 1 and the modified compression and recompression parameters were calculated as shown in the following table.

Location ID	Field Sample ID	Compression Index (Cc)	Recompression Index (Cr)	Initial Void Ratio (e ₀)	Modified Compression Index (C _{ce})	Modified Recompression Index (C _{re})
OL-STA-10025	OL-0052-13	2.04	0.02	4.53	0.368539	0.003831
OL-STA-10026	OL-0052-19	1.22	0.03	3.17	0.291937	0.006516
OL-STA-10019	OL-0110-30	0.08	0.01	4.24	0.014589	0.002285
OL-STA-10023	OL-0052-06	1.59	0.02	3.38	0.362000	0.005415
OL-STA-10024	OL-0052-07	1.18	0.02	3.08	0.289855	0.004684
OL-STA-10024	OL-0052-09	2.84	0.03	4.93	0.479155	0.005397
OL-STA-10014	OL-0110-08	0.94	0.01	3.05	0.233329	0.003639

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: Honeywell Project: Onondaga Lake SCA Final Design Project/ Proposal No.: GJ4299 Task No.: 04

Based on the results of the laboratory testing, calculated average values of $C_{ce}=0.291$ and $C_{re}=0.0045$ were input into the settlement calculations.

The modified Secondary Compression Index ($C_{\alpha\varepsilon}$) was calculated based on laboratory consolidation test data provided to Geosyntec by Parsons. These test data included 12 constant load steps for each of seven samples from the SMU 1 area. The percent strain as a function of time on a logarithmic scale for each load step was graphed and the modified secondary compression index found graphically using Equation 1-3 below.

$$C_{\alpha\varepsilon} = \Delta E_x / \Delta \log_{10} t \quad C_{\alpha\varepsilon} = \Delta E_x / \Delta \log_{10} t \quad (1-3)$$

Where:

$C_{\alpha\varepsilon}$ = Modified Secondary Compression Index

ΔE_x = Change in strain

$\Delta \log_{10} t$ = Logarithmic change in time

This was repeated for every load step of the seven samples tested and results were compiled into tables. These $C_{\alpha\varepsilon}$ values were also graphed as a function of stress ratio, as shown in Figure 1-1 and a simplified design curve for $C_{\alpha\varepsilon}$ was created based upon the graphical distribution of values. The recommended secondary compression ratio for design is shown in Equations 1-4 and 1-5 below:

$$C_{\alpha\varepsilon} = 0.08\% \text{ for } \frac{\sigma_v'}{P_c'} \leq 1.0 \quad (1-4)$$

$$C_{\alpha\varepsilon} = 0.60\% \text{ for } \frac{\sigma_v'}{P_c'} > 1.0 \quad (1-5)$$

Where:

σ_v' = Vertical Effective Stress (psf)

P_c' = Preconsolidation Pressure (psf)

This recommended design value envelope is a stair-step function based on the results of the laboratory testing. The design value of $C_{\alpha\varepsilon}=0.08\%$ for stress ratios smaller than 1.0

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

is identical to the numerical average of these tests. For stress ratios larger than 1.0, the numerical average is $C_{\alpha\varepsilon}=0.26\%$, however, due to the presence of several large laboratory compression index values, the design value has been increased to a recommended design value of $C_{\alpha\varepsilon}=0.60\%$. The higher design value will result in larger calculated secondary compression settlements, which is conservative.

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: Honeywell Project: Onondaga Lake SCA Final Design Project/ Proposal No.: GJ4299 Task No.: 04

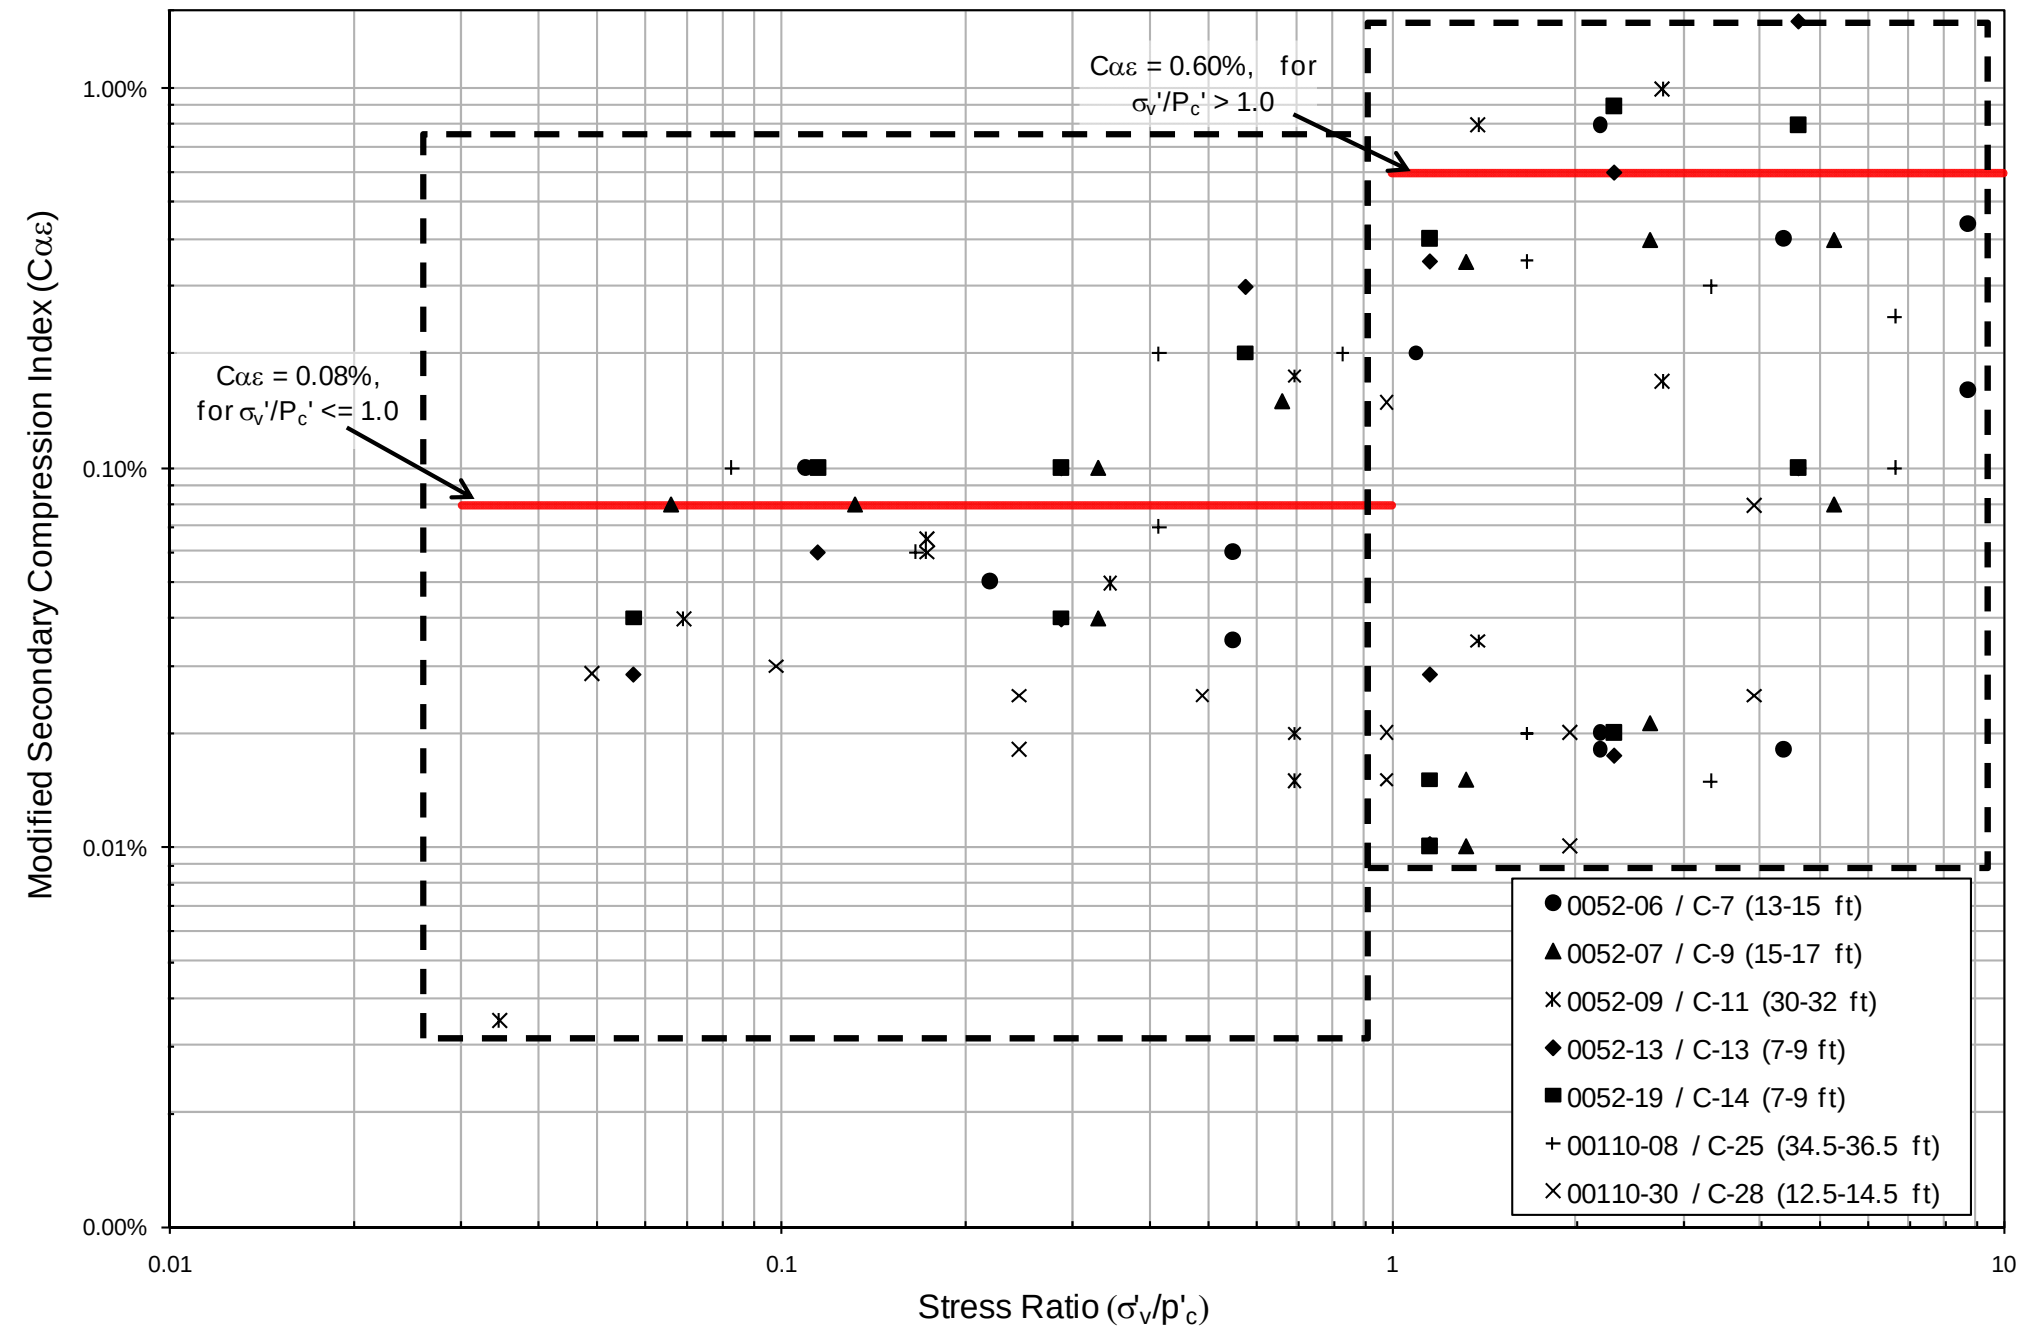


Figure 1-1: Secondary Compression Ratio of SOLW as a Function of Stress Ratio

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

Attachment 2

CASE 1: Settlement Analysis for Top of LPSL at the End of the Operations Period (i.e., End of Year 4) (Points 1001 to 1010)

Written by: **Yiwen Cao** Date: **12/17/2009** Reviewed by: **R. Kulasingam/Jay Beech** Date: **12/17/2009**

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

Settlement Prediction Model													
Programmer: Yiwen Cao, GeoSyntec Consultants													
Version Control V 1.002 11.14.2007													
Project: Onondaga Lake SCA Final													
Notes:													
Unit: ft / psf													
Average Compaction Effort = 1440.00 kPa or psf													
Consider Compaction Effort = N yes or no													
Point #				1001	1002	1003	1004	1005	1006	1007	1008	1009	1010
Distance (meter or ft)				0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
ELEVATION (M/FT)	Line 1	Top of Dredge		463.00	462.42	462.35	462.00	461.75	461.72	464.00	464.34	464.42	464.33
	Line 2	Top of Dredge		463.00	462.42	462.35	462.00	461.75	461.72	464.00	464.34	464.42	464.33
	Line 3	Top of Gravel		433.00	432.42	432.35	432.00	431.75	431.72	434.00	434.34	434.42	434.33
	Line 4	Top of Clay		431.77	431.00	431.00	430.72	430.00	430.00	432.60	433.00	433.00	433.00
	Line 5	Top of Dike		430.02	429.02	429.25	428.78	427.14	427.77	430.80	431.00	431.03	431.00
	Line 6	Top of Subgrade		430.02	429.02	429.25	428.78	427.10	427.77	430.80	431.00	431.03	431.00
	Line 7			427.67	426.67	426.89	426.43	424.75	425.41	428.45	428.65	428.03	428.65
	Line 8			425.32	424.32	424.54	424.08	422.40	423.06	426.10	426.29	425.02	426.29
	Line 9			422.96	421.96	422.18	421.72	420.05	420.71	423.74	423.94	422.02	423.94
	Line 10			420.61	419.61	419.83	419.37	417.70	418.36	421.39	421.59	419.02	421.58
	Line 11			418.26	417.26	417.47	417.02	415.35	416.00	419.04	419.23	416.02	419.23
	Line 12			415.90	414.90	415.12	414.67	413.00	413.65	416.69	416.88	413.02	416.88
	Line 13			413.55	412.55	412.76	412.31	410.65	411.30	414.33	414.53	410.02	414.52
	Line 14			411.20	410.20	410.41	409.96	408.29	408.94	411.98	412.18	407.01	412.17
	Line 15			408.84	407.85	408.05	407.61	405.94	406.59	409.63	409.82	404.01	409.82
	Line 16			406.49	405.49	405.70	405.25	403.59	404.24	407.27	407.47	401.01	407.46
	Line 17			404.14	403.14	403.34	402.90	401.24	401.89	404.92	405.12	398.01	405.11
	Line 18			401.79	400.79	400.99	400.55	398.89	399.53	402.57	402.76	395.01	402.76
	Line 19			399.43	398.43	398.63	398.19	396.54	397.18	400.21	400.41	392.01	400.40
	Line 20			397.08	396.08	396.28	395.84	394.19	394.83	397.86	398.06	389.00	398.05
	Line 21			394.73	393.73	393.92	393.49	391.84	392.48	395.51	395.71	386.00	395.70
	Line 22			392.37	391.37	391.57	391.13	389.49	390.12	393.15	393.35	383.00	393.34
	Line 23	Bottom of Zone2 Above GW		390.02	389.02	389.21	388.78	387.14	387.77	390.80	391.00	380.00	390.99
	Line 24			390.02	389.02	389.21	388.78	387.14	387.77	390.80	391.00	380.00	390.99
	Line 25	Bottom of Zone 3 Above GW		390.02	389.02	389.21	388.78	387.14	387.77	390.80	391.00	380.00	390.99
	Line 26			382.51	382.01	382.11	381.89	381.07	381.39	382.90	383.50	380.00	385.50
	Line 27	Bottom of Zone 2 Below GW		375.00	375.00	375.00	375.00	375.00	375.00	375.00	380.00	380.00	380.00
	Line 28	Top of Incompressible Layer		355.70	361.07	356.29	357.26	362.61	358.34	355.00	380.00	380.00	380.00
	Line 29	GND for sigma p		430.02	429.02	429.25	428.78	427.10	427.77	430.81	431.00	431.04	431.00
	Line 30	GW		375.00	375.00	375.00	375.00	375.00	375.00	375.00	375.00	375.00	375.00
	Line 31	ROCK		355.70	361.07	356.29	357.26	362.61	358.34	355.00	380.00	380.00	380.00
LAYER THICKNESS (M/FT)	Layer No.	From	To	Material									
	1	1	2	Null Layer	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	2	2	3	Dredge	30.00	30.00	30.00	30.00	30.00	30.00	30.00	30.00	30.00
	3	3	4	Gravel	1.23	1.42	1.35	1.28	1.75	1.72	1.40	1.34	1.42
	4	4	5	Clay	1.74	1.98	1.75	1.94	2.86	2.23	1.79	2.00	1.97
	5	5	6	Dike	0.00	0.00	0.01	0.00	0.04	0.00	0.00	0.00	0.00
	6	6	7	Zone2-Above-GW-1	2.35	2.35	2.36	2.35	2.35	2.35	2.35	3.00	2.35
	7	7	8	Zone2-Above-GW-2	2.35	2.35	2.36	2.35	2.35	2.35	2.35	3.00	2.35
	8	8	9	Zone2-Above-GW-3	2.35	2.35	2.36	2.35	2.35	2.35	2.35	3.00	2.35
	9	9	10	Zone2-Above-GW-4	2.35	2.35	2.36	2.35	2.35	2.35	2.35	3.00	2.35
	10	10	11	Zone2-Above-GW-5	2.35	2.35	2.36	2.35	2.35	2.35	2.35	3.00	2.35
	11	11	12	Zone2-Above-GW-6	2.35	2.35	2.36	2.35	2.35	2.35	2.35	3.00	2.35
	12	12	13	Zone2-Above-GW-7	2.35	2.35	2.36	2.35	2.35	2.35	2.35	3.00	2.35
	13	13	14	Zone2-Above-GW-8	2.35	2.35	2.36	2.35	2.35	2.35	2.35	3.00	2.35
	14	14	15	Zone2-Above-GW-9	2.35	2.35	2.36	2.35	2.35	2.35	2.35	3.00	2.35
	15	15	16	Zone2-Above-GW-10	2.35	2.35	2.36	2.35	2.35	2.35	2.35	3.00	2.35
	16	16	17	Zone2-Above-GW-11	2.35	2.35	2.36	2.35	2.35	2.35	2.35	3.00	2.35
	17	17	18	Zone2-Above-GW-12	2.35	2.35	2.36	2.35	2.35	2.35	2.35	3.00	2.35
	18	18	19	Zone2-Above-GW-13	2.35	2.35	2.36	2.35	2.35	2.35	2.35	3.00	2.35
	19	19	20	Zone2-Above-GW-14	2.35	2.35	2.36	2.35	2.35	2.35	2.35	3.00	2.35
	20	20	21	Zone2-Above-GW-15	2.35	2.35	2.36	2.35	2.35	2.35	2.35	3.00	2.35
	21	21	22	Zone2-Above-GW-16	2.35	2.35	2.36	2.35	2.35	2.35	2.35	3.00	2.35
	22	22	23	Zone2-Above-GW-17	2.35	2.35	2.36	2.35	2.35	2.35	2.35	3.00	2.35
	23	23	24	Zone3-Above-GW-1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	24	24	25	Zone3-Above-GW-2	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	25	25	26	Zone2-Below-GW-18	7.51	7.01	7.10	6.89	6.07	6.38	7.90	5.50	0.00
	26	26	27	Zone2-Below-GW-19	7.51	7.01	7.11	6.89	6.07	6.38	7.90	5.50	0.00
	27	27	28	Zone3-Below-GW-3	19.30	13.93	18.71	17.74	12.39	16.66	20.00	0.00	0.00
	28												
	29	29	30	Soil Above GW	55.02	54.02	54.25	53.78	52.10	52.77	55.81	56.00	56.04
	30	30	31	Soil Below GW	19.30	13.93	18.71	17.74	12.39	16.66	20.00	-5.00	-5.00
	Thickness Check												
	From Line		To Line	SUM	107.30	101.35	106.06	104.74	99.14	103.38	109.00	84.34	84.42
	I		28	Thickness =	107.30	101.35	106.06	104.74	99.14	103.38	109.00	84.34	84.42
	Thickness Check				OK	OK	OK	OK	OK	OK	OK	OK	OK

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: Honeywell Project: Onondaga Lake SCA Final Design Project/ Proposal No.: GJ4299 Task No.: 04

UNIT WEIGHT	Layer No.	Material										
	1	Null Layer	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	2	Dredge	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	3	Gravel	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0
	4	Clay	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0
	5	Dike	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0
	6	Zone2-Above-GW-1	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	7	Zone2-Above-GW-2	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	8	Zone2-Above-GW-3	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	9	Zone2-Above-GW-4	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	10	Zone2-Above-GW-5	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	11	Zone2-Above-GW-6	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	12	Zone2-Above-GW-7	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	13	Zone2-Above-GW-8	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	14	Zone2-Above-GW-9	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	15	Zone2-Above-GW-10	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	16	Zone2-Above-GW-11	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	17	Zone2-Above-GW-12	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	18	Zone2-Above-GW-13	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	19	Zone2-Above-GW-14	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	20	Zone2-Above-GW-15	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	21	Zone2-Above-GW-16	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	22	Zone2-Above-GW-17	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	23	Zone3-Above-GW-1	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	24	Zone3-Above-GW-2	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	25	Zone2-Below-GW-18	19.6	19.6	19.6	19.6	19.6	19.6	19.6	19.6	19.6	19.6
	26	Zone2-Below-GW-19	19.6	19.6	19.6	19.6	19.6	19.6	19.6	19.6	19.6	19.6
	27	Zone3-Below-GW-3	19.6	19.6	19.6	19.6	19.6	19.6	19.6	19.6	19.6	19.6
	28											
	29	Soil Above GW	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	30	Soil below GW	19.6	19.6	19.6	19.6	19.6	19.6	19.6	19.6	19.6	19.6
	Layer No.	1	Null Layer									
			Initial Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1
			Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1
		Midpoint Elevation, (m / ft)	463.00	462.42	462.35	462.00	461.75	461.72	464.00	464.34	464.42	464.33
		Initial Effective Stress, σ'_i (kPa / psf)	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight
		Final Effective Stress, σ'_f (kPa/psf)	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight
Elastic Method												
Modulus, E (kPa/psf)=			Strain									
			Settlement (m / ft)									
1-D Consolidation Theory (Plastic Method)												
Consolidation Properties												
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)												
OCR Manual Input Value												
OCR Computation Input												
Preconsolidation pressure, σ'_p (kPa / psf)												
Modified Primary Compression Index, C_{cc}												
Modified Recompression Index, C_{re}												
Modified Secondary Compression Index, C_{α}												
ratio of t_2 / t_1												
Settlements												
Primary Settlement, (m / ft)												
Secondary Settlement (m / ft)												
Total Settlement (m / ft)												
Elastic or Plastic (E/P)												
Settlement of Layer 1 (m / ft)												

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: Honeywell Project: Onondaga Lake SCA Final Design Project/ Proposal No.: GJ4299 Task No.: 04

	Layer No. 2	Dredge									
	Initial Stress Reference Layer (top of layer)										
	Final Stress Reference Layer (top of layer)										
	Midpoint Elevation, (m / ft)	2	2	2	2	2	2	2	2	2	2
	Initial Effective Stress, σ'_i (kPa /psf)	2	2	2	2	2	2	2	2	2	2
	Final Effective Stress, σ'_f (kPa/psf)	2	2	2	2	2	2	2	2	2	2
Elastic Method											
Modulus, E (kPa/psf)=		Strain									
		Settlement (m / ft)									
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)											
OCR Manual Input Value											
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)											
Modified Primary Compression Index, C_{cc}											
Modified Recompression Index, C_{re}											
Modified Secondary Compression Index, $C_{\alpha\alpha}$											
ratio of t_2 / t_1											
Settlements											
Primary Settlement, (m / ft)											
Secondary Settlement (m / ft)											
Total Settlement (m / ft)											
		Elastic or Plastic (E/P)									
		Settlement of Layer 2 (m / ft)									
	Layer No. 3	Gravel									
	Initial Stress Reference Layer (top of layer)										
	Final Stress Reference Layer (top of layer)										
	Midpoint Elevation, (m / ft)	3	3	3	3	3	3	3	3	3	3
	Initial Effective Stress, σ'_i (kPa /psf)	3	3	3	3	3	3	3	3	3	3
	Final Effective Stress, σ'_f (kPa/psf)	3	3	3	3	3	3	3	3	3	3
Elastic Method											
Modulus, E (kPa/psf)=		Strain									
		Settlement (m / ft)									
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)											
OCR Manual Input Value											
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)											
Modified Primary Compression Index, C_{cc}											
Modified Recompression Index, C_{re}											
Modified Secondary Compression Index, $C_{\alpha\alpha}$											
ratio of t_2 / t_1											
Settlements											
Primary Settlement, (m / ft)											
Secondary Settlement (m / ft)											
Total Settlement (m / ft)											
		Elastic or Plastic (E/P)									
		Settlement of Layer 3 (m / ft)									
	Layer No. 4	Clay									
	Initial Stress Reference Layer (top of layer)										
	Final Stress Reference Layer (top of layer)										
	Midpoint Elevation, (m / ft)	4	4	4	4	4	4	4	4	4	4
	Initial Effective Stress, σ'_i (kPa /psf)	4	4	4	4	4	4	4	4	4	4
	Final Effective Stress, σ'_f (kPa/psf)	4	4	4	4	4	4	4	4	4	4
Elastic Method											
Modulus, E (kPa/psf)=		Strain									
		Settlement (m / ft)									
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)											
OCR Manual Input Value											
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)											
Modified Primary Compression Index, C_{cc}											
Modified Recompression Index, C_{re}											
Modified Secondary Compression Index, $C_{\alpha\alpha}$											
ratio of t_2 / t_1											
Settlements											
Primary Settlement, (m / ft)											
Secondary Settlement (m / ft)											
Total Settlement (m / ft)											
		Elastic or Plastic (E/P)									
		Settlement of Layer 4 (m / ft)									

Written by: **Yiwen Cao** Date: **12/17/2009** Reviewed by: **R. Kulasingam/Jay Beech** Date: **12/17/2009**

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

	Layer No.	5	Dike										
			Initial Stress Reference Layer (top of layer)	5	5	5	5	5	5	5	5	5	5
			Final Stress Reference Layer (top of layer)	5	5	5	5	5	5	5	5	5	5
			Midpoint Elevation, (m / ft)	430.02	429.02	429.25	428.78	427.12	427.77	430.80	431.00	431.03	431.00
			Initial Effective Stress, σ _{v'} (kPa /psf)	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight
			Final Effective Stress, σ _{v'} (kPa/psf)	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight
Elastic Method													
Modulus, E (kPa/psf)=													
			Strain										
			Settlement (m / ft)										
1-D Consolidation Theory (Plastic Method)													
Consolidation Properties													
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)													
OCR Manual Input Value													
OCR Computation Input													
Preconsolidation pressure, σ _{p'} (kPa / psf)													
Modified Primary Compression Index, C _{cc}													
Modified Recompression Index, C _{re}													
Modified Secondary Compression Index, C _{αc}													
ratio of t2 / t1													
Settlements													
Primary Settlement, (m / ft)													
Secondary Settlement (m / ft)													
Total Settlement (m / ft)													
Elastic or Plastic (E/P)													
Settlement of Layer 5 (m / ft)													
	Layer No.	6	Zone2-Above-GW-1										
			Initial Stress Reference Layer (top of layer)	6	6	6	6	6	6	6	6	6	6
			Final Stress Reference Layer (top of layer)	6	6	6	6	6	6	6	6	6	6
			Midpoint Elevation, (m / ft)	428.85	427.85	428.07	427.61	425.92	426.59	429.63	429.82	429.53	429.82
			Initial Effective Stress, σ _{v'} (kPa /psf)	96.48	96.48	96.56	96.48	96.37	96.46	96.48	96.47	123.07	96.49
			Final Effective Stress, σ _{v'} (kPa/psf)	3,033.81	3,084.28	3,048.57	3,062.36	3,234.78	3,151.01	3,059.94	3,077.83	3,109.71	3,075.94
Elastic Method													
Modulus, E (kPa/psf)=													
			Strain										
			Settlement (m / ft)										
1-D Consolidation Theory (Plastic Method)													
Consolidation Properties													
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)				MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value				4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5
OCR Computation Input													
Preconsolidation pressure, σ _{p'} (kPa / psf)				434	434	435	434	434	434	437	435	557	435
Modified Primary Compression Index, C _{cc}				0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460
Modified Recompression Index, C _{re}				0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014
Modified Secondary Compression Index, C _{αc}				0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%
ratio of t2 / t1				8	8	8	8	8	8	8	8	8	8
Settlements													
Primary Settlement, (m / ft)				0.935	0.943	0.938	0.940	0.965	0.953	0.936	0.941	1.059	0.942
Secondary Settlement (m / ft)				0.019	0.019	0.019	0.019	0.019	0.019	0.019	0.019	0.025	0.019
Total Settlement (m / ft)				0.955	0.963	0.957	0.959	0.984	0.973	0.955	0.961	1.084	0.961
Elastic or Plastic (E/P)													
Settlement of Layer 6 (m / ft)				1-D 0.955	1-D 0.963	1-D 0.957	1-D 0.959	1-D 0.984	1-D 0.973	1-D 0.955	1-D 0.961	1-D 1.084	1-D 0.961
	Layer No.	7	Zone2-Above-GW-2										
			Initial Stress Reference Layer (top of layer)	6	6	6	6	6	6	6	6	6	6
			Final Stress Reference Layer (top of layer)	6	6	6	6	6	6	6	6	6	6
			Midpoint Elevation, (m / ft)	426.49	425.49	425.71	425.25	423.57	424.24	427.27	427.47	426.53	427.47
			Initial Effective Stress, σ _{v'} (kPa /psf)	289.43	289.44	289.67	289.44	289.11	289.38	289.44	289.40	369.20	289.48
			Final Effective Stress, σ _{v'} (kPa/psf)	3,226.76	3,277.24	3,241.68	3,255.33	3,427.52	3,343.93	3,252.90	3,270.76	3,355.85	3,268.92
Elastic Method													
Modulus, E (kPa/psf)=													
			Strain										
			Settlement (m / ft)										
1-D Consolidation Theory (Plastic Method)													
Consolidation Properties													
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)				MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value				4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5
OCR Computation Input													
Preconsolidation pressure, σ _{p'} (kPa / psf)				1,302	1,302	1,304	1,302	1,301	1,302	1,306	1,303	1,664	1,303
Modified Primary Compression Index, C _{cc}				0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460
Modified Recompression Index, C _{re}				0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014
Modified Secondary Compression Index, C _{αc}				0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%
ratio of t2 / t1				8	8	8	8	8	8	8	8	8	8
Settlements													
Primary Settlement, (m / ft)				0.448	0.455	0.450	0.452	0.476	0.465	0.451	0.454	0.448	0.454
Secondary Settlement (m / ft)				0.019	0.019	0.019	0.019	0.019	0.019	0.019	0.019	0.025	0.019
Total Settlement (m / ft)				0.467	0.475	0.470	0.471	0.496	0.484	0.470	0.473	0.473	0.473
Elastic or Plastic (E/P)													
Settlement of Layer 7 (m / ft)				1-D 0.467	1-D 0.475	1-D 0.470	1-D 0.471	1-D 0.496	1-D 0.484	1-D 0.470	1-D 0.473	1-D 0.473	1-D 0.473

Written by: **Yiwen Cao** Date: **12/17/2009** Reviewed by: **R. Kulasingam/Jay Beech** Date: **12/17/2009**

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

Layer No. 8 Zone2-Above-GW-3											
Initial Stress Reference Layer (top of layer)		6	6	6	6	6	6	6	6	6	6
Final Stress Reference Layer (top of layer)		1	1	1	1	1	1	1	1	1	1
Midpoint Elevation, (m / ft)		424.14	423.14	423.36	422.90	421.22	421.88	424.92	425.12	423.52	425.12
Initial Effective Stress, σ'_i (kPa / psf)		482.38	482.40	482.78	482.40	481.85	482.30	482.41	482.33	615.34	482.46
Final Effective Stress, σ'_f (kPa/psf)		3,419.72	3,470.20	3,434.79	3,448.29	3,620.26	3,536.85	3,445.87	3,463.69	3,601.99	3,461.90
Elastic Method											
Modulus, E (kPa/psf)=											
Strain											
Settlement (m / ft)											
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)		MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value		4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)		2,171	2,171	2,173	2,171	2,168	2,170	2,174	2,171	2,772	2,172
Modified Primary Compression Index, C_{cc}		0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460
Modified Recompression Index, C_{re}		0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014
Modified Secondary Compression Index, $C_{\alpha\alpha}$		0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%
ratio of t_2 / t_1		8	8	8	8	8	8	8	8	8	8
Settlements											
Primary Settlement, (m / ft)		0.235	0.242	0.237	0.239	0.262	0.251	0.238	0.241	0.185	0.241
Secondary Settlement (m / ft)		0.019	0.019	0.019	0.019	0.019	0.019	0.019	0.019	0.025	0.019
Total Settlement (m / ft)		0.255	0.261	0.256	0.258	0.282	0.270	0.257	0.260	0.209	0.260
Elastic or Plastic (E/P)		1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D
Settlement of Layer 8 (m / ft)		0.255	0.261	0.256	0.258	0.282	0.270	0.257	0.260	0.209	0.260
Layer No. 9 Zone2-Above-GW-4											
Initial Stress Reference Layer (top of layer)		6	6	6	6	6	6	6	6	6	6
Final Stress Reference Layer (top of layer)		1	1	1	1	1	1	1	1	1	1
Midpoint Elevation, (m / ft)		421.79	420.79	421.00	420.55	418.87	419.53	422.57	422.76	420.52	422.76
Initial Effective Stress, σ'_i (kPa / psf)		675.33	675.36	675.90	675.37	674.60	675.22	675.37	675.26	861.48	675.44
Final Effective Stress, σ'_f (kPa/psf)		3,612.67	3,663.16	3,627.91	3,641.25	3,813.00	3,729.78	3,638.83	3,656.62	3,848.12	3,654.89
Elastic Method											
Modulus, E (kPa/psf)=											
Strain											
Settlement (m / ft)											
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)		MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value		4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	2.0	4.5
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)		3,039	3,039	3,042	3,039	3,036	3,039	3,042	3,039	1,724	3,040
Modified Primary Compression Index, C_{cc}		0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460
Modified Recompression Index, C_{re}		0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014
Modified Secondary Compression Index, $C_{\alpha\alpha}$		0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%
ratio of t_2 / t_1		8	8	8	8	8	8	8	8	8	8
Settlements											
Primary Settlement, (m / ft)		0.103	0.109	0.104	0.106	0.129	0.118	0.106	0.108	0.494	0.108
Secondary Settlement (m / ft)		0.019	0.019	0.019	0.019	0.019	0.019	0.019	0.019	0.025	0.019
Total Settlement (m / ft)		0.122	0.129	0.124	0.126	0.148	0.137	0.125	0.128	0.519	0.127
Elastic or Plastic (E/P)		1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D
Settlement of Layer 9 (m / ft)		0.122	0.129	0.124	0.126	0.148	0.137	0.125	0.128	0.519	0.127
Layer No. 10 Zone2-Above-GW-5											
Initial Stress Reference Layer (top of layer)		6	6	6	6	6	6	6	6	6	6
Final Stress Reference Layer (top of layer)		1	1	1	1	1	1	1	1	1	1
Midpoint Elevation, (m / ft)		419.43	418.43	418.65	418.19	416.52	417.18	420.22	420.41	417.52	420.41
Initial Effective Stress, σ'_i (kPa / psf)		868.28	868.32	869.01	868.33	867.34	868.14	868.33	868.19	1,107.61	868.43
Final Effective Stress, σ'_f (kPa/psf)		3,805.62	3,856.12	3,821.02	3,834.21	4,005.74	3,922.70	3,831.79	3,849.55	4,094.26	3,847.87
Elastic Method											
Modulus, E (kPa/psf)=											
Strain											
Settlement (m / ft)											
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)		MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value		2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)		1,737	1,737	1,738	1,737	1,735	1,736	1,738	1,737	2,217	1,737
Modified Primary Compression Index, C_{cc}		0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460
Modified Recompression Index, C_{re}		0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014
Modified Secondary Compression Index, $C_{\alpha\alpha}$		0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%
ratio of t_2 / t_1		8	8	8	8	8	8	8	8	8	8
Settlements											
Primary Settlement, (m / ft)		0.379	0.385	0.381	0.382	0.403	0.393	0.382	0.384	0.381	0.384
Secondary Settlement (m / ft)		0.019	0.019	0.019	0.019	0.019	0.019	0.019	0.019	0.025	0.019
Total Settlement (m / ft)		0.398	0.404	0.400	0.402	0.422	0.412	0.401	0.403	0.405	0.403
Elastic or Plastic (E/P)		1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D
Settlement of Layer 10 (m / ft)		0.398	0.404	0.400	0.402	0.422	0.412	0.401	0.403	0.405	0.403

Written by: **Yiwen Cao** Date: **12/17/2009** Reviewed by: **R. Kulasingam/Jay Beech** Date: **12/17/2009**

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

	Layer No.	11 Zone2-Above-GW-6									
	Initial Stress Reference Layer (top of layer)	6	6	6	6	6	6	6	6	6	
	Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	
	Midpoint Elevation, (m / ft)	417.08	416.08	416.29	415.84	414.17	414.83	417.86	418.06	414.52	418.05
	Initial Effective Stress, σ'_i (kPa /psf)	1,061.23	1,061.28	1,062.12	1,061.29	1,060.08	1,061.07	1,061.30	1,061.12	1,353.75	1,061.41
	Final Effective Stress, σ'_f (kPa/psf)	3,998.57	4,049.08	4,014.13	4,027.17	4,198.49	4,115.62	4,024.76	4,042.48	4,340.39	4,040.85
Elastic Method											
Modulus, E (kPa/psf)=											
Strain											
Settlement (m / ft)											
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)		MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value		2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)		2,122	2,123	2,124	2,123	2,120	2,122	2,124	2,123	2,709	2,123
Modified Primary Compression Index, C_{cc}		0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460
Modified Recompression Index, C_{re}		0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014
Modified Secondary Compression Index, $C_{\alpha\alpha}$		0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%
ratio of t2 / t1		8	8	8	8	8	8	8	8	8	8
Settlements											
Primary Settlement, (m / ft)		0.308	0.314	0.309	0.311	0.331	0.321	0.310	0.313	0.295	0.313
Secondary Settlement (m / ft)		0.019	0.019	0.019	0.019	0.019	0.019	0.019	0.019	0.025	0.019
Total Settlement (m / ft)		0.327	0.333	0.329	0.330	0.350	0.341	0.330	0.332	0.320	0.332
Elastic or Plastic (E/P)											
Settlement of Layer 11 (m / ft)		1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D
		0.327	0.333	0.329	0.330	0.350	0.341	0.330	0.332	0.320	0.332
	Layer No.	12 Zone2-Above-GW-7									
	Initial Stress Reference Layer (top of layer)	6	6	6	6	6	6	6	6	6	6
	Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1
	Midpoint Elevation, (m / ft)	414.73	413.73	413.94	413.49	411.82	412.47	415.51	415.70	411.52	415.70
	Initial Effective Stress, σ'_i (kPa /psf)	1,254.19	1,254.24	1,255.23	1,254.25	1,252.82	1,253.99	1,254.26	1,254.05	1,599.89	1,254.39
	Final Effective Stress, σ'_f (kPa/psf)	4,191.52	4,242.04	4,207.25	4,220.14	4,391.23	4,308.54	4,217.72	4,235.42	4,586.53	4,233.84
Elastic Method											
Modulus, E (kPa/psf)=											
Strain											
Settlement (m / ft)											
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)		MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value		2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)		2,508	2,508	2,510	2,509	2,506	2,508	2,510	2,508	3,201	2,509
Modified Primary Compression Index, C_{cc}		0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460
Modified Recompression Index, C_{re}		0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014
Modified Secondary Compression Index, $C_{\alpha\alpha}$		0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%
ratio of t2 / t1		8	8	8	8	8	8	8	8	8	8
Settlements											
Primary Settlement, (m / ft)		0.251	0.257	0.253	0.254	0.273	0.264	0.254	0.256	0.228	0.256
Secondary Settlement (m / ft)		0.019	0.019	0.019	0.019	0.019	0.019	0.019	0.019	0.025	0.019
Total Settlement (m / ft)		0.271	0.276	0.272	0.274	0.293	0.284	0.273	0.275	0.253	0.275
Elastic or Plastic (E/P)											
Settlement of Layer 12 (m / ft)		1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D
		0.271	0.276	0.272	0.274	0.293	0.284	0.273	0.275	0.253	0.275
	Layer No.	13 Zone2-Above-GW-8									
	Initial Stress Reference Layer (top of layer)	6	6	6	6	6	6	6	6	6	6
	Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1
	Midpoint Elevation, (m / ft)	412.37	411.38	411.58	411.14	409.47	410.12	413.16	413.35	408.52	413.35
	Initial Effective Stress, σ'_i (kPa /psf)	1,447	1,447	1,448	1,447	1,446	1,447	1,447	1,447	1,846	1,447
	Final Effective Stress, σ'_f (kPa/psf)	4,384	4,435	4,400	4,413	4,584	4,501	4,411	4,428	4,833	4,427
Elastic Method											
Modulus, E (kPa/psf)=											
Strain											
Settlement (m / ft)											
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)		MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value		2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	1.0	2.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)		2,894	2,894	2,897	2,894	2,891	2,894	2,896	2,894	1,847	2,895
Modified Primary Compression Index, C_{cc}		0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460
Modified Recompression Index, C_{re}		0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014
Modified Secondary Compression Index, $C_{\alpha\alpha}$		0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%
ratio of t2 / t1		8	8	8	8	8	8	8	8	8	8
Settlements											
Primary Settlement, (m / ft)		0.205	0.211	0.207	0.208	0.226	0.218	0.208	0.210	0.577	0.210
Secondary Settlement (m / ft)		0.019	0.019	0.019	0.019	0.019	0.019	0.019	0.019	0.025	0.019
Total Settlement (m / ft)		0.224	0.230	0.226	0.228	0.246	0.237	0.227	0.229	0.602	0.229
Elastic or Plastic (E/P)											
Settlement of Layer 13 (m / ft)		1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D
		0.224	0.230	0.226	0.228	0.246	0.237	0.227	0.229	0.602	0.229

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: Honeywell Project: Onondaga Lake SCA Final Design Project/ Proposal No.: GJ4299 Task No.: 04

	Layer No.	14 Zone2-Above-GW-9									
	Initial Stress Reference Layer (top of layer)	6	6	6	6	6	6	6	6	6	
	Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	
	Midpoint Elevation, (m / ft)	410.02	409.02	409.23	408.78	407.12	407.77	410.80	411.00	405.51	410.99
	Initial Effective Stress, σ'_i (kPa /psf)	1,640	1,640	1,641	1,640	1,638	1,640	1,640	1,640	2,092	1,640
	Final Effective Stress, σ'_f (kPa/psf)	4,577	4,628	4,593	4,606	4,777	4,694	4,604	4,621	5,079	4,620
Elastic Method											
Modulus, E (kPa/psf)=											
Strain											
Settlement (m / ft)											
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)		MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value		1.0	1.0	1.0	1.0	2.0	2.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)		1,640	1,640	1,641	1,640	3,277	3,280	1,641	1,640	2,093	1,640
Modified Primary Compression Index, C_{cc}		0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460
Modified Recompression Index, C_{re}		0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014
Modified Secondary Compression Index, $C_{\alpha\alpha}$		0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%
ratio of t2 / t1		8	8	8	8	8	8	8	8	8	8
Settlements											
Primary Settlement, (m / ft)		0.482	0.488	0.484	0.485	0.187	0.178	0.485	0.487	0.532	0.487
Secondary Settlement (m / ft)		0.019	0.019	0.019	0.019	0.019	0.019	0.019	0.019	0.025	0.019
Total Settlement (m / ft)		0.502	0.507	0.503	0.505	0.206	0.198	0.504	0.506	0.556	0.506
Elastic or Plastic (E/P)											
1-D		P	P	P	P	P	P	P	P	P	P
Settlement of Layer 14 (m / ft)		0.502	0.507	0.503	0.505	0.206	0.198	0.504	0.506	0.556	0.506
	Layer No.	15 Zone2-Above-GW-10									
	Initial Stress Reference Layer (top of layer)	6	6	6	6	6	6	6	6	6	6
	Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1
	Midpoint Elevation, (m / ft)	407.67	406.67	406.87	406.43	404.77	405.42	408.45	408.65	402.51	408.64
	Initial Effective Stress, σ'_i (kPa /psf)	1,833	1,833	1,835	1,833	1,831	1,833	1,833	1,833	2,338	1,833
	Final Effective Stress, σ'_f (kPa/psf)	4,770	4,821	4,787	4,799	4,969	4,887	4,797	4,814	5,325	4,813
Elastic Method											
Modulus, E (kPa/psf)=											
Strain											
Settlement (m / ft)											
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)		MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value		1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)		1,833	1,833	1,835	1,833	1,831	1,833	1,834	1,833	2,339	1,833
Modified Primary Compression Index, C_{cc}		0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460
Modified Recompression Index, C_{re}		0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014
Modified Secondary Compression Index, $C_{\alpha\alpha}$		0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%
ratio of t2 / t1		8	8	8	8	8	8	8	8	8	8
Settlements											
Primary Settlement, (m / ft)		0.450	0.455	0.451	0.452	0.469	0.461	0.452	0.454	0.493	0.454
Secondary Settlement (m / ft)		0.019	0.019	0.019	0.019	0.019	0.019	0.019	0.019	0.025	0.019
Total Settlement (m / ft)		0.469	0.474	0.471	0.472	0.488	0.480	0.471	0.473	0.518	0.473
Elastic or Plastic (E/P)											
1-D		P	P	P	P	P	P	P	P	P	P
Settlement of Layer 15 (m / ft)		0.469	0.474	0.471	0.472	0.488	0.480	0.471	0.473	0.518	0.473
	Layer No.	16 Zone2-Above-GW-11									
	Initial Stress Reference Layer (top of layer)	6	6	6	6	6	6	6	6	6	6
	Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1
	Midpoint Elevation, (m / ft)	405.31	404.32	404.52	404.08	402.42	403.06	406.10	406.29	399.51	406.29
	Initial Effective Stress, σ'_i (kPa /psf)	2,026	2,026	2,028	2,026	2,024	2,026	2,026	2,026	2,584	2,026
	Final Effective Stress, σ'_f (kPa/psf)	4,963	5,014	4,980	4,992	5,162	5,080	4,990	5,007	5,571	5,006
Elastic Method											
Modulus, E (kPa/psf)=											
Strain											
Settlement (m / ft)											
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)		MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value		1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)		2,026	2,026	2,028	2,026	2,024	2,026	2,027	2,026	2,585	2,026
Modified Primary Compression Index, C_{cc}		0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460
Modified Recompression Index, C_{re}		0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014
Modified Secondary Compression Index, $C_{\alpha\alpha}$		0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%
ratio of t2 / t1		8	8	8	8	8	8	8	8	8	8
Settlements											
Primary Settlement, (m / ft)		0.421	0.426	0.423	0.424	0.440	0.432	0.424	0.425	0.460	0.425
Secondary Settlement (m / ft)		0.019	0.019	0.019	0.019	0.019	0.019	0.019	0.019	0.025	0.019
Total Settlement (m / ft)		0.441	0.445	0.442	0.443	0.459	0.451	0.443	0.445	0.485	0.445
Elastic or Plastic (E/P)											
1-D		P	P	P	P	P	P	P	P	P	P
Settlement of Layer 16 (m / ft)		0.441	0.445	0.442	0.443	0.459	0.451	0.443	0.445	0.485	0.445

Written by: **Yiwen Cao** Date: **12/17/2009** Reviewed by: **R. Kulasingam/Jay Beech** Date: **12/17/2009**

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

	Layer No.	17 Zone2-Above-GW-12									
	Initial Stress Reference Layer (top of layer)	6	6	6	6	6	6	6	6	6	6
	Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1
	Midpoint Elevation, (m / ft)	402.96	401.96	402.16	401.72	400.07	400.71	403.74	403.94	396.51	403.93
	Initial Effective Stress, σ'_i (kPa /psf)	2,219	2,219	2,221	2,219	2,217	2,219	2,219	2,219	2,831	2,219
	Final Effective Stress, σ'_f (kPa/psf)	5,156	5,207	5,173	5,185	5,355	5,273	5,183	5,200	5,817	5,199
Elastic Method											
Modulus, E (kPa/psf)=											
Strain											
Settlement (m / ft)											
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)		MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value		1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)		2,219	2,219	2,221	2,219	2,217	2,219	2,220	2,219	2,831	2,219
Modified Primary Compression Index, C_{cc}		0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460
Modified Recompression Index, C_{rc}		0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014
Modified Secondary Compression Index, $C_{\alpha\alpha}$		0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%
ratio of t2 / t1		8	8	8	8	8	8	8	8	8	8
Settlements											
Primary Settlement, (m / ft)		0.396	0.401	0.398	0.399	0.414	0.407	0.399	0.400	0.432	0.400
Secondary Settlement (m / ft)		0.019	0.019	0.019	0.019	0.019	0.019	0.019	0.019	0.025	0.019
Total Settlement (m / ft)		0.416	0.420	0.417	0.418	0.434	0.426	0.418	0.420	0.456	0.420
Elastic or Plastic (E/P)											
1-D		P	P	P	P	P	P	P	P	P	P
Settlement of Layer 17 (m / ft)		0.416	0.420	0.417	0.418	0.434	0.426	0.418	0.420	0.456	0.420
	Layer No.	18 Zone2-Above-GW-13									
	Initial Stress Reference Layer (top of layer)	6	6	6	6	6	6	6	6	6	6
	Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1
	Midpoint Elevation, (m / ft)	400.61	399.61	399.81	399.37	397.72	398.36	401.39	401.59	393.51	401.58
	Initial Effective Stress, σ'_i (kPa /psf)	2,412	2,412	2,414	2,412	2,409	2,412	2,412	2,412	3,077	2,412
	Final Effective Stress, σ'_f (kPa/psf)	5,349	5,400	5,366	5,378	5,548	5,466	5,375	5,393	6,063	5,392
Elastic Method											
Modulus, E (kPa/psf)=											
Strain											
Settlement (m / ft)											
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)		MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value		1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)		2,412	2,412	2,414	2,412	2,409	2,412	2,413	2,412	3,077	2,412
Modified Primary Compression Index, C_{cc}		0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460
Modified Recompression Index, C_{rc}		0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014
Modified Secondary Compression Index, $C_{\alpha\alpha}$		0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%
ratio of t2 / t1		8	8	8	8	8	8	8	8	8	8
Settlements											
Primary Settlement, (m / ft)		0.374	0.379	0.376	0.377	0.392	0.385	0.377	0.378	0.407	0.378
Secondary Settlement (m / ft)		0.019	0.019	0.019	0.019	0.019	0.019	0.019	0.019	0.025	0.019
Total Settlement (m / ft)		0.394	0.398	0.395	0.396	0.411	0.404	0.396	0.398	0.431	0.397
Elastic or Plastic (E/P)											
1-D		P	P	P	P	P	P	P	P	P	P
Settlement of Layer 18 (m / ft)		0.394	0.398	0.395	0.396	0.411	0.404	0.396	0.398	0.431	0.397
	Layer No.	19 Zone2-Above-GW-14									
	Initial Stress Reference Layer (top of layer)	6	6	6	6	6	6	6	6	6	6
	Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1
	Midpoint Elevation, (m / ft)	398.26	397.26	397.45	397.02	395.37	396.00	399.04	399.23	390.51	399.23
	Initial Effective Stress, σ'_i (kPa /psf)	2,605	2,605	2,607	2,605	2,602	2,604	2,605	2,605	3,323	2,605
	Final Effective Stress, σ'_f (kPa/psf)	5,542	5,593	5,559	5,571	5,740	5,659	5,568	5,586	6,309	5,585
Elastic Method											
Modulus, E (kPa/psf)=											
Strain											
Settlement (m / ft)											
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)		MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value		1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)		2,605	2,605	2,607	2,605	2,602	2,604	2,606	2,605	3,324	2,605
Modified Primary Compression Index, C_{cc}		0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460
Modified Recompression Index, C_{rc}		0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014
Modified Secondary Compression Index, $C_{\alpha\alpha}$		0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%
ratio of t2 / t1		8	8	8	8	8	8	8	8	8	8
Settlements											
Primary Settlement, (m / ft)		0.355	0.359	0.356	0.357	0.372	0.365	0.357	0.359	0.384	0.358
Secondary Settlement (m / ft)		0.019	0.019	0.019	0.019	0.019	0.019	0.019	0.019	0.025	0.019
Total Settlement (m / ft)		0.374	0.379	0.376	0.377	0.391	0.384	0.376	0.378	0.409	0.378
Elastic or Plastic (E/P)											
1-D		P	P	P	P	P	P	P	P	P	P
Settlement of Layer 19 (m / ft)		0.374	0.379	0.376	0.377	0.391	0.384	0.376	0.378	0.409	0.378

Written by: **Yiwen Cao** Date: **12/17/2009** Reviewed by: **R. Kulasingam/Jay Beech** Date: **12/17/2009**

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

Layer No.	20	Zone2-Above-GW-15								
Initial Stress Reference Layer (top of layer)	6	6	6	6	6	6	6	6	6	6
Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1
Midpoint Elevation, (m / ft)	395.90	394.90	395.10	394.66	393.02	393.65	396.68	396.88	387.50	396.87
Initial Effective Stress, σ'_i (kPa / psf)	2,798	2,798	2,800	2,798	2,795	2,797	2,798	2,798	3,569	2,798
Final Effective Stress, σ'_f (kPa/psf)	5,735	5,786	5,752	5,764	5,933	5,852	5,761	5,779	6,556	5,778
Elastic Method										
Modulus, E (kPa/psf)=										
Strain										
Settlement (m / ft)										
1-D Consolidation Theory (Plastic Method)										
Consolidation Properties										
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)	MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input										
Preconsolidation pressure, σ'_p (kPa / psf)	2,798	2,798	2,800	2,798	2,795	2,797	2,799	2,798	3,570	2,798
Modified Primary Compression Index, C_{cc}	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460
Modified Recompression Index, C_{re}	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014
Modified Secondary Compression Index, $C_{\alpha\alpha}$	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%
ratio of t_2 / t_1	8	8	8	8	8	8	8	8	8	8
Settlements										
Primary Settlement, (m / ft)	0.337	0.342	0.339	0.340	0.354	0.347	0.339	0.341	0.365	0.341
Secondary Settlement (m / ft)	0.019	0.019	0.019	0.019	0.019	0.019	0.019	0.019	0.025	0.019
Total Settlement (m / ft)	0.357	0.361	0.358	0.359	0.373	0.366	0.359	0.360	0.389	0.360
Elastic or Plastic (E/P)										
1-D	P	P	P	P	P	P	P	P	P	P
Settlement of Layer 20 (m / ft)	0.357	0.361	0.358	0.359	0.373	0.366	0.359	0.360	0.389	0.360
Layer No.	21	Zone2-Above-GW-16								
Initial Stress Reference Layer (top of layer)	6	6	6	6	6	6	6	6	6	6
Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1
Midpoint Elevation, (m / ft)	393.55	392.55	392.74	392.31	390.67	391.30	394.33	394.53	384.50	394.52
Initial Effective Stress, σ'_i (kPa / psf)	2,991	2,991	2,993	2,991	2,987	2,990	2,991	2,990	3,815	2,991
Final Effective Stress, σ'_f (kPa/psf)	5,928	5,979	5,945	5,957	6,126	6,045	5,954	5,972	6,802	5,971
Elastic Method										
Modulus, E (kPa/psf)=										
Strain										
Settlement (m / ft)										
1-D Consolidation Theory (Plastic Method)										
Consolidation Properties										
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)	MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input										
Preconsolidation pressure, σ'_p (kPa / psf)	2,991	2,991	2,993	2,991	2,987	2,990	2,992	2,991	3,816	2,991
Modified Primary Compression Index, C_{cc}	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460
Modified Recompression Index, C_{re}	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014
Modified Secondary Compression Index, $C_{\alpha\alpha}$	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%
ratio of t_2 / t_1	8	8	8	8	8	8	8	8	8	8
Settlements										
Primary Settlement, (m / ft)	0.322	0.326	0.323	0.324	0.337	0.331	0.324	0.325	0.347	0.325
Secondary Settlement (m / ft)	0.019	0.019	0.019	0.019	0.019	0.019	0.019	0.019	0.025	0.019
Total Settlement (m / ft)	0.341	0.345	0.342	0.343	0.357	0.350	0.343	0.344	0.371	0.344
Elastic or Plastic (E/P)										
1-D	P	P	P	P	P	P	P	P	P	P
Settlement of Layer 21 (m / ft)	0.341	0.345	0.342	0.343	0.357	0.350	0.343	0.344	0.371	0.344
Layer No.	22	Zone2-Above-GW-17								
Initial Stress Reference Layer (top of layer)	6	6	6	6	6	6	6	6	6	6
Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1
Midpoint Elevation, (m / ft)	391.20	390.20	390.39	389.96	388.32	388.95	391.98	392.18	381.50	392.17
Initial Effective Stress, σ'_i (kPa / psf)	3,184	3,184	3,186	3,184	3,180	3,183	3,184	3,183	4,061	3,184
Final Effective Stress, σ'_f (kPa/psf)	6,121	6,172	6,138	6,150	6,319	6,238	6,147	6,165	7,048	6,164
Elastic Method										
Modulus, E (kPa/psf)=										
Strain										
Settlement (m / ft)										
1-D Consolidation Theory (Plastic Method)										
Consolidation Properties										
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)	MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input										
Preconsolidation pressure, σ'_p (kPa / psf)	3,184	3,184	3,186	3,184	3,180	3,183	3,185	3,184	4,062	3,184
Modified Primary Compression Index, C_{cc}	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460
Modified Recompression Index, C_{re}	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014
Modified Secondary Compression Index, $C_{\alpha\alpha}$	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%
ratio of t_2 / t_1	8	8	8	8	8	8	8	8	8	8
Settlements										
Primary Settlement, (m / ft)	0.307	0.311	0.308	0.309	0.322	0.316	0.309	0.311	0.330	0.311
Secondary Settlement (m / ft)	0.019	0.019	0.019	0.019	0.019	0.019	0.019	0.019	0.025	0.019
Total Settlement (m / ft)	0.327	0.330	0.328	0.329	0.342	0.336	0.329	0.330	0.355	0.330
Elastic or Plastic (E/P)										
1-D	P	P	P	P	P	P	P	P	P	P
Settlement of Layer 22 (m / ft)	0.327	0.330	0.328	0.329	0.342	0.336	0.329	0.330	0.355	0.330

Written by: **Yiwen Cao** Date: **12/17/2009** Reviewed by: **R. Kulasingam/Jay Beech** Date: **12/17/2009**

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

Layer No.	23	Zone3-Above-GW-1								
Initial Stress Reference Layer (top of layer)	6	6	6	6	6	6	6	6	6	6
Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1
Midpoint Elevation, (m / ft)	390.02	389.02	389.21	388.78	387.14	387.77	390.80	391.00	380.00	390.99
Initial Effective Stress, σ'_i (kPa / psf)	3,280	3,280	3,283	3,280	3,277	3,280	3,280	3,280	4,184	3,281
Final Effective Stress, σ'_f (kPa/psf)	6,218	6,268	6,235	6,246	6,415	6,334	6,244	6,261	7,171	6,260
Elastic Method										
Modulus, E (kPa/psf)=										
Strain										
Settlement (m / ft)										
1-D Consolidation Theory (Plastic Method)										
Consolidation Properties										
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)	MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input										
Preconsolidation pressure, σ'_p (kPa / psf)	3,280	3,280	3,283	3,280	3,277	3,280	3,281	3,280	4,185	3,281
Modified Primary Compression Index, C_{cc}	0.380	0.380	0.380	0.380	0.380	0.380	0.380	0.380	0.380	0.380
Modified Recompression Index, C_{re}	0.021	0.021	0.021	0.021	0.021	0.021	0.021	0.021	0.021	0.021
Modified Secondary Compression Index, $C_{\alpha\alpha}$	0.70%	0.70%	0.70%	0.70%	0.70%	0.70%	0.70%	0.70%	0.70%	0.70%
ratio of t2 / t1	8	8	8	8	8	8	8	8	8	8
Settlements										
Primary Settlement, (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Secondary Settlement (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Total Settlement (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Elastic or Plastic (E/P)	P	P	P	P	P	P	P	P	P	P
1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D
Settlement of Layer 23 (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Layer No.	24	Zone3-Above-GW-2								
Initial Stress Reference Layer (top of layer)	6	6	6	6	6	6	6	6	6	6
Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1
Midpoint Elevation, (m / ft)	390.02	389.02	389.21	388.78	387.14	387.77	390.80	391.00	380.00	390.99
Initial Effective Stress, σ'_i (kPa /psf)	3,280	3,280	3,283	3,280	3,277	3,280	3,280	3,280	4,184	3,281
Final Effective Stress, σ'_f (kPa/psf)	6,218	6,268	6,235	6,246	6,415	6,334	6,244	6,261	7,171	6,260
Elastic Method										
Modulus, E (kPa/psf)=										
Strain										
Settlement (m / ft)										
1-D Consolidation Theory (Plastic Method)										
Consolidation Properties										
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)	MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input										
Preconsolidation pressure, σ'_p (kPa / psf)	3,280	3,280	3,283	3,280	3,277	3,280	3,281	3,280	4,185	3,281
Modified Primary Compression Index, C_{cc}	0.380	0.380	0.380	0.380	0.380	0.380	0.380	0.380	0.380	0.380
Modified Recompression Index, C_{re}	0.021	0.021	0.021	0.021	0.021	0.021	0.021	0.021	0.021	0.021
Modified Secondary Compression Index, $C_{\alpha\alpha}$	0.70%	0.70%	0.70%	0.70%	0.70%	0.70%	0.70%	0.70%	0.70%	0.70%
ratio of t2 / t1	8	8	8	8	8	8	8	8	8	8
Settlements										
Primary Settlement, (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Secondary Settlement (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Total Settlement (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Elastic or Plastic (E/P)	P	P	P	P	P	P	P	P	P	P
1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D
Settlement of Layer 24 (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Layer No.	25	Zone2-Below-GW-18								
Initial Stress Reference Layer (top of layer)	6	6	6	6	6	6	6	6	6	6
Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1
Midpoint Elevation, (m / ft)	386.27	385.52	385.66	385.34	384.11	384.58	386.85	388.25	380.00	388.24
Initial Effective Stress, σ'_i (kPa /psf)	3,353.78	3,349.03	3,352.55	3,347.87	3,336.09	3,342.23	3,357.79	3,333.73	4,184.32	3,334.57
Final Effective Stress, σ'_f (kPa/psf)	6,291.11	6,336.82	6,304.56	6,313.76	6,474.50	6,396.78	6,321.25	6,315.09	7,170.96	6,314.02
Elastic Method										
Modulus, E (kPa/psf)=										
Strain										
Settlement (m / ft)										
1-D Consolidation Theory (Plastic Method)										
Consolidation Properties										
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)	MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input										
Preconsolidation pressure, σ'_p (kPa / psf)	3,588	3,568	3,574	3,563	3,525	3,541	3,605	3,506	4,185	3,506
Modified Primary Compression Index, C_{cc}	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460
Modified Recompression Index, C_{re}	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014
Modified Secondary Compression Index, $C_{\alpha\alpha}$	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%
ratio of t2 / t1	8	8	8	8	8	8	8	8	8	8
Settlements										
Primary Settlement, (m / ft)	0.846	0.807	0.808	0.790	0.739	0.756	0.890	0.648	0.000	0.647
Secondary Settlement (m / ft)	0.062	0.058	0.058	0.057	0.050	0.052	0.065	0.045	0.000	0.045
Total Settlement (m / ft)	0.907	0.865	0.867	0.847	0.789	0.809	0.955	0.694	0.000	0.693
Elastic or Plastic (E/P)										
1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D
Settlement of Layer 25 (m / ft)	0.907	0.865	0.867	0.847	0.789	0.809	0.955	0.694	0.000	0.693

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: Honeywell Project: Onondaga Lake SCA Final Design Project/ Proposal No.: GJ4299 Task No.: 04

	Layer No.	26 Zone2-Below-GW-19									
	Initial Stress Reference Layer (top of layer)	6	6	6	6	6	6	6	6	6	
	Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	
	Midpoint Elevation, (m / ft)	378.76	378.51	378.55	378.45	378.04	378.19	378.95	382.75	380.00	382.75
	Initial Effective Stress, σ'_i (kPa / psf)	3,500.97	3,486.42	3,491.81	3,482.92	3,455.06	3,467.37	3,512.63	3,441.53	4,184.32	3,442.27
	Final Effective Stress, σ'_f (kPa/psf)	6,438.31	6,474.22	6,443.82	6,448.80	6,593.47	6,521.93	6,476.09	6,422.89	7,170.96	6,421.72
Elastic Method											
Modulus, E (kPa/psf)=											
Strain											
Settlement (m / ft)											
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)		MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value		1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)		4,204	4,143	4,157	4,128	4,023	4,065	4,253	3,957	4,185	3,957
Modified Primary Compression Index, C_{cc}		0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460
Modified Recompression Index, C_{re}		0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014
Modified Secondary Compression Index, $C_{\alpha\alpha}$		0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%
ratio of t_2 / t_1		8	8	8	8	8	8	8	8	8	8
Settlements											
Primary Settlement, (m / ft)		0.648	0.633	0.630	0.621	0.605	0.609	0.673	0.537	0.000	0.536
Secondary Settlement (m / ft)		0.062	0.058	0.058	0.057	0.050	0.052	0.065	0.045	0.000	0.045
Total Settlement (m / ft)		0.710	0.690	0.688	0.678	0.655	0.662	0.738	0.582	0.000	0.581
Elastic or Plastic (E/P)											
Settlement of Layer 26 (m / ft)		1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D
		0.710	0.690	0.688	0.678	0.655	0.662	0.738	0.582	0.000	0.581
	Layer No.	27 Zone3-Below-GW-3									
	Initial Stress Reference Layer (top of layer)	6	6	6	6	6	6	6	6	6	
	Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	
	Midpoint Elevation, (m / ft)	365.35	368.04	365.65	366.13	368.81	366.67	365.00	380.00	380.00	380.00
	Initial Effective Stress, σ'_i (kPa / psf)	3,763.71	3,691.63	3,744.79	3,724.29	3,635.97	3,693.22	3,786.05	3,495.43	4,184.32	3,496.13
	Final Effective Stress, σ'_f (kPa/psf)	6,701.05	6,679.43	6,696.81	6,690.18	6,774.38	6,747.77	6,749.51	6,476.79	7,170.96	6,475.57
Elastic Method											
Modulus, E (kPa/psf)=											
Strain											
Settlement (m / ft)											
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)		MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value		1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)		4,701	4,566	4,631	4,584	4,394	4,490	4,773	4,182	4,185	4,182
Modified Primary Compression Index, C_{cc}		0.380	0.380	0.380	0.380	0.380	0.380	0.380	0.380	0.380	0.380
Modified Recompression Index, C_{re}		0.021	0.021	0.021	0.021	0.021	0.021	0.021	0.021	0.021	0.021
Modified Secondary Compression Index, $C_{\alpha\alpha}$		0.70%	0.70%	0.70%	0.70%	0.70%	0.70%	0.70%	0.70%	0.70%	0.70%
ratio of t_2 / t_1		8	8	8	8	8	8	8	8	8	8
Settlements											
Primary Settlement, (m / ft)		1.168	0.901	1.175	1.140	0.907	1.150	1.186	0.000	0.000	0.000
Secondary Settlement (m / ft)		0.122	0.088	0.118	0.112	0.078	0.105	0.126	0.000	0.000	0.000
Total Settlement (m / ft)		1.290	0.989	1.293	1.253	0.985	1.255	1.313	0.000	0.000	0.000
Elastic or Plastic (E/P)											
Settlement of Layer 27 (m / ft)		1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D
		1.290	0.989	1.293	1.253	0.985	1.255	1.313	0.000	0.000	0.000

Written by: **Yiwen Cao** Date: **12/17/2009** Reviewed by: **R. Kulasingam/Jay Beech** Date: **12/17/2009**

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

[illegible]

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

Attachment 3

**CASE 2: Settlement Analysis for Top of Dredge Material in Geo-tubes at
the End of the Operations Period (i.e., End of Year 4)
(Points 1001 to 1010)**

Written by: **Yiwen Cao** Date: **12/17/2009** Reviewed by: **R. Kulasingam/Jay Beech** Date: **12/17/2009**

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

Settlement Prediction Model													
Programmer: Yiwen Cao, GeoSyntec Consultants													
Version Control V 1.002 11.14.2007													
Project: Onondaga Lake SCA Final													
Notes:													
Unit: ft / psf													
Average Compaction Effort = 1440.00 kPa or psf													
Consider Compaction Effort = N yes or no													
Point #				1001	1002	1003	1004	1005	1006	1007	1008	1009	1010
Distance (meter or ft)				0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
ELEVATION (M / FT)	Line 1	Top of Year 4 Dredge		463.00	462.42	462.35	462.00	461.75	461.72	464.00	464.34	464.42	464.33
	Line 2	Top of Year 4 Dredge		463.00	462.42	462.35	462.00	461.75	461.72	464.00	464.34	464.42	464.33
	Line 3			463.00	462.42	462.35	462.00	461.75	461.72	464.00	464.34	464.42	464.33
	Line 4			463.00	462.42	462.35	462.00	461.75	461.72	464.00	464.34	464.42	464.33
	Line 5			463.00	462.42	462.35	462.00	461.75	461.72	464.00	464.34	464.42	464.33
	Line 6			463.00	462.42	462.35	462.00	461.75	461.72	464.00	464.34	464.42	464.33
	Line 7			463.00	462.42	462.35	462.00	461.75	461.72	464.00	464.34	464.42	464.33
	Line 8	Top of Year 3 Dredge		463.00	462.42	462.35	462.00	461.75	461.72	464.00	464.34	464.42	464.33
	Line 9			461.29	460.71	460.63	460.29	460.04	460.01	462.29	462.63	462.70	462.61
	Line 10			459.57	458.99	458.92	458.57	458.32	458.29	460.57	460.91	460.99	460.90
	Line 11			457.86	457.28	457.20	456.86	456.61	456.58	458.86	459.20	459.27	459.18
	Line 12			456.14	455.57	455.49	455.14	454.89	454.86	457.14	457.49	457.56	457.47
	Line 13			454.43	453.85	453.77	453.43	453.18	453.15	455.43	455.77	455.85	455.76
	Line 14			452.71	452.14	452.06	451.71	451.47	451.43	453.71	454.06	454.13	454.04
	Line 15	Top of Year 2 Dredge		451.00	450.42	450.35	450.00	449.75	449.72	452.00	452.34	452.42	452.33
	Line 16			451.00	450.42	450.35	450.00	449.75	449.72	450.34	449.77	449.85	449.76
	Line 17			451.00	450.42	450.35	450.00	449.75	449.72	448.68	447.20	447.27	447.18
	Line 18			451.00	450.42	450.35	450.00	449.75	449.72	447.03	444.63	444.70	444.61
	Line 19			451.00	450.42	450.35	450.00	449.75	449.72	445.37	442.06	442.13	442.04
	Line 20			451.00	450.42	450.35	450.00	449.75	449.72	443.71	439.49	439.56	439.47
	Line 21			451.00	450.42	450.35	450.00	449.75	449.72	442.05	436.91	436.99	436.90
	Line 22	Top of Year 1 Dredge		451.00	450.42	450.35	450.00	449.75	449.72	440.39	434.34	434.42	434.33
	Line 23			448.00	447.42	447.35	447.00	446.75	446.72	439.33	434.34	434.42	434.33
	Line 24			445.00	444.42	444.35	444.00	443.75	443.72	438.26	434.34	434.42	434.33
	Line 25			442.00	441.42	441.35	441.00	440.75	440.72	437.20	434.34	434.42	434.33
	Line 26			439.00	438.42	438.35	438.00	437.75	437.72	436.13	434.34	434.42	434.33
	Line 27			436.00	435.42	435.35	435.00	434.75	434.72	433.07	434.34	434.42	434.33
	Line 28	Top of Gravel/Top of Incompressible		433.00	432.42	432.35	432.00	431.75	431.72	434.00	434.34	434.42	434.33
	Line 29	GND for sigma p		430.02	429.02	429.25	428.78	427.10	427.77	430.81	431.00	431.04	431.00
	Line 30	GW		375.00	375.00	375.00	375.00	375.00	375.00	375.00	375.00	375.00	375.00
	Line 31	ROCK		355.70	361.07	356.29	357.26	362.61	358.34	355.00	380.00	380.00	380.00
LAYER THICKNESS (M / FT)	Layer No.	From	To	Material									
	1	1	2	Null Layer	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	2	2	3	YR4-1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3	3	4	YR4-2	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4	4	5	YR4-3	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5	5	6	YR4-4	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6	6	7	YR4-5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	7	7	8	YR4-6	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	8	8	9	YR3-1	1.71	1.71	1.71	1.71	1.71	1.71	1.71	1.71	1.71
	9	9	10	YR3-2	1.71	1.71	1.71	1.71	1.71	1.71	1.71	1.71	1.71
	10	10	11	YR3-3	1.71	1.71	1.71	1.71	1.71	1.71	1.71	1.71	1.71
	11	11	12	YR3-4	1.71	1.71	1.71	1.71	1.71	1.71	1.71	1.71	1.71
	12	12	13	YR3-5	1.71	1.71	1.71	1.71	1.71	1.71	1.71	1.71	1.71
	13	13	14	YR3-6	1.71	1.71	1.71	1.71	1.71	1.71	1.71	1.71	1.71
	14	14	15	YR3-7	1.71	1.71	1.71	1.71	1.71	1.71	1.71	1.71	1.71
	15	15	16	YR2-1	0.00	0.00	0.00	0.00	0.00	1.66	2.57	2.57	2.57
	16	16	17	YR2-2	0.00	0.00	0.00	0.00	0.00	1.66	2.57	2.57	2.57
	17	17	18	YR2-3	0.00	0.00	0.00	0.00	0.00	1.66	2.57	2.57	2.57
	18	18	19	YR2-4	0.00	0.00	0.00	0.00	0.00	1.66	2.57	2.57	2.57
	19	19	20	YR2-5	0.00	0.00	0.00	0.00	0.00	1.66	2.57	2.57	2.57
	20	20	21	YR2-6	0.00	0.00	0.00	0.00	0.00	1.66	2.57	2.57	2.57
	21	21	22	YR2-7	0.00	0.00	0.00	0.00	0.00	1.66	2.57	2.57	2.57
	22	22	23	YR1-1	3.00	3.00	3.00	3.00	3.00	3.00	1.07	0.00	0.00
	23	23	24	YR1-2	3.00	3.00	3.00	3.00	3.00	3.00	1.07	0.00	0.00
	24	24	25	YR1-3	3.00	3.00	3.00	3.00	3.00	3.00	1.07	0.00	0.00
	25	25	26	YR1-4	3.00	3.00	3.00	3.00	3.00	3.00	1.07	0.00	0.00
	26	26	27	YR1-5	3.00	3.00	3.00	3.00	3.00	3.00	1.07	0.00	0.00
	27	27	28	YR1-6	3.00	3.00	3.00	3.00	3.00	3.00	1.07	0.00	0.00
	28												
	29												
	30												
	Thickness Check												
		From Line	To Line	SUM	30.00	30.00	30.00	30.00	30.00	30.00	30.00	30.00	30.00
		1	28	Thickness =	30.00	30.00	30.00	30.00	30.00	30.00	30.00	30.00	30.00
				Thickness Check	OK	OK	OK	OK	OK	OK	OK	OK	OK

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: Honeywell Project: Onondaga Lake SCA Final Design Project/ Proposal No.: GJ4299 Task No.: 04

UNIT WEIGHT	Layer No.	Material										
	1	Null Layer	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	2	YR4-1	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	3	YR4-2	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	4	YR4-3	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	5	YR4-4	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	6	YR4-5	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	7	YR4-6	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	8	YR3-1	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	9	YR3-2	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	10	YR3-3	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	11	YR3-4	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	12	YR3-5	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	13	YR3-6	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	14	YR3-7	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	15	YR2-1	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	16	YR2-2	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	17	YR2-3	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	18	YR2-4	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	19	YR2-5	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	20	YR2-6	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	21	YR2-7	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	22	YR1-1	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	23	YR1-2	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	24	YR1-3	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	25	YR1-4	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	26	YR1-5	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	27	YR1-6	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	28											
	29		82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	30	Soil below GW	19.6	19.6	19.6	19.6	19.6	19.6	19.6	19.6	19.6	19.6
	Layer No.	1 Null Layer										
		Initial Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1
		Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1
		Midpoint Elevation, (m / ft)	463.00	462.42	462.35	462.00	461.75	461.72	464.00	464.34	464.42	464.33
		Initial Effective Stress, σ'_i (kPa / psf)	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight
Elastic Method		Final Effective Stress, σ'_f (kPa/psf)	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight
Modulus, E (kPa/psf)=			Strain									
			Settlement (m / ft)									
1-D Consolidation Theory (Plastic Method)												
Consolidation Properties												
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)												
OCR Manual Input Value												
OCR Computation Input												
Preconsolidation pressure, σ'_p (kPa / psf)												
Modified Primary Compression Index, C_{ce}												
Modified Recompression Index, C_{re}												
Modified Secondary Compression Index, C_{α}												
ratio of t_2 / t_1												
Settlements												
Primary Settlement, (m / ft)												
Secondary Settlement (m / ft)												
Total Settlement (m / ft)												
Elastic or Plastic (E/P)												
Settlement of Layer 1 (m / ft)												

Written by: **Yiwen Cao** Date: **12/17/2009** Reviewed by: **R. Kulasingam/Jay Beech** Date: **12/17/2009**

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

	Layer No. 2	YR4-1								
	Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2
	Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1
	Midpoint Elevation, (m / ft)	463.00	462.42	462.35	462.00	461.75	461.72	464.00	464.34	464.33
	Initial Effective Stress, σ'_i (kPa /psf)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Final Effective Stress, σ'_f (kPa/psf)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Elastic Method										
Modulus, E (kPa/psf)=		Strain								
		Settlement (m / ft)								
1-D Consolidation Theory (Plastic Method)										
Consolidation Properties										
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)		MW	MW	MW	MW	MW	MW	MW	MW	MW
OCR Manual Input Value		1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input										
Preconsolidation pressure, σ'_p (kPa / psf)		0	0	0	0	0	0	0	0	0
Modified Primary Compression Index, C_{cc}		0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291
Modified Recompression Index, C_{re}		0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005
Modified Secondary Compression Index, $C_{\alpha\alpha}$		0.08%	0.08%	0.08%	0.08%	0.08%	0.08%	0.08%	0.08%	0.08%
ratio of t_2 / t_1		2	2	2	2	2	2	2	2	2
Settlements										
Primary Settlement, (m / ft)		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Secondary Settlement (m / ft)		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Total Settlement (m / ft)		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Elastic or Plastic (E/P)		P	P	P	P	P	P	P	P	P
Settlement of Layer 2 (m / ft)		1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D
		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	Layer No. 3	YR4-2								
	Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2
	Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1
	Midpoint Elevation, (m / ft)	463.00	462.42	462.35	462.00	461.75	461.72	464.00	464.34	464.33
	Initial Effective Stress, σ'_i (kPa /psf)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Final Effective Stress, σ'_f (kPa/psf)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Elastic Method										
Modulus, E (kPa/psf)=		Strain								
		Settlement (m / ft)								
1-D Consolidation Theory (Plastic Method)										
Consolidation Properties										
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)		MW	MW	MW	MW	MW	MW	MW	MW	MW
OCR Manual Input Value		1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input										
Preconsolidation pressure, σ'_p (kPa / psf)		0	0	0	0	0	0	0	0	0
Modified Primary Compression Index, C_{cc}		0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291
Modified Recompression Index, C_{re}		0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005
Modified Secondary Compression Index, $C_{\alpha\alpha}$		0.08%	0.08%	0.08%	0.08%	0.08%	0.08%	0.08%	0.08%	0.08%
ratio of t_2 / t_1		2	2	2	2	2	2	2	2	2
Settlements										
Primary Settlement, (m / ft)		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Secondary Settlement (m / ft)		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Total Settlement (m / ft)		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Elastic or Plastic (E/P)		P	P	P	P	P	P	P	P	P
Settlement of Layer 3 (m / ft)		1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D
		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	Layer No. 4	YR4-3								
	Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2
	Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1
	Midpoint Elevation, (m / ft)	463.00	462.42	462.35	462.00	461.75	461.72	464.00	464.34	464.33
	Initial Effective Stress, σ'_i (kPa /psf)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Final Effective Stress, σ'_f (kPa/psf)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Elastic Method										
Modulus, E (kPa/psf)=		Strain								
		Settlement (m / ft)								
1-D Consolidation Theory (Plastic Method)										
Consolidation Properties										
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)		MW	MW	MW	MW	MW	MW	MW	MW	MW
OCR Manual Input Value		1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input										
Preconsolidation pressure, σ'_p (kPa / psf)		0	0	0	0	0	0	0	0	0
Modified Primary Compression Index, C_{cc}		0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291
Modified Recompression Index, C_{re}		0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005
Modified Secondary Compression Index, $C_{\alpha\alpha}$		0.08%	0.08%	0.08%	0.08%	0.08%	0.08%	0.08%	0.08%	0.08%
ratio of t_2 / t_1		2	2	2	2	2	2	2	2	2
Settlements										
Primary Settlement, (m / ft)		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Secondary Settlement (m / ft)		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Total Settlement (m / ft)		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Elastic or Plastic (E/P)		P	P	P	P	P	P	P	P	P
Settlement of Layer 4 (m / ft)		1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D
		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: Honeywell Project: Onondaga Lake SCA Final Design Project/ Proposal No.: GJ4299 Task No.: 04

	Layer No. 5	YR4-4								
	Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2
	Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1
	Midpoint Elevation, (m / ft)	463.00	462.42	462.35	462.00	461.75	461.72	464.00	464.34	464.42
	Initial Effective Stress, σ'_i (kPa /psf)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Final Effective Stress, σ'_f (kPa/psf)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Elastic Method										
Modulus, E (kPa/psf)=		Strain								
		Settlement (m / ft)								
1-D Consolidation Theory (Plastic Method)										
Consolidation Properties										
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)		MW	MW	MW	MW	MW	MW	MW	MW	MW
OCR Manual Input Value		1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input										
Preconsolidation pressure, σ'_p (kPa / psf)		0	0	0	0	0	0	0	0	0
Modified Primary Compression Index, C_{cc}		0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291
Modified Recompression Index, C_{re}		0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005
Modified Secondary Compression Index, $C_{\alpha\alpha}$		0.08%	0.08%	0.08%	0.08%	0.08%	0.08%	0.08%	0.08%	0.08%
ratio of t_2 / t_1		2	2	2	2	2	2	2	2	2
Settlements										
Primary Settlement, (m / ft)		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Secondary Settlement (m / ft)		0.00000	0.00000	0.00000	0.00000	0.00000	0.00000	0.00000	0.00000	0.00000
Total Settlement (m / ft)		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Elastic or Plastic (E/P)		P	P	P	P	P	P	P	P	P
Settlement of Layer 5 (m / ft)		1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D
		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	Layer No. 6	YR4-5								
	Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2
	Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1
	Midpoint Elevation, (m / ft)	463.00	462.42	462.35	462.00	461.75	461.72	464.00	464.34	464.42
	Initial Effective Stress, σ'_i (kPa /psf)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Final Effective Stress, σ'_f (kPa/psf)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Elastic Method										
Modulus, E (kPa/psf)=		Strain								
		Settlement (m / ft)								
1-D Consolidation Theory (Plastic Method)										
Consolidation Properties										
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)		MW	MW	MW	MW	MW	MW	MW	MW	MW
OCR Manual Input Value		1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input										
Preconsolidation pressure, σ'_p (kPa / psf)		0	0	0	0	0	0	0	0	0
Modified Primary Compression Index, C_{cc}		0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291
Modified Recompression Index, C_{re}		0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005
Modified Secondary Compression Index, $C_{\alpha\alpha}$		0.08%	0.08%	0.08%	0.08%	0.08%	0.08%	0.08%	0.08%	0.08%
ratio of t_2 / t_1		2	2	2	2	2	2	2	2	2
Settlements										
Primary Settlement, (m / ft)		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Secondary Settlement (m / ft)		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Total Settlement (m / ft)		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Elastic or Plastic (E/P)		P	P	P	P	P	P	P	P	P
Settlement of Layer 6 (m / ft)		1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D
		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	Layer No. 7	YR4-6								
	Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2
	Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1
	Midpoint Elevation, (m / ft)	463.00	462.42	462.35	462.00	461.75	461.72	464.00	464.34	464.42
	Initial Effective Stress, σ'_i (kPa /psf)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Final Effective Stress, σ'_f (kPa/psf)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Elastic Method										
Modulus, E (kPa/psf)=		Strain								
		Settlement (m / ft)								
1-D Consolidation Theory (Plastic Method)										
Consolidation Properties										
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)		MW	MW	MW	MW	MW	MW	MW	MW	MW
OCR Manual Input Value		1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input										
Preconsolidation pressure, σ'_p (kPa / psf)		0	0	0	0	0	0	0	0	0
Modified Primary Compression Index, C_{cc}		0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291
Modified Recompression Index, C_{re}		0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005
Modified Secondary Compression Index, $C_{\alpha\alpha}$		0.08%	0.08%	0.08%	0.08%	0.08%	0.08%	0.08%	0.08%	0.08%
ratio of t_2 / t_1		2	2	2	2	2	2	2	2	2
Settlements										
Primary Settlement, (m / ft)		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Secondary Settlement (m / ft)		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Total Settlement (m / ft)		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Elastic or Plastic (E/P)		P	P	P	P	P	P	P	P	P
Settlement of Layer 7 (m / ft)		1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D
		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000

Written by: **Yiwen Cao** Date: **12/17/2009** Reviewed by: **R. Kulasingam/Jay Beech** Date: **12/17/2009**

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

	Layer No. 8	YR3-1											
	Initial Stress Reference Layer (top of layer)			8	8	8	8	8	8	8	8		
	Final Stress Reference Layer (top of layer)			1	1	1	1	1	1	1	1		
	Midpoint Elevation, (m / ft)			462.14	461.57	461.49	461.14	460.89	460.86	463.14	463.49	463.56	463.47
	Initial Effective Stress, σ'_i (kPa /psf)			73.71	73.71	73.71	73.71	73.71	73.71	73.71	73.71	73.71	73.71
	Final Effective Stress, σ'_f (kPa/psf)			73.71	73.71	73.71	73.71	73.71	73.71	73.71	73.71	73.71	73.71
Elastic Method													
Modulus, E (kPa/psf)=													
			Strain										
			Settlement (m / ft)										
1-D Consolidation Theory (Plastic Method)													
Consolidation Properties													
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)				MW	MW	MW	MW	MW	MW	MW	MW	MW	
OCR Manual Input Value				1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	
OCR Computation Input													
Preconsolidation pressure, σ'_p (kPa / psf)				74	74	74	74	74	74	74	74	74	
Modified Primary Compression Index, C_{cc}				0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	
Modified Recompression Index, C_{rc}				0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	
Modified Secondary Compression Index, $C_{\alpha\alpha}$				0.08%	0.08%	0.08%	0.08%	0.08%	0.08%	0.08%	0.08%	0.08%	
ratio of t2 / t1				4	4	4	4	4	4	4	4	4	
Settlements													
Primary Settlement, (m / ft)				0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	
Secondary Settlement (m / ft)				0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	
Total Settlement (m / ft)				0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	
Elastic or Plastic (E/P)				P	P	P	P	P	P	P	P	P	
Settlement of Layer 8 (m / ft)				1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	
				0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	
	Layer No. 9	YR3-2											
	Initial Stress Reference Layer (top of layer)			8	8	8	8	8	8	8	8		
	Final Stress Reference Layer (top of layer)			1	1	1	1	1	1	1	1		
	Midpoint Elevation, (m / ft)			460.43	459.85	459.77	459.43	459.18	459.15	461.43	461.77	461.85	461.76
	Initial Effective Stress, σ'_i (kPa /psf)			221.14	221.14	221.14	221.14	221.14	221.14	221.14	221.14	221.14	
	Final Effective Stress, σ'_f (kPa/psf)			221.14	221.14	221.14	221.14	221.14	221.14	221.14	221.14	221.14	
Elastic Method													
Modulus, E (kPa/psf)=													
			Strain										
			Settlement (m / ft)										
1-D Consolidation Theory (Plastic Method)													
Consolidation Properties													
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)				MW	MW	MW	MW	MW	MW	MW	MW	MW	
OCR Manual Input Value				1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	
OCR Computation Input													
Preconsolidation pressure, σ'_p (kPa / psf)				221	221	221	221	221	221	221	221	221	
Modified Primary Compression Index, C_{cc}				0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	
Modified Recompression Index, C_{rc}				0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	
Modified Secondary Compression Index, $C_{\alpha\alpha}$				0.08%	0.08%	0.08%	0.08%	0.08%	0.08%	0.08%	0.08%	0.08%	
ratio of t2 / t1				4	4	4	4	4	4	4	4	4	
Settlements													
Primary Settlement, (m / ft)				0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	
Secondary Settlement (m / ft)				0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	
Total Settlement (m / ft)				0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	
Elastic or Plastic (E/P)				P	P	P	P	P	P	P	P	P	
Settlement of Layer 9 (m / ft)				1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	
				0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	
	Layer No. 10	YR3-3											
	Initial Stress Reference Layer (top of layer)			8	8	8	8	8	8	8	8		
	Final Stress Reference Layer (top of layer)			1	1	1	1	1	1	1	1		
	Midpoint Elevation, (m / ft)			458.71	458.14	458.06	457.71	457.47	457.43	459.71	460.06	460.13	460.04
	Initial Effective Stress, σ'_i (kPa /psf)			368.57	368.57	368.57	368.57	368.57	368.57	368.57	368.57	368.57	
	Final Effective Stress, σ'_f (kPa/psf)			368.57	368.57	368.57	368.57	368.57	368.57	368.57	368.57	368.57	
Elastic Method													
Modulus, E (kPa/psf)=													
			Strain										
			Settlement (m / ft)										
1-D Consolidation Theory (Plastic Method)													
Consolidation Properties													
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)				MW	MW	MW	MW	MW	MW	MW	MW	MW	
OCR Manual Input Value				1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	
OCR Computation Input													
Preconsolidation pressure, σ'_p (kPa / psf)				369	369	369	369	369	369	369	369	369	
Modified Primary Compression Index, C_{cc}				0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	
Modified Recompression Index, C_{rc}				0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	
Modified Secondary Compression Index, $C_{\alpha\alpha}$				0.08%	0.08%	0.08%	0.08%	0.08%	0.08%	0.08%	0.08%	0.08%	
ratio of t2 / t1				4	4	4	4	4	4	4	4	4	
Settlements													
Primary Settlement, (m / ft)				0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	
Secondary Settlement (m / ft)				0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	
Total Settlement (m / ft)				0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	
Elastic or Plastic (E/P)				P	P	P	P	P	P	P	P	P	
Settlement of Layer 10 (m / ft)				1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	
				0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	

Written by: **Yiwen Cao** Date: **12/17/2009** Reviewed by: **R. Kulasingam/Jay Beech** Date: **12/17/2009**

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

	Layer No.	11YR3-4									
	Initial Stress Reference Layer (top of layer)	8	8	8	8	8	8	8	8	8	
	Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	
	Midpoint Elevation, (m / ft)	457.00	456.42	456.35	456.00	455.75	455.72	458.00	458.34	458.42	458.33
	Initial Effective Stress, σ'_i (kPa /psf)	516.00	516.00	516.00	516.00	516.00	516.00	516.00	516.00	516.00	516.00
	Final Effective Stress, σ'_f (kPa/psf)	516.00	516.00	516.00	516.00	516.00	516.00	516.00	516.00	516.00	516.00
Elastic Method											
Modulus, E (kPa/psf)=											
		Strain									
		Settlement (m / ft)									
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)		MW	MW	MW	MW	MW	MW	MW	MW	MW	MW
OCR Manual Input Value		1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)		516	516	516	516	516	516	516	516	516	516
Modified Primary Compression Index, C_{cc}		0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291
Modified Recompression Index, C_{re}		0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005
Modified Secondary Compression Index, $C_{\alpha\alpha}$		0.08%	0.08%	0.08%	0.08%	0.08%	0.08%	0.08%	0.08%	0.08%	0.08%
ratio of t2 / t1		4	4	4	4	4	4	4	4	4	4
Settlements											
Primary Settlement, (m / ft)		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Secondary Settlement (m / ft)		0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001
Total Settlement (m / ft)		0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001
Elastic or Plastic (E/P)											
1-D		P	P	P	P	P	P	P	P	P	P
Settlement of Layer 11 (m / ft)		0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001
	Layer No.	12YR3-5									
	Initial Stress Reference Layer (top of layer)	8	8	8	8	8	8	8	8	8	8
	Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1
	Midpoint Elevation, (m / ft)	455.29	454.71	454.63	454.29	454.04	454.01	456.29	456.63	456.70	456.61
	Initial Effective Stress, σ'_i (kPa /psf)	663.43	663.43	663.43	663.43	663.43	663.43	663.43	663.43	663.43	663.43
	Final Effective Stress, σ'_f (kPa/psf)	663.43	663.43	663.43	663.43	663.43	663.43	663.43	663.43	663.43	663.43
Elastic Method											
Modulus, E (kPa/psf)=											
		Strain									
		Settlement (m / ft)									
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)		MW	MW	MW	MW	MW	MW	MW	MW	MW	MW
OCR Manual Input Value		1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)		663	663	663	663	663	663	663	663	663	663
Modified Primary Compression Index, C_{cc}		0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291
Modified Recompression Index, C_{re}		0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005
Modified Secondary Compression Index, $C_{\alpha\alpha}$		0.08%	0.08%	0.08%	0.08%	0.08%	0.08%	0.08%	0.08%	0.08%	0.08%
ratio of t2 / t1		4	4	4	4	4	4	4	4	4	4
Settlements											
Primary Settlement, (m / ft)		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Secondary Settlement (m / ft)		0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001
Total Settlement (m / ft)		0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001
Elastic or Plastic (E/P)											
1-D		P	P	P	P	P	P	P	P	P	P
Settlement of Layer 12 (m / ft)		0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001
	Layer No.	13YR3-6									
	Initial Stress Reference Layer (top of layer)	8	8	8	8	8	8	8	8	8	8
	Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1
	Midpoint Elevation, (m / ft)	453.57	452.99	452.92	452.57	452.32	452.29	454.57	454.91	454.99	454.90
	Initial Effective Stress, σ'_i (kPa /psf)	811	811	811	811	811	811	811	811	811	811
	Final Effective Stress, σ'_f (kPa/psf)	811	811	811	811	811	811	811	811	811	811
Elastic Method											
Modulus, E (kPa/psf)=											
		Strain									
		Settlement (m / ft)									
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)		MW	MW	MW	MW	MW	MW	MW	MW	MW	MW
OCR Manual Input Value		1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)		811	811	811	811	811	811	811	811	811	811
Modified Primary Compression Index, C_{cc}		0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291
Modified Recompression Index, C_{re}		0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005
Modified Secondary Compression Index, $C_{\alpha\alpha}$		0.08%	0.08%	0.08%	0.08%	0.08%	0.08%	0.08%	0.08%	0.08%	0.08%
ratio of t2 / t1		4	4	4	4	4	4	4	4	4	4
Settlements											
Primary Settlement, (m / ft)		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Secondary Settlement (m / ft)		0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001
Total Settlement (m / ft)		0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001
Elastic or Plastic (E/P)											
1-D		P	P	P	P	P	P	P	P	P	P
Settlement of Layer 13 (m / ft)		0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001

Written by: **Yiwen Cao** Date: **12/17/2009** Reviewed by: **R. Kulasingam/Jay Beech** Date: **12/17/2009**

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

	Layer No.	14YR3-7									
	Initial Stress Reference Layer (top of layer)	8	8	8	8	8	8	8	8	8	
	Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	
	Midpoint Elevation, (m / ft)	451.86	451.28	451.20	450.86	450.61	450.58	452.86	453.20	453.27	453.18
	Initial Effective Stress, σ'_i (kPa /psf)	958	958	958	958	958	958	958	958	958	958
	Final Effective Stress, σ'_f (kPa/psf)	958	958	958	958	958	958	958	958	958	958
Elastic Method											
Modulus, E (kPa/psf)=											
Strain											
Settlement (m / ft)											
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)											
OCR Manual Input Value											
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)											
Modified Primary Compression Index, C_{cc}											
Modified Recompression Index, C_{re}											
Modified Secondary Compression Index, $C_{\alpha\alpha}$											
ratio of t_2 / t_1											
Settlements											
Primary Settlement, (m / ft)											
Secondary Settlement (m / ft)											
Total Settlement (m / ft)											
Elastic or Plastic (E/P)											
Settlement of Layer 14 (m / ft)											
	Layer No.	15YR2-1									
	Initial Stress Reference Layer (top of layer)	15	15	15	15	15	15	15	15	15	15
	Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1
	Midpoint Elevation, (m / ft)	451.00	450.42	450.35	450.00	449.75	449.72	451.17	451.06	451.13	451.04
	Initial Effective Stress, σ'_i (kPa /psf)	0	0	0	0	0	0	71	111	111	111
	Final Effective Stress, σ'_f (kPa/psf)	1,032	1,032	1,032	1,032	1,032	1,032	1,103	1,143	1,143	1,143
Elastic Method											
Modulus, E (kPa/psf)=											
Strain											
Settlement (m / ft)											
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)											
OCR Manual Input Value											
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)											
Modified Primary Compression Index, C_{cc}											
Modified Recompression Index, C_{re}											
Modified Secondary Compression Index, $C_{\alpha\alpha}$											
ratio of t_2 / t_1											
Settlements											
Primary Settlement, (m / ft)											
Secondary Settlement (m / ft)											
Total Settlement (m / ft)											
Elastic or Plastic (E/P)											
Settlement of Layer 15 (m / ft)											
	Layer No.	16YR2-2									
	Initial Stress Reference Layer (top of layer)	15	15	15	15	15	15	15	15	15	15
	Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1
	Midpoint Elevation, (m / ft)	451.00	450.42	450.35	450.00	449.75	449.72	449.51	448.49	448.56	448.47
	Initial Effective Stress, σ'_i (kPa /psf)	0	0	0	0	0	0	214	332	332	332
	Final Effective Stress, σ'_f (kPa/psf)	1,032	1,032	1,032	1,032	1,032	1,032	1,246	1,364	1,364	1,364
Elastic Method											
Modulus, E (kPa/psf)=											
Strain											
Settlement (m / ft)											
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)											
OCR Manual Input Value											
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)											
Modified Primary Compression Index, C_{cc}											
Modified Recompression Index, C_{re}											
Modified Secondary Compression Index, $C_{\alpha\alpha}$											
ratio of t_2 / t_1											
Settlements											
Primary Settlement, (m / ft)											
Secondary Settlement (m / ft)											
Total Settlement (m / ft)											
Elastic or Plastic (E/P)											
Settlement of Laver 16 (m / ft)											

Written by: **Yiwen Cao** Date: **12/17/2009** Reviewed by: **R. Kulasingam/Jay Beech** Date: **12/17/2009**

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

	Layer No.	17		YR2-3																			
		Initial Stress Reference Layer (top of layer)				15	15	15	15	15	15	15	15	15	15	15	15	15	15	15	15		
		Final Stress Reference Layer (top of layer)				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1			
		Midpoint Elevation, (m / ft)				451.00	450.42	450.35	450.00	449.75	449.72	447.85	445.91	445.99	445.90								
		Initial Effective Stress, σ'_i (kPa /psf)				0	0	0	0	0	0	356	553	553	553								
	Final Effective Stress, σ'_f (kPa/psf)				1,032	1,032	1,032	1,032	1,032	1,032	1,388	1,585	1,585	1,585									
Elastic Method																							
Modulus, E (kPa/psf)=								Strain															
								Settlement (m / ft)															
1-D Consolidation Theory (Plastic Method)																							
Consolidation Properties																							
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)				MW				MW				MW				MW				MW			
OCR Manual Input Value				1.0				1.0				1.0				1.0				1.0			
OCR Computation Input																							
Preconsolidation pressure, σ'_p (kPa / psf)				0				0				0				356				553			
Modified Primary Compression Index, C_{cc}				0.291				0.291				0.291				0.291				0.291			
Modified Recompression Index, C_{re}				0.005				0.005				0.005				0.005				0.005			
Modified Secondary Compression Index, $C_{\alpha\alpha}$				0.60%				0.60%				0.60%				0.60%				0.60%			
ratio of t_2 / t_1				6				6				6				6				6			
Settlements																							
Primary Settlement, (m / ft)				0.000				0.000				0.000				0.000				0.285			
Secondary Settlement (m / ft)				0.000				0.000				0.000				0.000				0.008			
Total Settlement (m / ft)				0.000				0.000				0.000				0.000				0.293			
				Elastic or Plastic (E/P)				P				P				P				P			
				1-D				1-D				1-D				1-D				1-D			
				Settlement of Layer 17 (m / ft)				0.000				0.000				0.000				0.293			
	Layer No.	18		YR2-4																			
		Initial Stress Reference Layer (top of layer)				15	15	15	15	15	15	15	15	15	15	15	15	15	15	15	15		
		Final Stress Reference Layer (top of layer)				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1			
		Midpoint Elevation, (m / ft)				451.00	450.42	450.35	450.00	449.75	449.72	446.20	443.34	443.42	443.33								
		Initial Effective Stress, σ'_i (kPa /psf)				0	0	0	0	0	0	499	774	774	774								
	Final Effective Stress, σ'_f (kPa/psf)				1,032	1,032	1,032	1,032	1,032	1,032	1,531	1,806	1,806	1,806									
Elastic Method																							
Modulus, E (kPa/psf)=								Strain															
								Settlement (m / ft)															
1-D Consolidation Theory (Plastic Method)																							
Consolidation Properties																							
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)				MW				MW				MW				MW				MW			
OCR Manual Input Value				1.0				1.0				1.0				1.0				1.0			
OCR Computation Input																							
Preconsolidation pressure, σ'_p (kPa / psf)				0				0				0				499				774			
Modified Primary Compression Index, C_{cc}				0.291				0.291				0.291				0.291				0.291			
Modified Recompression Index, C_{re}				0.005				0.005				0.005				0.005				0.005			
Modified Secondary Compression Index, $C_{\alpha\alpha}$				0.60%				0.60%				0.60%				0.60%				0.60%			
ratio of t_2 / t_1				6				6				6				6				6			
Settlements																							
Primary Settlement, (m / ft)				0.000				0.000				0.000				0.000				0.235			
Secondary Settlement (m / ft)				0.000				0.000				0.000				0.000				0.008			
Total Settlement (m / ft)				0.000				0.000				0.000				0.000				0.243			
				Elastic or Plastic (E/P)				P				P				P				P			
				1-D				1-D				1-D				1-D				1-D			
				Settlement of Layer 18 (m / ft)				0.000				0.000				0.000				0.243			
	Layer No.	19		YR2-5																			
		Initial Stress Reference Layer (top of layer)				15	15	15	15	15	15	15	15	15	15	15	15	15	15	15	15		
		Final Stress Reference Layer (top of layer)				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1			
		Midpoint Elevation, (m / ft)				451.00	450.42	450.35	450.00	449.75	449.72	444.54	440.77	440.85	440.76								
		Initial Effective Stress, σ'_i (kPa /psf)				0	0	0	0	0	0	642	995	995	995								
	Final Effective Stress, σ'_f (kPa/psf)				1,032	1,032	1,032	1,032	1,032	1,032	1,674	2,027	2,027	2,027									
Elastic Method																							
Modulus, E (kPa/psf)=								Strain															
								Settlement (m / ft)															
1-D Consolidation Theory (Plastic Method)																							
Consolidation Properties																							
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)				MW				MW				MW				MW				MW			
OCR Manual Input Value				1.0				1.0				1.0				1.0				1.0			
OCR Computation Input																							
Preconsolidation pressure, σ'_p (kPa / psf)				0				0				0				642				995			
Modified Primary Compression Index, C_{cc}				0.291				0.291				0.291				0.291				0.291			
Modified Recompression Index, C_{re}				0.005				0.005				0.005				0.005				0.005			
Modified Secondary Compression Index, $C_{\alpha\alpha}$				0.60%				0.60%				0.60%				0.60%				0.60%			
ratio of t_2 / t_1				6				6				6				6				6			
Settlements																							
Primary Settlement, (m / ft)				0.000				0.000				0.000				0.000				0.201			
Secondary Settlement (m / ft)				0.000				0.000				0.000				0.000				0.008			
Total Settlement (m / ft)				0.000				0.000				0.000				0.000				0.209			
				Elastic or Plastic (E/P)				P				P				P				P			
				1-D				1-D				1-D				1-D				1-D			
				Settlement of Layer 19 (m / ft)				0.000				0.000				0.000				0.209			

Written by: **Yiwen Cao** Date: **12/17/2009** Reviewed by: **R. Kulasingam/Jay Beech** Date: **12/17/2009**

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

	Layer No.	20		YR2-6																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																
--	-----------	----	--	-------	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Written by: **Yiwen Cao** Date: **12/17/2009** Reviewed by: **R. Kulasingam/Jay Beech** Date: **12/17/2009**

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

Layer No.	23 YR1-2									
Initial Stress Reference Layer (top of layer)	22	22	22	22	22	22	22	22	22	22
Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1
Midpoint Elevation, (m / ft)	446.50	445.92	445.85	445.50	445.25	445.22	438.80	434.34	434.42	434.33
Initial Effective Stress, σ'_i (kPa / psf)	387	387	387	387	387	387	137	0	0	0
Final Effective Stress, σ'_f (kPa/psf)	1,419	1,419	1,419	1,419	1,419	1,419	2,168	2,580	2,580	2,580
Elastic Method										
Modulus, E (kPa/psf)=										
Strain										
Settlement (m / ft)										
1-D Consolidation Theory (Plastic Method)										
Consolidation Properties										
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)	MW	MW	MW	MW	MW	MW	MW	MW	MW	MW
OCR Manual Input Value	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input										
Preconsolidation pressure, σ'_p (kPa / psf)	387	387	387	387	387	387	137	0	0	0
Modified Primary Compression Index, C_{cc}	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291
Modified Recompression Index, C_{re}	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005
Modified Secondary Compression Index, $C_{\alpha\alpha}$	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%
ratio of t_2 / t_1	8	8	8	8	8	8	8	8	8	8
Settlements										
Primary Settlement, (m / ft)	0.493	0.493	0.493	0.493	0.493	0.493	0.372	0.000	0.000	0.000
Secondary Settlement (m / ft)	0.016	0.016	0.016	0.016	0.016	0.016	0.006	0.000	0.000	0.000
Total Settlement (m / ft)	0.509	0.509	0.509	0.509	0.509	0.509	0.378	0.000	0.000	0.000
Elastic or Plastic (E/P)										
1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D
Settlement of Layer 23 (m / ft)	0.509	0.509	0.509	0.509	0.509	0.509	0.378	0.000	0.000	0.000
Layer No.	24 YR1-3									
Initial Stress Reference Layer (top of layer)	22	22	22	22	22	22	22	22	22	22
Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1
Midpoint Elevation, (m / ft)	443.50	442.92	442.85	442.50	442.25	442.22	437.73	434.34	434.42	434.33
Initial Effective Stress, σ'_i (kPa / psf)	645	645	645	645	645	645	229	0	0	0
Final Effective Stress, σ'_f (kPa/psf)	1,677	1,677	1,677	1,677	1,677	1,677	2,259	2,580	2,580	2,580
Elastic Method										
Modulus, E (kPa/psf)=										
Strain										
Settlement (m / ft)										
1-D Consolidation Theory (Plastic Method)										
Consolidation Properties										
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)	MW	MW	MW	MW	MW	MW	MW	MW	MW	MW
OCR Manual Input Value	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input										
Preconsolidation pressure, σ'_p (kPa / psf)	645	645	645	645	645	645	229	0	0	0
Modified Primary Compression Index, C_{cc}	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291
Modified Recompression Index, C_{re}	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005
Modified Secondary Compression Index, $C_{\alpha\alpha}$	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%
ratio of t_2 / t_1	8	8	8	8	8	8	8	8	8	8
Settlements										
Primary Settlement, (m / ft)	0.363	0.363	0.363	0.363	0.363	0.363	0.309	0.000	0.000	0.000
Secondary Settlement (m / ft)	0.016	0.016	0.016	0.016	0.016	0.016	0.006	0.000	0.000	0.000
Total Settlement (m / ft)	0.379	0.379	0.379	0.379	0.379	0.379	0.314	0.000	0.000	0.000
Elastic or Plastic (E/P)										
1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D
Settlement of Layer 24 (m / ft)	0.379	0.379	0.379	0.379	0.379	0.379	0.314	0.000	0.000	0.000
Layer No.	25 YR1-4									
Initial Stress Reference Layer (top of layer)	22	22	22	22	22	22	22	22	22	22
Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1
Midpoint Elevation, (m / ft)	440.50	439.92	439.85	439.50	439.25	439.22	436.66	434.34	434.42	434.33
Initial Effective Stress, σ'_i (kPa / psf)	903.00	903.00	903.00	903.00	903.00	903.00	320.75	0.00	0.00	0.00
Final Effective Stress, σ'_f (kPa/psf)	1,935.00	1,935.00	1,935.00	1,935.00	1,935.00	1,935.00	2,350.90	2,580.00	2,580.00	2,580.00
Elastic Method										
Modulus, E (kPa/psf)=										
Strain										
Settlement (m / ft)										
1-D Consolidation Theory (Plastic Method)										
Consolidation Properties										
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)	MW	MW	MW	MW	MW	MW	MW	MW	MW	MW
OCR Manual Input Value	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input										
Preconsolidation pressure, σ'_p (kPa / psf)	903	903	903	903	903	903	321	0	0	0
Modified Primary Compression Index, C_{cc}	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291
Modified Recompression Index, C_{re}	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005
Modified Secondary Compression Index, $C_{\alpha\alpha}$	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%
ratio of t_2 / t_1	8	8	8	8	8	8	8	8	8	8
Settlements										
Primary Settlement, (m / ft)	0.289	0.289	0.289	0.289	0.289	0.289	0.269	0.000	0.000	0.000
Secondary Settlement (m / ft)	0.016	0.016	0.016	0.016	0.016	0.016	0.006	0.000	0.000	0.000
Total Settlement (m / ft)	0.306	0.306	0.306	0.306	0.306	0.306	0.274	0.000	0.000	0.000
Elastic or Plastic (E/P)										
1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D
Settlement of Layer 25 (m / ft)	0.306	0.306	0.306	0.306	0.306	0.306	0.274	0.000	0.000	0.000

Written by: **Yiwen Cao** Date: **12/17/2009** Reviewed by: **R. Kulasingam/Jay Beech** Date: **12/17/2009**

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

	Layer No.	26	YR1-5									
		Initial Stress Reference Layer (top of layer)		22	22	22	22	22	22	22	22	
		Final Stress Reference Layer (top of layer)		1	1	1	1	1	1	1	1	
		Midpoint Elevation, (m / ft)	437.50	436.92	436.85	436.50	436.25	436.22	435.60	434.34	434.42	434.33
		Initial Effective Stress, σ'_i (kPa /psf)	1,161.00	1,161.00	1,161.00	1,161.00	1,161.00	1,161.00	412.39	0.00	0.00	0.00
		Final Effective Stress, σ'_f (kPa/psf)	2,193.00	2,193.00	2,193.00	2,193.00	2,193.00	2,442.54	2,580.00	2,580.00	2,580.00	
Elastic Method												
Modulus, E (kPa/psf)=			Strain									
			Settlement (m / ft)									
1-D Consolidation Theory (Plastic Method)												
Consolidation Properties												
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)			MW	MW	MW	MW	MW	MW	MW	MW	MW	
OCR Manual Input Value			1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	
OCR Computation Input												
Preconsolidation pressure, σ'_p (kPa / psf)			1,161	1,161	1,161	1,161	1,161	1,161	412	0	0	
Modified Primary Compression Index, C_{cc}			0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	
Modified Recompression Index, C_{re}			0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	
Modified Secondary Compression Index, $C_{\alpha\alpha}$			0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	
ratio of t_2 / t_1			8	8	8	8	8	8	8	8	8	
Settlements												
Primary Settlement, (m / ft)			0.241	0.241	0.241	0.241	0.241	0.241	0.240	0.000	0.000	
Secondary Settlement (m / ft)			0.016	0.016	0.016	0.016	0.016	0.016	0.006	0.000	0.000	
Total Settlement (m / ft)			0.258	0.258	0.258	0.258	0.258	0.258	0.246	0.000	0.000	
Elastic or Plastic (E/P)			P	P	P	P	P	P	P	P	P	
			1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	
Settlement of Layer 26 (m / ft)			0.258	0.258	0.258	0.258	0.258	0.258	0.246	0.000	0.000	
	Layer No.	27	YR1-6									
		Initial Stress Reference Layer (top of layer)		22	22	22	22	22	22	22	22	
		Final Stress Reference Layer (top of layer)		1	1	1	1	1	1	1	1	
		Midpoint Elevation, (m / ft)	434.50	433.92	433.85	433.50	433.25	433.22	434.53	434.34	434.42	434.33
		Initial Effective Stress, σ'_i (kPa /psf)	1,419.00	1,419.00	1,419.00	1,419.00	1,419.00	1,419.00	504.03	0.00	0.00	0.00
		Final Effective Stress, σ'_f (kPa/psf)	2,451.00	2,451.00	2,451.00	2,451.00	2,451.00	2,534.18	2,580.00	2,580.00	2,580.00	
Elastic Method												
Modulus, E (kPa/psf)=			Strain									
			Settlement (m / ft)									
1-D Consolidation Theory (Plastic Method)												
Consolidation Properties												
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)			MW	MW	MW	MW	MW	MW	MW	MW	MW	
OCR Manual Input Value			1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	
OCR Computation Input												
Preconsolidation pressure, σ'_p (kPa / psf)			1,419	1,419	1,419	1,419	1,419	1,419	504	0	0	
Modified Primary Compression Index, C_{cc}			0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	
Modified Recompression Index, C_{re}			0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	
Modified Secondary Compression Index, $C_{\alpha\alpha}$			0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	
ratio of t_2 / t_1			8	8	8	8	8	8	8	8	8	
Settlements												
Primary Settlement, (m / ft)			0.207	0.207	0.207	0.207	0.207	0.207	0.218	0.000	0.000	
Secondary Settlement (m / ft)			0.016	0.016	0.016	0.016	0.016	0.016	0.006	0.000	0.000	
Total Settlement (m / ft)			0.224	0.224	0.224	0.224	0.224	0.224	0.224	0.000	0.000	
Elastic or Plastic (E/P)			P	P	P	P	P	P	P	P	P	
			1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	
Settlement of Layer 27 (m / ft)			0.224	0.224	0.224	0.224	0.224	0.224	0.224	0.000	0.000	

Written by: **Yiwen Cao** Date: **12/17/2009** Reviewed by: **R. Kulasingam/Jay Beech** Date: **12/17/2009**

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

LAYER SETTLEMENT	Layer No.	Material											
	1	Null Layer											
	2	YR4-1	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	
	3	YR4-2	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	
	4	YR4-3	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	
	5	YR4-4	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	
	6	YR4-5	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	
	7	YR4-6	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	
	8	YR3-1	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	
	9	YR3-2	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	
	10	YR3-3	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	
	11	YR3-4	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	
	12	YR3-5	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	
	13	YR3-6	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	
	14	YR3-7	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	
	15	YR2-1	0.000	0.000	0.000	0.000	0.000	0.000	0.582	0.772	0.772	0.772	
	16	YR2-2	0.000	0.000	0.000	0.000	0.000	0.000	0.377	0.472	0.472	0.472	
	17	YR2-3	0.000	0.000	0.000	0.000	0.000	0.000	0.293	0.355	0.355	0.355	
	18	YR2-4	0.000	0.000	0.000	0.000	0.000	0.000	0.243	0.288	0.288	0.288	
	19	YR2-5	0.000	0.000	0.000	0.000	0.000	0.000	0.209	0.243	0.243	0.243	
	20	YR2-6	0.000	0.000	0.000	0.000	0.000	0.000	0.184	0.212	0.212	0.212	
	21	YR2-7	0.000	0.000	0.000	0.000	0.000	0.000	0.165	0.188	0.188	0.188	
	22	YR1-1	0.850	0.850	0.850	0.850	0.850	0.850	0.520	0.000	0.000	0.000	
	23	YR1-2	0.509	0.509	0.509	0.509	0.509	0.509	0.378	0.000	0.000	0.000	
	24	YR1-3	0.379	0.379	0.379	0.379	0.379	0.379	0.314	0.000	0.000	0.000	
	25	YR1-4	0.306	0.306	0.306	0.306	0.306	0.306	0.274	0.000	0.000	0.000	
	26	YR1-5	0.258	0.258	0.258	0.258	0.258	0.258	0.246	0.000	0.000	0.000	
	27	YR1-6	0.224	0.224	0.224	0.224	0.224	0.224	0.224	0.000	0.000	0.000	
	28	Additional Foundation Settlement	9.545	9.274	9.514	9.468	9.109	9.259	9.683	7.992	7.836	7.988	
	29												
	30												
		TOTAL SETTLEMENT		12.08	11.81	12.05	12.00	11.64	11.79	13.70	10.53	10.37	10.52
	POST-SETTLEMENT ELEVATION(M/FT)	Line 1	Top of Year 4 Dredge	450.92	450.62	450.30	450.00	450.11	449.93	450.30	453.82	454.05	453.80
Line 2		Top of Year 4 Dredge	450.92	450.62	450.30	450.00	450.11	449.93	450.30	453.82	454.05	453.80	
Line 3			450.92	450.62	450.30	450.00	450.11	449.93	450.30	453.82	454.05	453.80	
Line 4			450.92	450.62	450.30	450.00	450.11	449.93	450.30	453.82	454.05	453.80	
Line 5			450.92	450.62	450.30	450.00	450.11	449.93	450.30	453.82	454.05	453.80	
Line 6			450.92	450.62	450.30	450.00	450.11	449.93	450.30	453.82	454.05	453.80	
Line 7			450.92	450.62	450.30	450.00	450.11	449.93	450.30	453.82	454.05	453.80	
Line 8		Top of Year 3 Dredge	450.92	450.62	450.30	450.00	450.11	449.93	450.30	453.82	454.05	453.80	
Line 9			449.21	448.90	448.59	448.29	448.40	448.22	448.59	452.10	452.33	452.09	
Line 10			447.50	447.19	446.87	446.57	446.69	446.50	446.88	450.39	450.62	450.38	
Line 11			445.78	445.48	445.16	444.86	444.97	444.79	445.16	448.67	448.91	448.66	
Line 12			444.07	443.76	443.45	443.15	443.26	443.08	443.45	446.96	447.19	446.95	
Line 13			442.36	442.05	441.73	441.43	441.54	441.36	441.74	445.25	445.48	445.24	
Line 14			440.64	440.34	440.02	439.72	439.83	439.65	440.02	443.53	443.76	443.52	
Line 15		Top of Year 2 Dredge	438.93	438.62	438.31	438.01	438.12	437.94	438.31	441.82	442.05	441.81	
Line 16			438.93	438.62	438.31	438.01	438.12	437.94	437.23	440.02	440.25	440.01	
Line 17			438.93	438.62	438.31	438.01	438.12	437.94	435.95	437.92	438.15	437.91	
Line 18			438.93	438.62	438.31	438.01	438.12	437.94	434.59	435.71	435.94	435.69	
Line 19			438.93	438.62	438.31	438.01	438.12	437.94	433.17	433.42	433.65	433.41	
Line 20			438.93	438.62	438.31	438.01	438.12	437.94	431.72	431.09	431.32	431.08	
Line 21			438.93	438.62	438.31	438.01	438.12	437.94	430.25	428.73	428.96	428.72	
Line 22		Top of Year 1 Dredge	438.93	438.62	438.31	438.01	438.12	437.94	428.76	426.35	426.58	426.34	
Line 23			436.78	436.47	436.16	435.86	435.97	435.79	428.21	426.35	426.58	426.34	
Line 24			434.29	433.98	433.67	433.37	433.48	433.30	427.52	426.35	426.58	426.34	
Line 25			431.67	431.36	431.04	430.75	430.86	430.67	426.77	426.35	426.58	426.34	
Line 26			428.97	428.67	428.35	428.05	428.16	427.98	425.98	426.35	426.58	426.34	
Line 27			426.23	425.92	425.61	425.31	425.42	425.24	425.16	426.35	426.58	426.34	
Line 28		Top of Gravel(Top of Incompressible Soil)	423.45	423.15	422.83	422.53	422.64	422.46	424.32	426.35	426.58	426.34	
Line 29													
Line 30													
Line 31													

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

Attachment 4

CASE 3: Settlement Analysis for Top of LPSL 30 Years after Closure (i.e., End of Year 35) (Points 1001 to 1010)

Written by: **Yiwen Cao** Date: **12/17/2009** Reviewed by: **R. Kulasingam/Jay Beech** Date: **12/17/2009**

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

Settlement Prediction Model											
Programmer: Yiwen Cao, GeoSyntec Consultants Version Control V 1.002 11.14.2007 Project: Onondaga Lake SCA Final Notes: Unit: ft / psf Average Compaction Effort = 1440.00 kPa or psf Consider Compaction Effort = N yes or no											
Point #											
Distance (meter or ft)	1001	1002	1003	1004	1005	1006	1007	1008	1009	1010	
	0.00	0.00	0.00			0.00	0.00	0.00	0.00	0.00	
ELEVATION (M/FT)	Line 1	Top of Final Cover	455.76	454.88	455.64	455.51	454.68	455.50	456.35	457.00	457.01
	Line 2	Top of Dredge	450.92	450.62	450.30	450.00	450.11	449.93	450.30	453.82	454.05
	Line 3	Top of Gravel	423.45	423.15	422.83	422.53	422.64	422.46	424.32	426.35	426.58
	Line 4	Top of Clay	422.22	421.73	421.49	421.25	420.89	420.74	422.92	425.01	425.16
	Line 5	Top of Dike	420.48	419.75	419.74	419.32	418.03	418.51	421.12	423.01	423.19
	Line 6	Top of Subgrade	420.48	419.75	419.73	419.32	417.99	418.51	421.12	423.01	423.19
	Line 7		418.52	417.79	417.77	417.36	416.03	416.54	419.16	421.05	420.65
	Line 8		416.55	415.84	415.80	415.40	414.07	414.57	417.20	419.09	418.11
	Line 9		414.59	413.88	413.84	413.44	412.12	412.60	415.24	417.14	415.57
	Line 10		412.63	411.92	411.88	411.48	410.16	410.63	413.28	415.18	413.03
	Line 11		410.67	409.96	409.92	409.52	408.20	408.67	411.32	413.22	410.49
	Line 12		408.70	408.01	407.95	407.56	406.24	406.70	409.36	411.26	407.95
	Line 13		406.74	406.05	405.99	405.60	404.29	404.73	407.40	409.30	405.41
	Line 14		404.78	404.09	404.03	403.64	402.33	402.76	405.44	407.34	402.87
	Line 15		402.81	402.14	402.06	401.68	400.37	400.79	403.47	405.39	400.32
	Line 16		400.85	400.18	400.10	399.72	398.41	398.82	401.51	403.43	397.78
	Line 17		398.89	398.22	398.14	397.76	396.46	396.85	399.55	401.47	395.24
	Line 18		396.92	396.27	396.17	395.80	394.50	394.88	397.59	399.51	392.70
	Line 19		394.96	394.31	394.21	393.84	392.54	392.92	395.63	397.55	390.16
	Line 20		393.00	392.35	392.25	391.88	390.58	390.95	393.67	395.59	387.62
	Line 21		391.04	390.39	390.29	389.92	388.63	388.98	391.71	393.64	385.08
	Line 22		389.07	388.44	388.32	387.96	386.67	387.01	389.75	391.68	382.54
	Line 23	Bottom of Zone2 Above GW	387.11	386.48	386.36	386.00	384.71	385.04	387.79	389.72	380.00
	Line 24		387.11	386.48	386.36	386.00	384.71	385.04	387.79	389.72	380.00
	Line 25	Bottom of Zone 3 Above GW	387.11	386.48	386.36	386.00	384.71	385.04	387.79	389.72	380.00
	Line 26		380.41	380.25	380.04	379.88	379.36	379.40	380.74	384.86	380.00
	Line 27	Bottom of Zone 2 Below GW	373.71	374.01	373.71	373.75	374.01	373.75	373.69	380.00	380.00
	Line 28	Top of Incompressible Layer	355.70	361.07	356.29	357.26	362.61	358.34	355.00	380.00	380.00
	Line 29	GND for sigma p	430.02	429.02	429.25	428.78	427.10	427.77	430.81	431.00	431.04
	Line 30	GW	375.00	375.00	375.00	375.00	375.00	375.00	375.00	375.00	375.00
	Line 31	ROCK	355.70	361.07	356.29	357.26	362.61	358.34	355.00	380.00	380.00
LAYER THICKNESS (M/FT)	Layer No.	From To	Material								
	1	1	2	Cover	4.84	4.26	5.34	5.51	4.57	5.57	6.05
	2	2	3	Dredge	27.47	27.47	27.47	27.47	27.47	27.47	27.47
	3	3	4	Gravel	1.23	1.42	1.34	1.28	1.75	1.72	1.40
	4	4	5	Clay	1.74	1.98	1.75	1.93	2.86	2.23	1.80
	5	5	6	Dike	0.00	0.00	0.01	0.00	0.04	0.00	0.00
	6	6	7	Zone2-Above-GW-1	1.96	1.96	1.96	1.96	1.96	1.97	1.96
	7	7	8	Zone2-Above-GW-2	1.96	1.96	1.96	1.96	1.96	1.97	1.96
	8	8	9	Zone2-Above-GW-3	1.96	1.96	1.96	1.96	1.96	1.97	1.96
	9	9	10	Zone2-Above-GW-4	1.96	1.96	1.96	1.96	1.96	1.97	1.96
	10	10	11	Zone2-Above-GW-5	1.96	1.96	1.96	1.96	1.96	1.97	1.96
	11	11	12	Zone2-Above-GW-6	1.96	1.96	1.96	1.96	1.96	1.97	1.96
	12	12	13	Zone2-Above-GW-7	1.96	1.96	1.96	1.96	1.96	1.97	1.96
	13	13	14	Zone2-Above-GW-8	1.96	1.96	1.96	1.96	1.96	1.97	1.96
	14	14	15	Zone2-Above-GW-9	1.96	1.96	1.96	1.96	1.96	1.97	1.96
	15	15	16	Zone2-Above-GW-10	1.96	1.96	1.96	1.96	1.96	1.97	1.96
	16	16	17	Zone2-Above-GW-11	1.96	1.96	1.96	1.96	1.96	1.97	1.96
	17	17	18	Zone2-Above-GW-12	1.96	1.96	1.96	1.96	1.96	1.97	1.96
	18	18	19	Zone2-Above-GW-13	1.96	1.96	1.96	1.96	1.96	1.97	1.96
	19	19	20	Zone2-Above-GW-14	1.96	1.96	1.96	1.96	1.96	1.97	1.96
	20	20	21	Zone2-Above-GW-15	1.96	1.96	1.96	1.96	1.96	1.97	1.96
	21	21	22	Zone2-Above-GW-16	1.96	1.96	1.96	1.96	1.96	1.97	1.96
	22	22	23	Zone2-Above-GW-17	1.96	1.96	1.96	1.96	1.96	1.97	1.96
	23	23	24	Zone3-Above-GW-1	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	24	24	25	Zone3-Above-GW-2	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	25	25	26	Zone2-Below-GW-18	6.70	6.24	6.33	6.13	5.35	5.65	7.05
	26	26	27	Zone2-Below-GW-19	6.70	6.24	6.32	6.13	5.35	5.64	7.05
	27	27	28	Zone3-Below-GW-3	18.01	12.94	17.42	16.49	11.40	15.41	18.69
	28										
	29	29	30	Soil Above GW	55.02	54.02	54.25	53.78	52.10	52.77	55.81
	30	30	31	Soil Below GW	19.30	13.93	18.71	17.74	12.39	16.66	20.00
	Thickness Check										
	From Line	To Line	SUM		100.06	93.81	99.35	98.25	92.07	97.16	101.35
	1	28	Thickness =		100.06	93.81	99.35	98.25	92.07	97.16	101.35
	Thickness Check				OK	OK	OK	OK	OK	OK	OK

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: Honeywell Project: Onondaga Lake SCA Final Design Project/ Proposal No.: GJ4299 Task No.: 04

UNIT WEIGHT	Layer No.	Material											
	1	Cover	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0
	2	Dredge	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	3	Gravel	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0
	4	Clay	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0
	5	Dike	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0
	6	Zone2-Above-GW-1	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	7	Zone2-Above-GW-2	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	8	Zone2-Above-GW-3	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	9	Zone2-Above-GW-4	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	10	Zone2-Above-GW-5	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	11	Zone2-Above-GW-6	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	12	Zone2-Above-GW-7	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	13	Zone2-Above-GW-8	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	14	Zone2-Above-GW-9	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	15	Zone2-Above-GW-10	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	16	Zone2-Above-GW-11	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	17	Zone2-Above-GW-12	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	18	Zone2-Above-GW-13	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	19	Zone2-Above-GW-14	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	20	Zone2-Above-GW-15	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	21	Zone2-Above-GW-16	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	22	Zone2-Above-GW-17	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	23	Zone3-Above-GW-1	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	24	Zone3-Above-GW-2	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	25	Zone2-Below-GW-18	19.6	19.6	19.6	19.6	19.6	19.6	19.6	19.6	19.6	19.6	19.6
	26	Zone2-Below-GW-19	19.6	19.6	19.6	19.6	19.6	19.6	19.6	19.6	19.6	19.6	19.6
	27	Zone3-Below-GW-3	19.6	19.6	19.6	19.6	19.6	19.6	19.6	19.6	19.6	19.6	19.6
	28												
	29	Soil Above GW	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	30	Soil below GW	19.6	19.6	19.6	19.6	19.6	19.6	19.6	19.6	19.6	19.6	19.6
	Layer No.	1	Cover										
			Initial Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1
			Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1
			Midpoint Elevation, (m / ft)	453.34	452.75	452.97	452.76	452.40	452.72	453.33	455.41	455.53	455.41
			Initial Effective Stress, σ'_i (kPa /psf)	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight
			Final Effective Stress, σ'_f (kPa/psf)	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight
Elastic Method													
Modulus, E (kPa/psf)=													
Strain													
Settlement (m / ft)													
1-D Consolidation Theory (Plastic Method)													
Consolidation Properties													
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)													
OCR Manual Input Value													
OCR Computation Input													
Preconsolidation pressure, σ'_p (kPa / psf)													
Modified Primary Compression Index, C_{cc}													
Modified Recompression Index, C_{rc}													
Modified Secondary Compression Index, C_{α}													
ratio of t_2 / t_1													
Settlements													
Primary Settlement, (m / ft)													
Secondary Settlement (m / ft)													
Total Settlement (m / ft)													
Elastic or Plastic (E/P)													
Settlement of Layer 1 (m / ft)													

Written by: **Yiwen Cao** Date: **12/17/2009** Reviewed by: **R. Kulasingam/Jay Beech** Date: **12/17/2009**

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

	Layer No.	2 Dredge										
		Initial Stress Reference Layer (top of layer)										
		Final Stress Reference Layer (top of layer)										
	Midpoint Elevation, (m / ft)	437.19	436.89	436.57	436.27	436.38	436.20	437.31	440.09	440.32	440.07	
	Initial Effective Stress, σ'_i (kPa /psf)	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	
		Final Effective Stress, σ'_f (kPa/psf)										
		Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	
Elastic Method												
Modulus, E (kPa/psf)=		Strain										
		Settlement (m / ft)										
1-D Consolidation Theory (Plastic Method)												
Consolidation Properties												
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)												
OCR Manual Input Value												
OCR Computation Input												
Preconsolidation pressure, σ'_p (kPa / psf)												
Modified Primary Compression Index, C_{cc}												
Modified Recompression Index, C_{re}												
Modified Secondary Compression Index, $C_{\alpha\epsilon}$												
ratio of t_2 / t_1												
Settlements												
Primary Settlement, (m / ft)												
Secondary Settlement (m / ft)												
Total Settlement (m / ft)												
		Elastic or Plastic (E/P)										
		Settlement of Layer 2 (m / ft)										
	Layer No.	3 Gravel										
		Initial Stress Reference Layer (top of layer)										
		Final Stress Reference Layer (top of layer)										
	Midpoint Elevation, (m / ft)	422.84	422.44	422.16	421.89	421.77	421.60	423.62	425.68	425.87	425.68	
	Initial Effective Stress, σ'_i (kPa /psf)	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	
		Final Effective Stress, σ'_f (kPa/psf)										
		Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	
Elastic Method												
Modulus, E (kPa/psf)=		Strain										
		Settlement (m / ft)										
1-D Consolidation Theory (Plastic Method)												
Consolidation Properties												
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)												
OCR Manual Input Value												
OCR Computation Input												
Preconsolidation pressure, σ'_p (kPa / psf)												
Modified Primary Compression Index, C_{cc}												
Modified Recompression Index, C_{re}												
Modified Secondary Compression Index, $C_{\alpha\epsilon}$												
ratio of t_2 / t_1												
Settlements												
Primary Settlement, (m / ft)												
Secondary Settlement (m / ft)												
Total Settlement (m / ft)												
		Elastic or Plastic (E/P)										
		Settlement of Layer 3 (m / ft)										
	Layer No.	4 Clay										
		Initial Stress Reference Layer (top of layer)										
		Final Stress Reference Layer (top of layer)										
	Midpoint Elevation, (m / ft)	421.35	420.74	420.62	420.29	419.46	419.63	422.02	424.01	424.18	424.01	
	Initial Effective Stress, σ'_i (kPa /psf)	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	
		Final Effective Stress, σ'_f (kPa/psf)										
		Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	
Elastic Method												
Modulus, E (kPa/psf)=		Strain										
		Settlement (m / ft)										
1-D Consolidation Theory (Plastic Method)												
Consolidation Properties												
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)												
OCR Manual Input Value												
OCR Computation Input												
Preconsolidation pressure, σ'_p (kPa / psf)												
Modified Primary Compression Index, C_{cc}												
Modified Recompression Index, C_{re}												
Modified Secondary Compression Index, $C_{\alpha\epsilon}$												
ratio of t_2 / t_1												
Settlements												
Primary Settlement, (m / ft)												
Secondary Settlement (m / ft)												
Total Settlement (m / ft)												
		Elastic or Plastic (E/P)										
		Settlement of Layer 4 (m / ft)										

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: Honeywell Project: Onondaga Lake SCA Final Design Project/ Proposal No.: GJ4299 Task No.: 04

	Layer No. 5	Dike									
	Initial Stress Reference Layer (top of layer)	5	5	5	5	5	5	5	5	5	
	Final Stress Reference Layer (top of layer)	5	5	5	5	5	5	5	5	5	
	Midpoint Elevation, (m / ft)	420.48	419.75	419.74	419.32	418.01	418.51	421.12	423.01	423.19	423.01
	Initial Effective Stress, σ'_i (kPa /psf)	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight
	Final Effective Stress, σ'_f (kPa/psf)	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight
Elastic Method											
Modulus, E (kPa/psf)=		Strain									
		Settlement (m / ft)									
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)											
OCR Manual Input Value											
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)											
Modified Primary Compression Index, C_{cc}											
Modified Recompression Index, C_{re}											
Modified Secondary Compression Index, $C_{\alpha\alpha}$											
ratio of t_2 / t_1											
Settlements											
Primary Settlement, (m / ft)											
Secondary Settlement (m / ft)											
Total Settlement (m / ft)											
Elastic or Plastic (E/P)											
Settlement of Layer 5 (m / ft)											
	Layer No. 6	Zone2-Above-GW-1									
	Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2	
	Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	
	Midpoint Elevation, (m / ft)	419.50	418.77	418.75	418.34	417.01	417.53	420.14	422.03	421.92	422.03
	Initial Effective Stress, σ'_i (kPa /psf)	2,799.30	2,850.66	2,814.90	2,827.98	3,000.68	2,917.14	2,698.66	2,843.51	2,873.38	2,841.45
	Final Effective Stress, σ'_f (kPa/psf)	3,380.10	3,361.86	3,455.70	3,489.18	3,549.08	3,585.54	3,424.66	3,225.11	3,228.58	3,226.65
Elastic Method											
Modulus, E (kPa/psf)=		Strain									
		Settlement (m / ft)									
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)											
OCR Manual Input Value											
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)											
Modified Primary Compression Index, C_{cc}											
Modified Recompression Index, C_{re}											
Modified Secondary Compression Index, $C_{\alpha\alpha}$											
ratio of t_2 / t_1											
Settlements											
Primary Settlement, (m / ft)											
Secondary Settlement (m / ft)											
Total Settlement (m / ft)											
Elastic or Plastic (E/P)											
Settlement of Layer 6 (m / ft)											
	Layer No. 7	Zone2-Above-GW-2									
	Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2	
	Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	
	Midpoint Elevation, (m / ft)	417.54	416.81	416.79	416.38	415.05	415.56	418.18	420.07	419.38	420.07
	Initial Effective Stress, σ'_i (kPa /psf)	2,960.26	3,011.14	2,975.86	2,988.70	3,161.21	3,078.59	2,859.43	3,004.08	3,081.71	3,002.02
	Final Effective Stress, σ'_f (kPa/psf)	3,541.06	3,522.34	3,616.66	3,649.90	3,709.61	3,746.99	3,585.43	3,385.68	3,436.91	3,387.22
Elastic Method											
Modulus, E (kPa/psf)=		Strain									
		Settlement (m / ft)									
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)											
OCR Manual Input Value											
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)											
Modified Primary Compression Index, C_{cc}											
Modified Recompression Index, C_{re}											
Modified Secondary Compression Index, $C_{\alpha\alpha}$											
ratio of t_2 / t_1											
Settlements											
Primary Settlement, (m / ft)											
Secondary Settlement (m / ft)											
Total Settlement (m / ft)											
Elastic or Plastic (E/P)											
Settlement of Layer 7 (m / ft)											

Written by: **Yiwen Cao** Date: **12/17/2009** Reviewed by: **R. Kulasingam/Jay Beech** Date: **12/17/2009**

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

Layer No. 8 Zone2-Above-GW-3											
Initial Stress Reference Layer (top of layer)		2	2	2	2	2	2	2	2	2	2
Final Stress Reference Layer (top of layer)		1	1	1	1	1	1	1	1	1	1
Midpoint Elevation, (m / ft)		415.57	414.86	414.82	414.42	413.10	413.59	416.22	418.11	416.84	418.11
Initial Effective Stress, σ'_i (kPa / psf)		3,121.22	3,171.62	3,136.82	3,149.42	3,321.74	3,240.03	3,020.20	3,164.66	3,290.04	3,162.60
Final Effective Stress, σ'_f (kPa/psf)		3,702.02	3,682.82	3,777.62	3,810.62	3,870.14	3,908.43	3,746.20	3,546.26	3,645.24	3,547.80
Elastic Method											
Modulus, E (kPa/psf)=											
Strain											
Settlement (m / ft)											
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)		MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value		2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)		2,370	2,323	2,365	2,356	2,296	2,325	2,394	2,113	2,328	2,113
Modified Primary Compression Index, C_{cc}		0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460
Modified Recompression Index, C_{re}		0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014
Modified Secondary Compression Index, $C_{\alpha\alpha}$		0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%
ratio of t_2 / t_1		8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75
Settlements											
Primary Settlement, (m / ft)		0.067	0.058	0.073	0.075	0.060	0.074	0.084	0.045	0.052	0.045
Secondary Settlement (m / ft)		0.017	0.017	0.017	0.017	0.017	0.017	0.017	0.017	0.022	0.017
Total Settlement (m / ft)		0.084	0.075	0.090	0.091	0.077	0.091	0.101	0.061	0.074	0.062
Elastic or Plastic (E/P)											
Settlement of Layer 8 (m / ft)		1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D
		0.084	0.075	0.090	0.091	0.077	0.091	0.101	0.061	0.074	0.062
Layer No. 9 Zone2-Above-GW-4											
Initial Stress Reference Layer (top of layer)		2	2	2	2	2	2	2	2	2	2
Final Stress Reference Layer (top of layer)		1	1	1	1	1	1	1	1	1	1
Midpoint Elevation, (m / ft)		413.61	412.90	412.86	412.46	411.14	411.62	414.26	416.16	414.30	416.16
Initial Effective Stress, σ'_i (kPa / psf)		3,282.18	3,332.10	3,297.78	3,310.14	3,482.26	3,401.47	3,180.97	3,325.23	3,498.37	3,323.17
Final Effective Stress, σ'_f (kPa/psf)		3,862.98	3,843.30	3,938.58	3,971.34	4,030.66	4,069.87	3,906.97	3,706.83	3,853.57	3,708.37
Elastic Method											
Modulus, E (kPa/psf)=											
Strain											
Settlement (m / ft)											
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)		MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value		2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)		2,692	2,644	2,687	2,677	2,617	2,648	2,715	2,434	2,745	2,434
Modified Primary Compression Index, C_{cc}		0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460
Modified Recompression Index, C_{re}		0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014
Modified Secondary Compression Index, $C_{\alpha\alpha}$		0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%
ratio of t_2 / t_1		8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75
Settlements											
Primary Settlement, (m / ft)		0.064	0.056	0.070	0.071	0.057	0.071	0.081	0.043	0.049	0.043
Secondary Settlement (m / ft)		0.017	0.017	0.017	0.017	0.017	0.017	0.017	0.017	0.022	0.017
Total Settlement (m / ft)		0.081	0.073	0.086	0.088	0.074	0.087	0.097	0.059	0.071	0.060
Elastic or Plastic (E/P)											
Settlement of Layer 9 (m / ft)		1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D
		0.081	0.073	0.086	0.088	0.074	0.087	0.097	0.059	0.071	0.060
Layer No. 10 Zone2-Above-GW-5											
Initial Stress Reference Layer (top of layer)		2	2	2	2	2	2	2	2	2	2
Final Stress Reference Layer (top of layer)		1	1	1	1	1	1	1	1	1	1
Midpoint Elevation, (m / ft)		411.65	410.94	410.90	410.50	409.18	409.65	412.30	414.20	411.76	414.20
Initial Effective Stress, σ'_i (kPa / psf)		3,443.15	3,492.57	3,458.75	3,470.86	3,642.79	3,562.92	3,341.74	3,485.81	3,706.70	3,483.75
Final Effective Stress, σ'_f (kPa/psf)		4,023.95	4,003.77	4,099.55	4,132.06	4,191.19	4,231.32	4,067.74	3,867.41	4,061.90	3,868.95
Elastic Method											
Modulus, E (kPa/psf)=											
Strain											
Settlement (m / ft)											
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)		MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value		2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)		3,014	2,965	3,009	2,999	2,939	2,971	3,037	2,756	3,162	2,756
Modified Primary Compression Index, C_{cc}		0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460
Modified Recompression Index, C_{re}		0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014
Modified Secondary Compression Index, $C_{\alpha\alpha}$		0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%
ratio of t_2 / t_1		8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75
Settlements											
Primary Settlement, (m / ft)		0.061	0.053	0.067	0.068	0.055	0.068	0.077	0.041	0.046	0.041
Secondary Settlement (m / ft)		0.017	0.017	0.017	0.017	0.017	0.017	0.017	0.017	0.022	0.017
Total Settlement (m / ft)		0.078	0.070	0.083	0.085	0.072	0.085	0.094	0.057	0.068	0.058
Elastic or Plastic (E/P)											
Settlement of Layer 10 (m / ft)		1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D
		0.078	0.070	0.083	0.085	0.072	0.085	0.094	0.057	0.068	0.058

Written by: **Yiwen Cao** Date: **12/17/2009** Reviewed by: **R. Kulasingam/Jay Beech** Date: **12/17/2009**

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

	Layer No.	11 Zone2-Above-GW-6									
	Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2	2
	Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1
	Midpoint Elevation, (m / ft)	409.68	408.99	408.93	408.54	407.22	407.68	410.34	412.24	409.22	412.24
	Initial Effective Stress, σ'_i (kPa /psf)	3,604.11	3,653.05	3,619.71	3,631.58	3,803.32	3,724.36	3,502.51	3,646.38	3,915.03	3,644.32
	Final Effective Stress, σ'_f (kPa/psf)	4,184.91	4,164.25	4,260.51	4,292.78	4,351.72	4,392.76	4,228.51	4,027.98	4,270.23	4,029.52
Elastic Method											
Modulus, E (kPa/psf)=											
Strain											
Settlement (m / ft)											
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)		MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value		1.0	1.0	1.0	1.0	2.0	1.0	1.0	2.0	1.0	2.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)		1,668	1,643	1,666	1,660	3,260	1,647	1,679	3,077	1,789	3,077
Modified Primary Compression Index, C_{cc}		0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460
Modified Recompression Index, C_{re}		0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014
Modified Secondary Compression Index, $C_{\alpha\alpha}$		0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%
ratio of t2 / t1		8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75
Settlements											
Primary Settlement, (m / ft)		0.059	0.051	0.064	0.065	0.053	0.065	0.074	0.039	0.044	0.039
Secondary Settlement (m / ft)		0.017	0.017	0.017	0.017	0.017	0.017	0.017	0.017	0.022	0.017
Total Settlement (m / ft)		0.075	0.068	0.081	0.082	0.069	0.082	0.091	0.056	0.066	0.056
Elastic or Plastic (E/P)											
Settlement of Layer 11 (m / ft)		1-D 0.075	1-D 0.068	1-D 0.081	1-D 0.082	1-D 0.069	1-D 0.082	1-D 0.091	1-D 0.056	1-D 0.066	1-D 0.056
	Layer No.	12 Zone2-Above-GW-7									
	Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2	2
	Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1
	Midpoint Elevation, (m / ft)	407.72	407.03	406.97	406.58	405.27	405.71	408.38	410.28	406.68	410.28
	Initial Effective Stress, σ'_i (kPa /psf)	3,765.07	3,813.53	3,780.67	3,792.30	3,963.85	3,885.80	3,663.27	3,806.96	4,123.35	3,804.90
	Final Effective Stress, σ'_f (kPa/psf)	4,345.87	4,324.73	4,421.47	4,453.50	4,512.25	4,554.20	4,389.27	4,188.56	4,478.55	4,190.10
Elastic Method											
Modulus, E (kPa/psf)=											
Strain											
Settlement (m / ft)											
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)		MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value		1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)		1,829	1,804	1,827	1,821	1,790	1,808	1,840	1,699	1,998	1,699
Modified Primary Compression Index, C_{cc}		0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460
Modified Recompression Index, C_{re}		0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014
Modified Secondary Compression Index, $C_{\alpha\alpha}$		0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%
ratio of t2 / t1		8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75
Settlements											
Primary Settlement, (m / ft)		0.056	0.049	0.061	0.063	0.051	0.062	0.071	0.037	0.042	0.038
Secondary Settlement (m / ft)		0.017	0.017	0.017	0.017	0.017	0.017	0.017	0.017	0.022	0.017
Total Settlement (m / ft)		0.073	0.066	0.078	0.080	0.067	0.079	0.088	0.054	0.064	0.055
Elastic or Plastic (E/P)											
Settlement of Layer 12 (m / ft)		1-D 0.073	1-D 0.066	1-D 0.078	1-D 0.080	1-D 0.067	1-D 0.079	1-D 0.088	1-D 0.054	1-D 0.064	1-D 0.055
	Layer No.	13 Zone2-Above-GW-8									
	Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2	2
	Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1
	Midpoint Elevation, (m / ft)	405.76	405.07	405.01	404.62	403.31	403.74	406.42	408.32	404.14	408.32
	Initial Effective Stress, σ'_i (kPa /psf)	3,926	3,974	3,942	3,953	4,124	4,047	3,824	3,968	4,332	3,965
	Final Effective Stress, σ'_f (kPa/psf)	4,507	4,485	4,582	4,614	4,673	4,716	4,550	4,349	4,687	4,351
Elastic Method											
Modulus, E (kPa/psf)=											
Strain											
Settlement (m / ft)											
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)		MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value		1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)		1,990	1,964	1,987	1,981	1,951	1,970	2,001	1,859	2,206	1,859
Modified Primary Compression Index, C_{cc}		0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460
Modified Recompression Index, C_{re}		0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014
Modified Secondary Compression Index, $C_{\alpha\alpha}$		0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%
ratio of t2 / t1		8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75
Settlements											
Primary Settlement, (m / ft)		0.054	0.047	0.059	0.061	0.049	0.060	0.068	0.036	0.040	0.036
Secondary Settlement (m / ft)		0.017	0.017	0.017	0.017	0.017	0.017	0.017	0.017	0.022	0.017
Total Settlement (m / ft)		0.071	0.064	0.076	0.077	0.066	0.077	0.085	0.053	0.062	0.053
Elastic or Plastic (E/P)											
Settlement of Layer 13 (m / ft)		P 1-D 0.071	P 1-D 0.064	P 1-D 0.076	P 1-D 0.077	P 1-D 0.066	P 1-D 0.077	P 1-D 0.085	P 1-D 0.053	P 1-D 0.062	P 1-D 0.053

Written by: **Yiwen Cao** Date: **12/17/2009** Reviewed by: **R. Kulasingam/Jay Beech** Date: **12/17/2009**

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

	Layer No.	14 Zone2-Above-GW-9									
	Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2	
	Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	
	Midpoint Elevation, (m / ft)	403.80	403.12	403.05	402.66	401.35	401.78	404.46	406.37	401.60	406.37
	Initial Effective Stress, σ'_i (kPa / psf)	4,087	4,134	4,103	4,114	4,285	4,209	3,985	4,128	4,540	4,126
	Final Effective Stress, σ'_f (kPa/psf)	4,668	4,646	4,743	4,775	4,833	4,877	4,711	4,510	4,895	4,511
Elastic Method											
Modulus, E (kPa/psf)=											
Strain											
Settlement (m / ft)											
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)		MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value		1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)		2,151	2,125	2,148	2,142	2,111	2,131	2,161	2,020	2,414	2,020
Modified Primary Compression Index, C_{cc}		0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460
Modified Recompression Index, C_{re}		0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014
Modified Secondary Compression Index, $C_{\alpha\alpha}$		0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%
ratio of t_2 / t_1		8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75
Settlements											
Primary Settlement, (m / ft)		0.052	0.046	0.057	0.058	0.047	0.058	0.066	0.035	0.038	0.035
Secondary Settlement (m / ft)		0.017	0.017	0.017	0.017	0.017	0.017	0.017	0.017	0.022	0.017
Total Settlement (m / ft)		0.069	0.062	0.074	0.075	0.064	0.075	0.082	0.051	0.060	0.052
Elastic or Plastic (E/P)											
1-D		P	P	P	P	P	P	P	P	P	P
Settlement of Layer 14 (m / ft)		0.069	0.062	0.074	0.075	0.064	0.075	0.082	0.051	0.060	0.052
	Layer No.	15 Zone2-Above-GW-10									
	Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2	2
	Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1
	Midpoint Elevation, (m / ft)	401.83	401.16	401.08	400.70	399.39	399.81	402.49	404.41	399.05	404.41
	Initial Effective Stress, σ'_i (kPa / psf)	4,248	4,295	4,264	4,274	4,445	4,370	4,146	4,289	4,748	4,287
	Final Effective Stress, σ'_f (kPa/psf)	4,829	4,806	4,904	4,936	4,994	5,039	4,872	4,670	5,104	4,672
Elastic Method											
Modulus, E (kPa/psf)=											
Strain											
Settlement (m / ft)											
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)		MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value		1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)		2,312	2,285	2,309	2,303	2,272	2,293	2,322	2,181	2,623	2,181
Modified Primary Compression Index, C_{cc}		0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460
Modified Recompression Index, C_{re}		0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014
Modified Secondary Compression Index, $C_{\alpha\alpha}$		0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%
ratio of t_2 / t_1		8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75
Settlements											
Primary Settlement, (m / ft)		0.050	0.044	0.055	0.056	0.045	0.056	0.063	0.033	0.037	0.034
Secondary Settlement (m / ft)		0.017	0.017	0.017	0.017	0.017	0.017	0.017	0.017	0.022	0.017
Total Settlement (m / ft)		0.067	0.061	0.072	0.073	0.062	0.073	0.080	0.050	0.058	0.050
Elastic or Plastic (E/P)											
1-D		P	P	P	P	P	P	P	P	P	P
Settlement of Layer 15 (m / ft)		0.067	0.061	0.072	0.073	0.062	0.073	0.080	0.050	0.058	0.050
	Layer No.	16 Zone2-Above-GW-11									
	Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2	2
	Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1
	Midpoint Elevation, (m / ft)	399.87	399.20	399.12	398.74	397.43	397.84	400.53	402.45	396.51	402.45
	Initial Effective Stress, σ'_i (kPa / psf)	4,409	4,455	4,425	4,435	4,606	4,532	4,306	4,449	4,957	4,447
	Final Effective Stress, σ'_f (kPa/psf)	4,990	4,967	5,065	5,096	5,154	5,200	5,032	4,831	5,312	4,832
Elastic Method											
Modulus, E (kPa/psf)=											
Strain											
Settlement (m / ft)											
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)		MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value		1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)		2,473	2,445	2,470	2,464	2,432	2,454	2,483	2,341	2,831	2,341
Modified Primary Compression Index, C_{cc}		0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460
Modified Recompression Index, C_{re}		0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014
Modified Secondary Compression Index, $C_{\alpha\alpha}$		0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%
ratio of t_2 / t_1		8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75
Settlements											
Primary Settlement, (m / ft)		0.049	0.042	0.053	0.054	0.044	0.054	0.061	0.032	0.035	0.032
Secondary Settlement (m / ft)		0.017	0.017	0.017	0.017	0.017	0.017	0.017	0.017	0.022	0.017
Total Settlement (m / ft)		0.065	0.059	0.070	0.071	0.061	0.071	0.078	0.049	0.057	0.049
Elastic or Plastic (E/P)											
1-D		P	P	P	P	P	P	P	P	P	P
Settlement of Layer 16 (m / ft)		0.065	0.059	0.070	0.071	0.061	0.071	0.078	0.049	0.057	0.049

Written by: **Yiwen Cao** Date: **12/17/2009** Reviewed by: **R. Kulasingam/Jay Beech** Date: **12/17/2009**

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

	Layer No.	17 Zone2-Above-GW-12									
	Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2	2
	Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1
	Midpoint Elevation, (m / ft)	397.91	397.24	397.16	396.78	395.48	395.87	398.57	400.49	393.97	400.49
	Initial Effective Stress, σ'_i (kPa /psf)	4,570	4,616	4,585	4,596	4,766	4,693	4,467	4,610	5,165	4,608
	Final Effective Stress, σ'_f (kPa/psf)	5,151	5,127	5,226	5,257	5,315	5,361	5,193	4,991	5,520	4,993
Elastic Method											
Modulus, E (kPa/psf)=											
Strain											
Settlement (m / ft)											
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)		MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value		1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)		2,634	2,606	2,631	2,624	2,593	2,616	2,644	2,502	3,039	2,502
Modified Primary Compression Index, C_{cc}		0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460
Modified Recompression Index, C_{re}		0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014
Modified Secondary Compression Index, $C_{\alpha\alpha}$		0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%
ratio of t2 / t1		8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75
Settlements											
Primary Settlement, (m / ft)		0.047	0.041	0.051	0.053	0.043	0.052	0.059	0.031	0.034	0.031
Secondary Settlement (m / ft)		0.017	0.017	0.017	0.017	0.017	0.017	0.017	0.017	0.022	0.017
Total Settlement (m / ft)		0.064	0.058	0.068	0.069	0.059	0.069	0.076	0.048	0.056	0.048
Elastic or Plastic (E/P)											
1-D		P	P	P	P	P	P	P	P	P	P
Settlement of Layer 17 (m / ft)		0.064	0.058	0.068	0.069	0.059	0.069	0.076	0.048	0.056	0.048
	Layer No.	18 Zone2-Above-GW-13									
	Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2	2
	Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1
	Midpoint Elevation, (m / ft)	395.94	395.29	395.19	394.82	393.52	393.90	396.61	398.53	391.43	398.53
	Initial Effective Stress, σ'_i (kPa /psf)	4,731	4,776	4,746	4,757	4,927	4,854	4,628	4,770	5,373	4,768
	Final Effective Stress, σ'_f (kPa/psf)	5,312	5,288	5,387	5,418	5,475	5,523	5,354	5,152	5,729	5,154
Elastic Method											
Modulus, E (kPa/psf)=											
Strain											
Settlement (m / ft)											
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)		MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value		1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)		2,794	2,766	2,792	2,785	2,753	2,777	2,804	2,662	3,248	2,662
Modified Primary Compression Index, C_{cc}		0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460
Modified Recompression Index, C_{re}		0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014
Modified Secondary Compression Index, $C_{\alpha\alpha}$		0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%
ratio of t2 / t1		8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75
Settlements											
Primary Settlement, (m / ft)		0.045	0.040	0.050	0.051	0.041	0.051	0.057	0.030	0.032	0.030
Secondary Settlement (m / ft)		0.017	0.017	0.017	0.017	0.017	0.017	0.017	0.017	0.022	0.017
Total Settlement (m / ft)		0.062	0.057	0.066	0.068	0.058	0.068	0.074	0.047	0.054	0.047
Elastic or Plastic (E/P)											
1-D		P	P	P	P	P	P	P	P	P	P
Settlement of Layer 18 (m / ft)		0.062	0.057	0.066	0.068	0.058	0.068	0.074	0.047	0.054	0.047
	Layer No.	19 Zone2-Above-GW-14									
	Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2	2
	Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1
	Midpoint Elevation, (m / ft)	393.98	393.33	393.23	392.86	391.56	391.93	394.65	396.57	388.89	396.57
	Initial Effective Stress, σ'_i (kPa /psf)	4,892	4,937	4,907	4,917	5,088	5,016	4,789	4,931	5,582	4,929
	Final Effective Stress, σ'_f (kPa/psf)	5,473	5,448	5,548	5,579	5,636	5,684	5,515	5,313	5,937	5,314
Elastic Method											
Modulus, E (kPa/psf)=											
Strain											
Settlement (m / ft)											
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)		MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value		1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)		2,955	2,927	2,953	2,946	2,914	2,938	2,965	2,823	3,456	2,823
Modified Primary Compression Index, C_{cc}		0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460
Modified Recompression Index, C_{re}		0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014
Modified Secondary Compression Index, $C_{\alpha\alpha}$		0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%
ratio of t2 / t1		8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75
Settlements											
Primary Settlement, (m / ft)		0.044	0.039	0.048	0.049	0.040	0.049	0.055	0.029	0.031	0.029
Secondary Settlement (m / ft)		0.017	0.017	0.017	0.017	0.017	0.017	0.017	0.017	0.022	0.017
Total Settlement (m / ft)		0.061	0.055	0.065	0.066	0.057	0.066	0.072	0.046	0.053	0.046
Elastic or Plastic (E/P)											
1-D		P	P	P	P	P	P	P	P	P	P
Settlement of Layer 19 (m / ft)		0.061	0.055	0.065	0.066	0.057	0.066	0.072	0.046	0.053	0.046

Written by: **Yiwen Cao** Date: **12/17/2009** Reviewed by: **R. Kulasingam/Jay Beech** Date: **12/17/2009**

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

	Layer No.	20 Zone2-Above-GW-15									
	Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2	2
	Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1
	Midpoint Elevation, (m / ft)	392.02	391.37	391.27	390.90	389.60	389.96	392.69	394.62	386.35	394.62
	Initial Effective Stress, σ'_i (kPa /psf)	5,053	5,097	5,068	5,078	5,248	5,177	4,949	5,092	5,790	5,090
	Final Effective Stress, σ'_f (kPa/psf)	5,634	5,609	5,709	5,739	5,796	5,846	5,675	5,473	6,145	5,475
Elastic Method											
Modulus, E (kPa/psf)=											
Strain											
Settlement (m / ft)											
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)		MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value		1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)		3,116	3,087	3,114	3,107	3,075	3,100	3,126	2,984	3,664	2,984
Modified Primary Compression Index, C_{cc}		0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460
Modified Recompression Index, C_{re}		0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014
Modified Secondary Compression Index, $C_{\alpha\alpha}$		0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%
ratio of t2 / t1		8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75
Settlements											
Primary Settlement, (m / ft)		0.043	0.037	0.047	0.048	0.039	0.048	0.054	0.028	0.030	0.029
Secondary Settlement (m / ft)		0.017	0.017	0.017	0.017	0.017	0.017	0.017	0.017	0.022	0.017
Total Settlement (m / ft)		0.059	0.054	0.064	0.065	0.056	0.065	0.070	0.045	0.052	0.045
Elastic or Plastic (E/P)											
1-D		P	P	P	P	P	P	P	P	P	P
Settlement of Layer 20 (m / ft)		0.059	0.054	0.064	0.065	0.056	0.065	0.070	0.045	0.052	0.045
	Layer No.	21 Zone2-Above-GW-16									
	Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2	2
	Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1
	Midpoint Elevation, (m / ft)	390.05	389.42	389.30	388.94	387.65	387.99	390.73	392.66	383.81	392.66
	Initial Effective Stress, σ'_i (kPa /psf)	5,214	5,258	5,229	5,239	5,409	5,339	5,110	5,252	5,998	5,250
	Final Effective Stress, σ'_f (kPa/psf)	5,795	5,769	5,870	5,900	5,957	6,007	5,836	5,634	6,354	5,635
Elastic Method											
Modulus, E (kPa/psf)=											
Strain											
Settlement (m / ft)											
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)		MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value		1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)		3,277	3,248	3,275	3,267	3,235	3,261	3,287	3,144	3,873	3,144
Modified Primary Compression Index, C_{cc}		0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460
Modified Recompression Index, C_{re}		0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014
Modified Secondary Compression Index, $C_{\alpha\alpha}$		0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%
ratio of t2 / t1		8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75
Settlements											
Primary Settlement, (m / ft)		0.041	0.036	0.045	0.047	0.038	0.046	0.052	0.027	0.029	0.028
Secondary Settlement (m / ft)		0.017	0.017	0.017	0.017	0.017	0.017	0.017	0.017	0.022	0.017
Total Settlement (m / ft)		0.058	0.053	0.062	0.063	0.055	0.063	0.069	0.044	0.051	0.044
Elastic or Plastic (E/P)											
1-D		P	P	P	P	P	P	P	P	P	P
Settlement of Layer 21 (m / ft)		0.058	0.053	0.062	0.063	0.055	0.063	0.069	0.044	0.051	0.044
	Layer No.	22 Zone2-Above-GW-17									
	Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2	2
	Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1
	Midpoint Elevation, (m / ft)	388.09	387.46	387.34	386.98	385.69	386.02	388.77	390.70	381.27	390.70
	Initial Effective Stress, σ'_i (kPa /psf)	5,375	5,418	5,390	5,399	5,569	5,500	5,271	5,413	6,207	5,411
	Final Effective Stress, σ'_f (kPa/psf)	5,955	5,930	6,031	6,061	6,118	6,169	5,997	5,794	6,562	5,796
Elastic Method											
Modulus, E (kPa/psf)=											
Strain											
Settlement (m / ft)											
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)		MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value		1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)		3,438	3,408	3,436	3,428	3,396	3,423	3,448	3,305	4,081	3,305
Modified Primary Compression Index, C_{cc}		0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460
Modified Recompression Index, C_{re}		0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014
Modified Secondary Compression Index, $C_{\alpha\alpha}$		0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%
ratio of t2 / t1		8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75
Settlements											
Primary Settlement, (m / ft)		0.040	0.035	0.044	0.045	0.037	0.045	0.051	0.027	0.028	0.027
Secondary Settlement (m / ft)		0.017	0.017	0.017	0.017	0.017	0.017	0.017	0.017	0.022	0.017
Total Settlement (m / ft)		0.057	0.052	0.061	0.062	0.054	0.062	0.067	0.043	0.050	0.044
Elastic or Plastic (E/P)											
1-D		P	P	P	P	P	P	P	P	P	P
Settlement of Layer 22 (m / ft)		0.057	0.052	0.061	0.062	0.054	0.062	0.067	0.043	0.050	0.044

Written by: **Yiwen Cao** Date: **12/17/2009** Reviewed by: **R. Kulasingam/Jay Beech** Date: **12/17/2009**

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

Layer No.	23	Zone3-Above-GW-1								
Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2	2
Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1
Midpoint Elevation, (m / ft)	387.11	386.48	386.36	386.00	384.71	385.04	387.79	389.72	380.00	389.72
Initial Effective Stress, σ'_i (kPa / psf)	5,455	5,499	5,471	5,480	5,649	5,581	5,351	5,493	6,311	5,491
Final Effective Stress, σ'_f (kPa/psf)	6,036	6,010	6,112	6,141	6,198	6,249	6,077	5,875	6,666	5,876
Elastic Method										
Modulus, E (kPa/psf)=										
Strain										
Settlement (m / ft)										
1-D Consolidation Theory (Plastic Method)										
Consolidation Properties										
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)	MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input										
Preconsolidation pressure, σ'_p (kPa / psf)	3,519	3,489	3,517	3,508	3,476	3,504	3,528	3,385	4,185	3,385
Modified Primary Compression Index, C_{cc}	0.380	0.380	0.380	0.380	0.380	0.380	0.380	0.380	0.380	0.380
Modified Recompression Index, C_{re}	0.021	0.021	0.021	0.021	0.021	0.021	0.021	0.021	0.021	0.021
Modified Secondary Compression Index, $C_{\alpha\alpha}$	0.70%	0.70%	0.70%	0.70%	0.70%	0.70%	0.70%	0.70%	0.70%	0.70%
ratio of t_2 / t_1	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75
Settlements										
Primary Settlement, (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Secondary Settlement (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Total Settlement (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Elastic or Plastic (E/P)	P	P	P	P	P	P	P	P	P	P
1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D
Settlement of Layer 23 (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Layer No.	24	Zone3-Above-GW-2								
Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2	2
Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1
Midpoint Elevation, (m / ft)	387.11	386.48	386.36	386.00	384.71	385.04	387.79	389.72	380.00	389.72
Initial Effective Stress, σ'_i (kPa / psf)	5,455	5,499	5,471	5,480	5,649	5,581	5,351	5,493	6,311	5,491
Final Effective Stress, σ'_f (kPa/psf)	6,036	6,010	6,112	6,141	6,198	6,249	6,077	5,875	6,666	5,876
Elastic Method										
Modulus, E (kPa/psf)=										
Strain										
Settlement (m / ft)										
1-D Consolidation Theory (Plastic Method)										
Consolidation Properties										
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)	MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input										
Preconsolidation pressure, σ'_p (kPa / psf)	3,519	3,489	3,517	3,508	3,476	3,504	3,528	3,385	4,185	3,385
Modified Primary Compression Index, C_{cc}	0.380	0.380	0.380	0.380	0.380	0.380	0.380	0.380	0.380	0.380
Modified Recompression Index, C_{re}	0.021	0.021	0.021	0.021	0.021	0.021	0.021	0.021	0.021	0.021
Modified Secondary Compression Index, $C_{\alpha\alpha}$	0.70%	0.70%	0.70%	0.70%	0.70%	0.70%	0.70%	0.70%	0.70%	0.70%
ratio of t_2 / t_1	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75
Settlements										
Primary Settlement, (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Secondary Settlement (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Total Settlement (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Elastic or Plastic (E/P)	P	P	P	P	P	P	P	P	P	P
1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D
Settlement of Layer 24 (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Layer No.	25	Zone2-Below-GW-18								
Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2	2
Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1
Midpoint Elevation, (m / ft)	383.76	383.36	383.20	382.94	382.04	382.22	384.27	387.29	380.00	387.29
Initial Effective Stress, σ'_i (kPa / psf)	5,520.82	5,559.66	5,532.75	5,539.89	5,701.81	5,636.28	5,420.43	5,540.63	6,310.80	5,538.57
Final Effective Stress, σ'_f (kPa/psf)	6,101.62	6,070.86	6,173.54	6,201.09	6,250.21	6,304.68	6,146.43	5,922.23	6,666.00	5,923.77
Elastic Method										
Modulus, E (kPa/psf)=										
Strain										
Settlement (m / ft)										
1-D Consolidation Theory (Plastic Method)										
Consolidation Properties										
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)	MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input										
Preconsolidation pressure, σ'_p (kPa / psf)	3,794	3,744	3,776	3,759	3,695	3,735	3,817	3,584	4,185	3,584
Modified Primary Compression Index, C_{cc}	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460
Modified Recompression Index, C_{re}	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014
Modified Secondary Compression Index, $C_{\alpha\alpha}$	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%
ratio of t_2 / t_1	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75
Settlements										
Primary Settlement, (m / ft)	0.134	0.110	0.138	0.138	0.098	0.126	0.177	0.065	0.000	0.065
Secondary Settlement (m / ft)	0.057	0.053	0.054	0.053	0.046	0.048	0.060	0.042	0.000	0.042
Total Settlement (m / ft)	0.191	0.163	0.193	0.190	0.144	0.175	0.237	0.106	0.000	0.107
Elastic or Plastic (E/P)	P	P	P	P	P	P	P	P	P	P
1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D
Settlement of Layer 25 (m / ft)	0.191	0.163	0.193	0.190	0.144	0.175	0.237	0.106	0.000	0.107

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: Honeywell Project: Onondaga Lake SCA Final Design Project/ Proposal No.: GJ4299 Task No.: 04

Layer No.	26	Zone2-Below-GW-19								
Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2	2
Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1
Midpoint Elevation, (m / ft)	377.06	377.13	376.87	376.81	376.69	376.57	377.22	382.43	380.00	382.43
Initial Effective Stress, σ'_i (kPa / psf)	5,652.14	5,681.87	5,656.72	5,659.94	5,806.67	5,746.92	5,558.61	5,635.88	6,310.80	5,633.82
Final Effective Stress, σ'_f (kPa/psf)	6,232.94	6,193.07	6,297.51	6,321.14	6,355.07	6,415.32	6,284.61	6,017.48	6,666.00	6,019.02
Elastic Method										
Modulus, E (kPa/psf)=		Strain								
		Settlement (m / ft)								
1-D Consolidation Theory (Plastic Method)										
Consolidation Properties										
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)	MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input										
Preconsolidation pressure, σ'_p (kPa / psf)	4,343	4,256	4,295	4,262	4,134	4,198	4,395	3,983	4,185	3,983
Modified Primary Compression Index, C_{cc}	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460
Modified Recompression Index, C_{re}	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014
Modified Secondary Compression Index, $C_{\alpha\alpha}$	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%
ratio of t_2 / t_1	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75
Settlements										
Primary Settlement, (m / ft)	0.131	0.107	0.136	0.135	0.096	0.124	0.173	0.064	0.000	0.064
Secondary Settlement (m / ft)	0.057	0.053	0.054	0.053	0.046	0.048	0.060	0.042	0.000	0.042
Total Settlement (m / ft)	0.188	0.161	0.190	0.188	0.142	0.172	0.233	0.105	0.000	0.106
Elastic or Plastic (E/P)										
Settlement of Layer 26 (m / ft)	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D
	0.188	0.161	0.190	0.188	0.142	0.172	0.233	0.105	0.000	0.106
Layer No.	27	Zone3-Below-GW-3								
Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2	2
Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1
Midpoint Elevation, (m / ft)	364.71	367.54	365.00	365.51	368.31	366.05	364.35	380.00	380.00	380.00
Initial Effective Stress, σ'_i (kPa / psf)	5,894.30	5,869.78	5,889.42	5,881.56	5,970.82	5,953.26	5,810.86	5,683.51	6,310.80	5,681.45
Final Effective Stress, σ'_f (kPa/psf)	6,475.10	6,380.98	6,530.22	6,542.76	6,519.22	6,621.66	6,536.86	6,065.11	6,666.00	6,066.65
Elastic Method										
Modulus, E (kPa/psf)=		Strain								
		Settlement (m / ft)								
1-D Consolidation Theory (Plastic Method)										
Consolidation Properties										
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)	MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input										
Preconsolidation pressure, σ'_p (kPa / psf)	4,714	4,576	4,644	4,596	4,403	4,502	4,786	4,182	4,185	4,182
Modified Primary Compression Index, C_{cc}	0.380	0.380	0.380	0.380	0.380	0.380	0.380	0.380	0.380	0.380
Modified Recompression Index, C_{re}	0.021	0.021	0.021	0.021	0.021	0.021	0.021	0.021	0.021	0.021
Modified Secondary Compression Index, $C_{\alpha\alpha}$	0.70%	0.70%	0.70%	0.70%	0.70%	0.70%	0.70%	0.70%	0.70%	0.70%
ratio of t_2 / t_1	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75
Settlements										
Primary Settlement, (m / ft)	0.279	0.178	0.297	0.290	0.165	0.271	0.363	0.000	0.000	0.000
Secondary Settlement (m / ft)	0.119	0.085	0.115	0.109	0.075	0.102	0.123	0.000	0.000	0.000
Total Settlement (m / ft)	0.398	0.264	0.412	0.399	0.240	0.372	0.486	0.000	0.000	0.000
Elastic or Plastic (E/P)										
Settlement of Layer 27 (m / ft)	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D
	0.398	0.264	0.412	0.399	0.240	0.372	0.486	0.000	0.000	0.000

Written by: **Yiwen Cao** Date: **12/17/2009** Reviewed by: **R. Kulasingam/Jay Beech** Date: **12/17/2009**

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

LAYER SETTLEMENT	Layer No.	Material										
	1	Cover										
	2	Dredge										
	3	Gravel										
	4	Clay										
	5	Dike										
	6	Zone2-Above-GW-1	0.091	0.081	0.097	0.099	0.082	0.098	0.110	0.004	0.004	0.004
	7	Zone2-Above-GW-2	0.087	0.078	0.093	0.095	0.079	0.094	0.105	0.064	0.077	0.064
	8	Zone2-Above-GW-3	0.084	0.075	0.090	0.091	0.077	0.091	0.101	0.061	0.074	0.062
	9	Zone2-Above-GW-4	0.081	0.073	0.086	0.088	0.074	0.087	0.097	0.059	0.071	0.060
	10	Zone2-Above-GW-5	0.078	0.070	0.083	0.085	0.072	0.085	0.094	0.057	0.068	0.058
	11	Zone2-Above-GW-6	0.075	0.068	0.081	0.082	0.069	0.082	0.091	0.056	0.066	0.056
	12	Zone2-Above-GW-7	0.073	0.066	0.078	0.080	0.067	0.079	0.088	0.054	0.064	0.055
	13	Zone2-Above-GW-8	0.071	0.064	0.076	0.077	0.066	0.077	0.085	0.053	0.062	0.053
	14	Zone2-Above-GW-9	0.069	0.062	0.074	0.075	0.064	0.075	0.082	0.051	0.060	0.052
	15	Zone2-Above-GW-10	0.067	0.061	0.072	0.073	0.062	0.073	0.080	0.050	0.058	0.050
	16	Zone2-Above-GW-11	0.065	0.059	0.070	0.071	0.061	0.071	0.078	0.049	0.057	0.049
	17	Zone2-Above-GW-12	0.064	0.058	0.068	0.069	0.059	0.069	0.076	0.048	0.056	0.048
	18	Zone2-Above-GW-13	0.062	0.057	0.066	0.068	0.058	0.068	0.074	0.047	0.054	0.047
	19	Zone2-Above-GW-14	0.061	0.055	0.065	0.066	0.057	0.066	0.072	0.046	0.053	0.046
	20	Zone2-Above-GW-15	0.059	0.054	0.064	0.065	0.056	0.065	0.070	0.045	0.052	0.045
	21	Zone2-Above-GW-16	0.058	0.053	0.062	0.063	0.055	0.063	0.069	0.044	0.051	0.044
	22	Zone2-Above-GW-17	0.057	0.052	0.061	0.062	0.054	0.062	0.067	0.043	0.050	0.044
	23	Zone3-Above-GW-1	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	24	Zone3-Above-GW-2	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	25	Zone2-Below-GW-18	0.191	0.163	0.193	0.190	0.144	0.175	0.237	0.106	0.000	0.107
	26	Zone2-Below-GW-19	0.188	0.161	0.190	0.188	0.142	0.172	0.233	0.105	0.000	0.106
	27	Zone3-Below-GW-3	0.398	0.264	0.412	0.399	0.240	0.372	0.486	0.000	0.000	0.000
	28											
	29	Soil Above GW										
30	Soil Below GW											
	TOTAL SETTLEMENT		1.98	1.67	2.08	2.09	1.64	2.02	2.40	1.04	0.98	1.05
POST-SETTLEMENT ELEVATION(M/FT)	Line 1		453.78	453.21	453.56	453.42	453.04	453.48	453.95	455.96	456.03	455.96
	Line 2		448.94	448.95	448.22	447.91	448.47	447.91	447.90	452.78	453.07	452.75
	Line 3		421.47	421.48	420.75	420.44	421.00	420.44	421.92	425.31	425.60	425.29
	Line 4		420.24	420.06	419.41	419.16	419.25	418.72	420.52	423.97	424.18	423.96
	Line 5		418.50	418.08	417.66	417.23	416.39	416.49	418.72	421.97	422.21	421.96
	Line 6		418.50	418.08	417.65	417.23	416.35	416.49	418.72	421.97	422.21	421.96
	Line 7		416.63	416.20	415.78	415.37	414.48	414.62	416.87	420.01	419.68	420.01
	Line 8		414.75	414.32	413.91	413.51	412.60	412.74	415.02	418.12	417.21	418.11
	Line 9		412.87	412.44	412.04	411.64	410.72	410.86	413.16	416.22	414.75	416.21
	Line 10		410.99	410.55	410.16	409.77	408.83	408.98	411.29	414.32	412.28	414.32
	Line 11		409.11	408.67	408.28	407.89	406.95	407.10	409.43	412.42	409.80	412.42
	Line 12		407.22	406.78	406.40	406.01	405.06	405.21	407.56	410.52	407.33	410.51
	Line 13		405.33	404.89	404.52	404.13	403.17	403.32	405.69	408.61	404.85	408.61
	Line 14		403.44	402.99	402.63	402.25	401.28	401.43	403.81	406.71	402.37	406.70
	Line 15		401.54	401.10	400.74	400.37	399.38	399.53	401.93	404.80	399.89	404.80
	Line 16		399.65	399.20	398.85	398.48	397.49	397.64	400.05	402.89	397.41	402.89
	Line 17		397.75	397.31	396.96	396.59	395.59	395.74	398.17	400.98	394.93	400.98
	Line 18		395.85	395.41	395.06	394.70	393.69	393.84	396.28	399.07	392.44	399.07
	Line 19		393.95	393.51	393.17	392.81	391.79	391.94	394.40	397.16	389.96	397.16
	Line 20		392.05	391.60	391.27	390.91	389.89	390.04	392.51	395.25	387.47	395.25
	Line 21		390.14	389.70	389.37	389.02	387.99	388.13	390.62	393.34	384.98	393.34
	Line 22		388.24	387.80	387.47	387.12	386.09	386.23	388.73	391.42	382.49	391.42
	Line 23		386.33	385.89	385.57	385.22	384.18	384.32	386.83	389.51	380.00	389.51
	Line 24		386.33	385.89	385.57	385.22	384.18	384.32	386.83	389.51	380.00	389.51
	Line 25		386.33	385.89	385.57	385.22	384.18	384.32	386.83	389.51	380.00	389.51
	Line 26		379.82	379.82	379.43	379.29	378.98	378.85	380.02	384.75	380.00	384.75
	Line 27		373.31	373.75	373.30	373.35	373.77	373.38	373.20	380.00	380.00	380.00
	Line 28		355.70	361.07	356.29	357.26	362.61	358.34	355.00	380.00	380.00	380.00
	Line 29											
	Line 30											
	Line 31											

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

Attachment 5

CASE 4: Settlement Analysis for Top of Final Cover 30 Years after Closure (i.e., End of Year 35) (Points 1001 to 1010)

Written by: **Yiwen Cao** Date: **12/17/2009** Reviewed by: **R. Kulasingam/Jay Beech** Date: **12/17/2009**

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

Settlement Prediction Model													
Programmer: Yiwen Cao, GeoSyntec Consultants													
Version Control V 1.002 11.14.2007													
Project: Onondaga Lake SCA Final													
Notes:													
Unit: ft / psf													
Average Compaction Effort = 1440.00 kPa or psf													
Consider Compaction Effort = N yes or no													
Point #				1001	1002	1003	1004	1005	1006	1007	1008	1009	1010
Distance (meter or ft)				0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
ELEVATION (M / FT)	Line	1	Top of Final Cover	455.76	454.88	455.64	455.51	454.68	455.50	456.35	457.00	457.01	457.01
	Line	2	Top of Year 4 Dredge	450.92	450.62	450.30	450.00	450.11	449.93	450.30	453.82	454.05	453.80
	Line	3		450.92	450.62	450.30	450.00	450.11	449.93	450.30	453.82	454.05	453.80
	Line	4		450.92	450.62	450.30	450.00	450.11	449.93	450.30	453.82	454.05	453.80
	Line	5		450.92	450.62	450.30	450.00	450.11	449.93	450.30	453.82	454.05	453.80
	Line	6		450.92	450.62	450.30	450.00	450.11	449.93	450.30	453.82	454.05	453.80
	Line	7		450.92	450.62	450.30	450.00	450.11	449.93	450.30	453.82	454.05	453.80
	Line	8	Top of Year 3 Dredge	450.92	450.62	450.30	450.00	450.11	449.93	450.30	453.82	454.05	453.80
	Line	9		449.21	448.91	448.59	448.29	448.40	448.22	448.59	452.11	452.34	452.09
	Line	10		447.49	447.19	446.87	446.57	446.68	446.50	446.87	450.39	450.62	450.37
	Line	11		445.78	445.48	445.16	444.86	444.97	444.79	445.16	448.68	448.91	448.66
	Line	12		444.07	443.76	443.45	443.15	443.26	443.08	443.45	446.96	447.19	446.95
	Line	13		442.36	442.05	441.74	441.44	441.55	441.37	441.74	445.25	445.48	445.24
	Line	14		440.64	440.33	440.02	439.72	439.83	439.65	440.02	443.53	443.76	443.52
	Line	15	Top of Year 2 Dredge	438.93	438.62	438.31	438.01	438.12	437.94	438.31	441.82	442.05	441.81
	Line	16		438.93	438.62	438.31	438.01	438.12	437.94	436.95	439.61	439.84	439.60
	Line	17		438.93	438.62	438.31	438.01	438.12	437.94	435.58	437.40	437.63	437.39
	Line	18		438.93	438.62	438.31	438.01	438.12	437.94	434.22	435.19	435.42	435.18
	Line	19		438.93	438.62	438.31	438.01	438.12	437.94	432.85	432.98	433.21	432.97
	Line	20		438.93	438.62	438.31	438.01	438.12	437.94	431.49	430.77	431.00	430.76
	Line	21		438.93	438.62	438.31	438.01	438.12	437.94	430.12	428.56	428.79	428.55
	Line	22	Top of Year 1 Dredge	438.93	438.62	438.31	438.01	438.12	437.94	428.76	426.35	426.58	426.34
	Line	23		436.35	436.04	435.73	435.43	435.54	435.36	428.02	426.35	426.58	426.34
	Line	24		433.77	433.46	433.15	432.85	432.96	432.78	427.28	426.35	426.58	426.34
	Line	25		431.19	430.89	430.57	430.27	430.38	430.20	426.34	426.35	426.58	426.34
	Line	26		428.61	428.31	427.99	427.69	427.80	427.62	425.80	426.35	426.58	426.34
	Line	27		426.03	425.73	425.41	425.11	425.22	425.04	425.06	426.35	426.58	426.34
	Line	28	Top of Gravel/Top of Incompressible	423.45	423.15	422.83	422.53	422.64	422.46	424.32	426.35	426.58	426.34
	Line	29	GND for sigma p	430.02	429.02	429.25	428.78	427.10	427.77	430.81	431.00	431.04	431.00
	Line	30	GW	375.00	375.00	375.00	375.00	375.00	375.00	375.00	375.00	375.00	375.00
	Line	31	ROCK	355.70	361.07	356.29	357.26	362.61	358.34	355.00	380.00	380.00	380.00
LAYER THICKNESS (M / FT)	Layer No.	From	To	Material									
	1	1	2	Cover	4.84	4.26	5.34	5.51	4.57	5.57	6.05	3.18	2.96
	2	2	3	YR4-1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3	3	4	YR4-2	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4	4	5	YR4-3	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5	5	6	YR4-4	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6	6	7	YR4-5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	7	7	8	YR4-6	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	8	8	9	YR3-1	1.71	1.71	1.71	1.71	1.71	1.71	1.71	1.71	1.71
	9	9	10	YR3-2	1.71	1.71	1.71	1.71	1.71	1.71	1.71	1.71	1.71
	10	10	11	YR3-3	1.71	1.71	1.71	1.71	1.71	1.71	1.71	1.71	1.71
	11	11	12	YR3-4	1.71	1.71	1.71	1.71	1.71	1.71	1.71	1.71	1.71
	12	12	13	YR3-5	1.71	1.71	1.71	1.71	1.71	1.71	1.71	1.71	1.71
	13	13	14	YR3-6	1.71	1.71	1.71	1.71	1.71	1.71	1.71	1.71	1.71
	14	14	15	YR3-7	1.71	1.71	1.71	1.71	1.71	1.71	1.71	1.71	1.71
	15	15	16	YR2-1	0.00	0.00	0.00	0.00	0.00	0.00	1.36	2.21	2.21
	16	16	17	YR2-2	0.00	0.00	0.00	0.00	0.00	0.00	1.36	2.21	2.21
	17	17	18	YR2-3	0.00	0.00	0.00	0.00	0.00	0.00	1.36	2.21	2.21
	18	18	19	YR2-4	0.00	0.00	0.00	0.00	0.00	0.00	1.36	2.21	2.21
	19	19	20	YR2-5	0.00	0.00	0.00	0.00	0.00	0.00	1.36	2.21	2.21
	20	20	21	YR2-6	0.00	0.00	0.00	0.00	0.00	0.00	1.36	2.21	2.21
	21	21	22	YR2-7	0.00	0.00	0.00	0.00	0.00	0.00	1.36	2.21	2.21
	22	22	23	YR1-1	2.58	2.58	2.58	2.58	2.58	2.58	0.74	0.00	0.00
	23	23	24	YR1-2	2.58	2.58	2.58	2.58	2.58	2.58	0.74	0.00	0.00
	24	24	25	YR1-3	2.58	2.58	2.58	2.58	2.58	2.58	0.74	0.00	0.00
	25	25	26	YR1-4	2.58	2.58	2.58	2.58	2.58	2.58	0.74	0.00	0.00
	26	26	27	YR1-5	2.58	2.58	2.58	2.58	2.58	2.58	0.74	0.00	0.00
	27	27	28	YR1-6	2.58	2.58	2.58	2.58	2.58	2.58	0.74	0.00	0.00
	28												
	29												
	30												
Thickness Check													
	From Line	To Line	SUM	32.31	31.73	32.81	32.98	32.04	33.04	32.03	30.65	30.43	30.67
	1	28	Thickness =	32.31	31.73	32.81	32.98	32.04	33.04	32.03	30.65	30.43	30.67
			Thickness Check	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: Honeywell Project: Onondaga Lake SCA Final Design Project/ Proposal No.: GJ4299 Task No.: 04

UNIT WEIGHT	Layer No.	Material										
	1	Cover	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0
	2	YR4-1	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	3	YR4-2	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	4	YR4-3	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	5	YR4-4	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	6	YR4-5	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	7	YR4-6	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	8	YR3-1	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	9	YR3-2	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	10	YR3-3	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	11	YR3-4	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	12	YR3-5	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	13	YR3-6	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	14	YR3-7	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	15	YR2-1	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	16	YR2-2	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	17	YR2-3	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	18	YR2-4	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	19	YR2-5	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	20	YR2-6	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	21	YR2-7	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	22	YR1-1	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	23	YR1-2	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	24	YR1-3	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	25	YR1-4	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	26	YR1-5	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	27	YR1-6	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	28											
	29		82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	30	Soil below GW	19.6	19.6	19.6	19.6	19.6	19.6	19.6	19.6	19.6	19.6
	Layer No.	1 Cover										
		Initial Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1
		Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1
		Midpoint Elevation, (m / ft)	453.34	452.75	452.97	452.76	452.40	452.72	453.33	455.41	455.53	455.40
		Initial Effective Stress, σ'_i (kPa / psf)	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight
Elastic Method												
Modulus, E (kPa/psf)=			Strain									
			Settlement (m / ft)									
1-D Consolidation Theory (Plastic Method)												
Consolidation Properties												
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)												
OCR Manual Input Value												
OCR Computation Input												
Preconsolidation pressure, σ'_p (kPa / psf)												
Modified Primary Compression Index, C_{ce}												
Modified Recompression Index, C_{re}												
Modified Secondary Compression Index, C_{α}												
ratio of t_2 / t_1												
Settlements												
Primary Settlement, (m / ft)												
Secondary Settlement (m / ft)												
Total Settlement (m / ft)												
Elastic or Plastic (E/P)												
Settlement of Layer 1 (m / ft)												

Written by: **Yiwen Cao** Date: **12/17/2009** Reviewed by: **R. Kulasingam/Jay Beech** Date: **12/17/2009**

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

Layer No. 2	YR4-1									
Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2	2
Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1
Midpoint Elevation, (m / ft)	450.92	450.62	450.30	450.00	450.11	449.93	450.30	453.82	454.05	453.80
Initial Effective Stress, σ'_i (kPa /psf)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Final Effective Stress, σ'_f (kPa/psf)	581.16	510.95	641.24	661.33	548.72	668.65	726.31	381.94	355.20	384.83
Elastic Method										
Modulus, E (kPa/psf)=										
Strain										
Settlement (m / ft)										
1-D Consolidation Theory (Plastic Method)										
Consolidation Properties										
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)	MW	MW	MW	MW	MW	MW	MW	MW	MW	MW
OCR Manual Input Value	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input										
Preconsolidation pressure, σ'_p (kPa / psf)	0	0	0	0	0	0	0	0	0	0
Modified Primary Compression Index, C_{cc}	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291
Modified Recompression Index, C_{re}	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005
Modified Secondary Compression Index, $C_{\alpha\alpha}$	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%
ratio of t2 / t1	32.00	32.00	32.00	32.00	32.00	32.00	32.00	32.00	32.00	32.00
Settlements										
Primary Settlement, (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Secondary Settlement (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Total Settlement (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Elastic or Plastic (E/P)										
1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D
Settlement of Layer 2 (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Layer No. 3	YR4-2									
Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2	2
Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1
Midpoint Elevation, (m / ft)	450.92	450.62	450.30	450.00	450.11	449.93	450.30	453.82	454.05	453.80
Initial Effective Stress, σ'_i (kPa /psf)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Final Effective Stress, σ'_f (kPa/psf)	581.16	510.95	641.24	661.33	548.72	668.65	726.31	381.94	355.20	384.83
Elastic Method										
Modulus, E (kPa/psf)=										
Strain										
Settlement (m / ft)										
1-D Consolidation Theory (Plastic Method)										
Consolidation Properties										
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)	MW	MW	MW	MW	MW	MW	MW	MW	MW	MW
OCR Manual Input Value	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input										
Preconsolidation pressure, σ'_p (kPa / psf)	0	0	0	0	0	0	0	0	0	0
Modified Primary Compression Index, C_{cc}	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291
Modified Recompression Index, C_{re}	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005
Modified Secondary Compression Index, $C_{\alpha\alpha}$	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%
ratio of t2 / t1	32.00	32.00	32.00	32.00	32.00	32.00	32.00	32.00	32.00	32.00
Settlements										
Primary Settlement, (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Secondary Settlement (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Total Settlement (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Elastic or Plastic (E/P)										
1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D
Settlement of Layer 3 (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Layer No. 4	YR4-3									
Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2	2
Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1
Midpoint Elevation, (m / ft)	450.92	450.62	450.30	450.00	450.11	449.93	450.30	453.82	454.05	453.80
Initial Effective Stress, σ'_i (kPa /psf)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Final Effective Stress, σ'_f (kPa/psf)	581.16	510.95	641.24	661.33	548.72	668.65	726.31	381.94	355.20	384.83
Elastic Method										
Modulus, E (kPa/psf)=										
Strain										
Settlement (m / ft)										
1-D Consolidation Theory (Plastic Method)										
Consolidation Properties										
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)	MW	MW	MW	MW	MW	MW	MW	MW	MW	MW
OCR Manual Input Value	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input										
Preconsolidation pressure, σ'_p (kPa / psf)	0	0	0	0	0	0	0	0	0	0
Modified Primary Compression Index, C_{cc}	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291
Modified Recompression Index, C_{re}	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005
Modified Secondary Compression Index, $C_{\alpha\alpha}$	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%
ratio of t2 / t1	32.00	32.00	32.00	32.00	32.00	32.00	32.00	32.00	32.00	32.00
Settlements										
Primary Settlement, (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Secondary Settlement (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Total Settlement (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Elastic or Plastic (E/P)										
1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D
Settlement of Layer 4 (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: Honeywell Project: Onondaga Lake SCA Final Design Project/ Proposal No.: GJ4299 Task No.: 04

	Layer No. 5	YR4-4									
	Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2	
	Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	
	Midpoint Elevation, (m / ft)	450.92	450.62	450.30	450.00	450.11	449.93	450.30	453.82	454.05	453.80
	Initial Effective Stress, σ'_i (kPa /psf)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Final Effective Stress, σ'_f (kPa/psf)	581.16	510.95	641.24	661.33	548.72	668.65	726.31	381.94	355.20	384.83
Elastic Method											
Modulus, E (kPa/psf)=		Strain									
		Settlement (m / ft)									
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)		MW	MW	MW	MW	MW	MW	MW	MW	MW	MW
OCR Manual Input Value		1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)		0	0	0	0	0	0	0	0	0	0
Modified Primary Compression Index, C_{cc}		0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291
Modified Recompression Index, C_{re}		0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005
Modified Secondary Compression Index, $C_{\alpha\alpha}$		0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%
ratio of t2 / t1		32.00	32.00	32.00	32.00	32.00	32.00	32.00	32.00	32.00	32.00
Settlements											
Primary Settlement, (m / ft)		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Secondary Settlement (m / ft)		0.00000	0.00000	0.00000	0.00000	0.00000	0.00000	0.00000	0.00000	0.00000	0.00000
Total Settlement (m / ft)		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Elastic or Plastic (E/P)		P	P	P	P	P	P	P	P	P	P
Settlement of Layer 5 (m / ft)		1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D
		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	Layer No. 6	YR4-5									
	Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2	2
	Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1
	Midpoint Elevation, (m / ft)	450.92	450.62	450.30	450.00	450.11	449.93	450.30	453.82	454.05	453.80
	Initial Effective Stress, σ'_i (kPa /psf)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Final Effective Stress, σ'_f (kPa/psf)	581.16	510.95	641.24	661.33	548.72	668.65	726.31	381.94	355.20	384.83
Elastic Method											
Modulus, E (kPa/psf)=		Strain									
		Settlement (m / ft)									
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)		MW	MW	MW	MW	MW	MW	MW	MW	MW	MW
OCR Manual Input Value		1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)		0	0	0	0	0	0	0	0	0	0
Modified Primary Compression Index, C_{cc}		0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291
Modified Recompression Index, C_{re}		0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005
Modified Secondary Compression Index, $C_{\alpha\alpha}$		0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%
ratio of t2 / t1		32.00	32.00	32.00	32.00	32.00	32.00	32.00	32.00	32.00	32.00
Settlements											
Primary Settlement, (m / ft)		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Secondary Settlement (m / ft)		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Total Settlement (m / ft)		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Elastic or Plastic (E/P)		P	P	P	P	P	P	P	P	P	P
Settlement of Layer 6 (m / ft)		1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D
		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	Layer No. 7	YR4-6									
	Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2	2
	Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1
	Midpoint Elevation, (m / ft)	450.92	450.62	450.30	450.00	450.11	449.93	450.30	453.82	454.05	453.80
	Initial Effective Stress, σ'_i (kPa /psf)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Final Effective Stress, σ'_f (kPa/psf)	581.16	510.95	641.24	661.33	548.72	668.65	726.31	381.94	355.20	384.83
Elastic Method											
Modulus, E (kPa/psf)=		Strain									
		Settlement (m / ft)									
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)		MW	MW	MW	MW	MW	MW	MW	MW	MW	MW
OCR Manual Input Value		1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)		0	0	0	0	0	0	0	0	0	0
Modified Primary Compression Index, C_{cc}		0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291
Modified Recompression Index, C_{re}		0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005
Modified Secondary Compression Index, $C_{\alpha\alpha}$		0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%
ratio of t2 / t1		32.00	32.00	32.00	32.00	32.00	32.00	32.00	32.00	32.00	32.00
Settlements											
Primary Settlement, (m / ft)		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Secondary Settlement (m / ft)		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Total Settlement (m / ft)		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Elastic or Plastic (E/P)		P	P	P	P	P	P	P	P	P	P
Settlement of Layer 7 (m / ft)		1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D
		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000

Written by: **Yiwen Cao** Date: **12/17/2009** Reviewed by: **R. Kulasingam/Jay Beech** Date: **12/17/2009**

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

Layer No.	8 YR3-1									
Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2	2
Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1
Midpoint Elevation, (m / ft)	450.06	449.76	449.44	449.14	449.25	449.07	449.44	452.96	453.19	452.94
Initial Effective Stress, σ'_i (kPa / psf)	73.65	73.71	73.65	73.65	73.65	73.65	73.65	73.71	73.71	73.65
Final Effective Stress, σ'_f (kPa/psf)	654.81	584.66	714.90	734.98	622.38	742.30	799.96	455.65	428.91	458.48
Elastic Method										
Modulus, E (kPa/psf)=										
Strain										
Settlement (m / ft)										
1-D Consolidation Theory (Plastic Method)										
Consolidation Properties										
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)	MW	MW	MW	MW	MW	MW	MW	MW	MW	MW
OCR Manual Input Value	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input										
Preconsolidation pressure, σ'_p (kPa / psf)	74	74	74	74	74	74	74	74	74	74
Modified Primary Compression Index, C_{cc}	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291
Modified Recompression Index, C_{re}	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005
Modified Secondary Compression Index, $C_{\alpha\alpha}$	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%
ratio of t_2 / t_1	16.50	16.50	16.50	16.50	16.50	16.50	16.50	16.50	16.50	16.50
Settlements										
Primary Settlement, (m / ft)	0.474	0.449	0.493	0.499	0.463	0.501	0.517	0.395	0.382	0.396
Secondary Settlement (m / ft)	0.013	0.013	0.013	0.013	0.013	0.013	0.013	0.013	0.013	0.013
Total Settlement (m / ft)	0.486	0.462	0.505	0.511	0.475	0.513	0.529	0.408	0.395	0.409
Elastic or Plastic (E/P)										
	P	P	P	P	P	P	P	P	P	P
	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D
Settlement of Layer 8 (m / ft)	0.486	0.462	0.505	0.511	0.475	0.513	0.529	0.408	0.395	0.409
Layer No.	9 YR3-2									
Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2	2
Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1
Midpoint Elevation, (m / ft)	448.35	448.05	447.73	447.43	447.54	447.36	447.73	451.25	451.48	451.23
Initial Effective Stress, σ'_i (kPa /psf)	220.96	221.14	220.96	220.96	220.96	220.96	220.96	221.14	221.14	220.96
Final Effective Stress, σ'_f (kPa/psf)	802.12	732.09	862.20	882.29	769.68	889.61	947.27	603.08	576.34	605.79
Elastic Method										
Modulus, E (kPa/psf)=										
Strain										
Settlement (m / ft)										
1-D Consolidation Theory (Plastic Method)										
Consolidation Properties										
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)	MW	MW	MW	MW	MW	MW	MW	MW	MW	MW
OCR Manual Input Value	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input										
Preconsolidation pressure, σ'_p (kPa / psf)	221	221	221	221	221	221	221	221	221	221
Modified Primary Compression Index, C_{cc}	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291
Modified Recompression Index, C_{re}	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005
Modified Secondary Compression Index, $C_{\alpha\alpha}$	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%
ratio of t_2 / t_1	16.50	16.50	16.50	16.50	16.50	16.50	16.50	16.50	16.50	16.50
Settlements										
Primary Settlement, (m / ft)	0.279	0.260	0.295	0.300	0.270	0.302	0.315	0.218	0.208	0.219
Secondary Settlement (m / ft)	0.013	0.013	0.013	0.013	0.013	0.013	0.013	0.013	0.013	0.013
Total Settlement (m / ft)	0.292	0.272	0.308	0.313	0.283	0.314	0.328	0.230	0.220	0.231
Elastic or Plastic (E/P)										
	P	P	P	P	P	P	P	P	P	P
	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D
Settlement of Layer 9 (m / ft)	0.292	0.272	0.308	0.313	0.283	0.314	0.328	0.230	0.220	0.231
Layer No.	10 YR3-3									
Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2	2
Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1
Midpoint Elevation, (m / ft)	446.64	446.33	446.02	445.72	445.83	445.65	446.02	449.53	449.76	449.52
Initial Effective Stress, σ'_i (kPa /psf)	368.26	368.57	368.26	368.26	368.26	368.26	368.26	368.57	368.57	368.26
Final Effective Stress, σ'_f (kPa/psf)	949.42	879.52	1,009.51	1,029.60	916.99	1,036.92	1,094.58	750.51	723.77	753.09
Elastic Method										
Modulus, E (kPa/psf)=										
Strain										
Settlement (m / ft)										
1-D Consolidation Theory (Plastic Method)										
Consolidation Properties										
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)	MW	MW	MW	MW	MW	MW	MW	MW	MW	MW
OCR Manual Input Value	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input										
Preconsolidation pressure, σ'_p (kPa / psf)	368	369	368	368	368	368	368	369	369	368
Modified Primary Compression Index, C_{cc}	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291
Modified Recompression Index, C_{re}	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005
Modified Secondary Compression Index, $C_{\alpha\alpha}$	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%
ratio of t_2 / t_1	16.50	16.50	16.50	16.50	16.50	16.50	16.50	16.50	16.50	16.50
Settlements										
Primary Settlement, (m / ft)	0.205	0.189	0.219	0.223	0.198	0.224	0.236	0.154	0.146	0.155
Secondary Settlement (m / ft)	0.013	0.013	0.013	0.013	0.013	0.013	0.013	0.013	0.013	0.013
Total Settlement (m / ft)	0.218	0.201	0.231	0.235	0.210	0.237	0.249	0.167	0.159	0.168
Elastic or Plastic (E/P)										
	P	P	P	P	P	P	P	P	P	P
	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D
Settlement of Layer 10 (m / ft)	0.218	0.201	0.231	0.235	0.210	0.237	0.249	0.167	0.159	0.168

Written by: **Yiwen Cao** Date: **12/17/2009** Reviewed by: **R. Kulasingam/Jay Beech** Date: **12/17/2009**

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

	Layer No.	11YR3-4									
	Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2	
	Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	
	Midpoint Elevation, (m / ft)	444.93	444.62	444.31	444.01	444.12	443.94	444.31	447.82	448.05	447.81
	Initial Effective Stress, σ'_i (kPa /psf)	515.57	516.00	515.57	515.57	515.57	515.57	516.00	516.00	515.57	
	Final Effective Stress, σ'_f (kPa/psf)	1,096.73	1,026.95	1,156.81	1,176.90	1,064.29	1,184.22	1,241.88	897.94	871.20	900.40
Elastic Method											
Modulus, E (kPa/psf)=											
Strain											
Settlement (m / ft)											
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)		MW	MW	MW	MW	MW	MW	MW	MW	MW	MW
OCR Manual Input Value		1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)		516	516	516	516	516	516	516	516	516	516
Modified Primary Compression Index, C_{cc}		0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291
Modified Recompression Index, C_{re}		0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005
Modified Secondary Compression Index, $C_{\alpha\alpha}$		0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%
ratio of t2 / t1		16.50	16.50	16.50	16.50	16.50	16.50	16.50	16.50	16.50	16.50
Settlements											
Primary Settlement, (m / ft)		0.164	0.149	0.175	0.179	0.157	0.180	0.191	0.120	0.114	0.121
Secondary Settlement (m / ft)		0.013	0.013	0.013	0.013	0.013	0.013	0.013	0.013	0.013	0.013
Total Settlement (m / ft)		0.176	0.162	0.188	0.191	0.170	0.193	0.203	0.133	0.126	0.133
Elastic or Plastic (E/P)		P	P	P	P	P	P	P	P	P	P
1-D		1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D
Settlement of Layer 11 (m / ft)		0.176	0.162	0.188	0.191	0.170	0.193	0.203	0.133	0.126	0.133
	Layer No.	12YR3-5									
	Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2	2
	Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1
	Midpoint Elevation, (m / ft)	443.21	442.91	442.59	442.29	442.40	442.22	442.59	446.11	446.34	446.09
	Initial Effective Stress, σ'_i (kPa /psf)	662.88	663.43	662.88	662.88	662.88	662.88	662.88	663.43	663.43	662.88
	Final Effective Stress, σ'_f (kPa/psf)	1,244.04	1,174.38	1,304.12	1,324.21	1,211.60	1,331.53	1,389.19	1,045.36	1,018.63	1,047.70
Elastic Method											
Modulus, E (kPa/psf)=											
Strain											
Settlement (m / ft)											
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)		MW	MW	MW	MW	MW	MW	MW	MW	MW	MW
OCR Manual Input Value		1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)		663	663	663	663	663	663	663	663	663	663
Modified Primary Compression Index, C_{cc}		0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291
Modified Recompression Index, C_{re}		0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005
Modified Secondary Compression Index, $C_{\alpha\alpha}$		0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%
ratio of t2 / t1		16.50	16.50	16.50	16.50	16.50	16.50	16.50	16.50	16.50	16.50
Settlements											
Primary Settlement, (m / ft)		0.136	0.124	0.147	0.150	0.131	0.151	0.160	0.099	0.093	0.099
Secondary Settlement (m / ft)		0.013	0.013	0.013	0.013	0.013	0.013	0.013	0.013	0.013	0.013
Total Settlement (m / ft)		0.149	0.136	0.159	0.162	0.143	0.164	0.173	0.111	0.106	0.112
Elastic or Plastic (E/P)		P	P	P	P	P	P	P	P	P	P
1-D		1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D
Settlement of Layer 12 (m / ft)		0.149	0.136	0.159	0.162	0.143	0.164	0.173	0.111	0.106	0.112
	Layer No.	13YR3-6									
	Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2	2
	Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1
	Midpoint Elevation, (m / ft)	441.50	441.19	440.88	440.58	440.69	440.51	440.88	444.39	444.62	444.38
	Initial Effective Stress, σ'_i (kPa /psf)	810	811	810	810	810	810	810	811	811	810
	Final Effective Stress, σ'_f (kPa/psf)	1,391	1,322	1,451	1,472	1,359	1,479	1,536	1,193	1,166	1,195
Elastic Method											
Modulus, E (kPa/psf)=											
Strain											
Settlement (m / ft)											
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)		MW	MW	MW	MW	MW	MW	MW	MW	MW	MW
OCR Manual Input Value		1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)		810	811	810	810	810	810	810	811	811	810
Modified Primary Compression Index, C_{cc}		0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291
Modified Recompression Index, C_{re}		0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005
Modified Secondary Compression Index, $C_{\alpha\alpha}$		0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%
ratio of t2 / t1		16.50	16.50	16.50	16.50	16.50	16.50	16.50	16.50	16.50	16.50
Settlements											
Primary Settlement, (m / ft)		0.117	0.106	0.126	0.129	0.112	0.130	0.139	0.084	0.079	0.084
Secondary Settlement (m / ft)		0.013	0.013	0.013	0.013	0.013	0.013	0.013	0.013	0.013	0.013
Total Settlement (m / ft)		0.130	0.119	0.139	0.142	0.125	0.143	0.151	0.096	0.091	0.097
Elastic or Plastic (E/P)		P	P	P	P	P	P	P	P	P	P
1-D		1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D
Settlement of Layer 13 (m / ft)		0.130	0.119	0.139	0.142	0.125	0.143	0.151	0.096	0.091	0.097

Written by: **Yiwen Cao** Date: **12/17/2009** Reviewed by: **R. Kulasingam/Jay Beech** Date: **12/17/2009**

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

	Layer No.	14 YR3-7									
	Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2	
	Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	
	Midpoint Elevation, (m / ft)	439.79	439.48	439.17	438.87	438.98	438.80	439.17	442.68	442.91	442.67
	Initial Effective Stress, σ'_i (kPa /psf)	957	958	957	957	957	957	957	958	958	957
	Final Effective Stress, σ'_f (kPa/psf)	1,539	1,469	1,599	1,619	1,506	1,626	1,684	1,340	1,313	1,342
Elastic Method											
Modulus, E (kPa/psf)=											
Strain											
Settlement (m / ft)											
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)		MW	MW	MW	MW	MW	MW	MW	MW	MW	MW
OCR Manual Input Value		1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)		957	958	957	957	957	957	957	958	958	957
Modified Primary Compression Index, C_{cc}		0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291
Modified Recompression Index, C_{re}		0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005
Modified Secondary Compression Index, $C_{\alpha\alpha}$		0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%
ratio of t2 / t1		16.50	16.50	16.50	16.50	16.50	16.50	16.50	16.50	16.50	16.50
Settlements											
Primary Settlement, (m / ft)		0.103	0.093	0.111	0.114	0.098	0.115	0.122	0.073	0.068	0.073
Secondary Settlement (m / ft)		0.013	0.013	0.013	0.013	0.013	0.013	0.013	0.013	0.013	0.013
Total Settlement (m / ft)		0.115	0.105	0.124	0.126	0.111	0.127	0.135	0.085	0.081	0.086
Elastic or Plastic (E/P)		P	P	P	P	P	P	P	P	P	P
1-D		1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D
Settlement of Layer 14 (m / ft)		0.115	0.105	0.124	0.126	0.111	0.127	0.135	0.085	0.081	0.086
	Layer No.	15 YR2-1									
	Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2	2
	Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1
	Midpoint Elevation, (m / ft)	438.93	438.62	438.31	438.01	438.12	437.94	437.63	440.72	440.95	440.71
	Initial Effective Stress, σ'_i (kPa /psf)	1,031	1,032	1,031	1,031	1,031	1,031	1,090	1,127	1,127	1,126
	Final Effective Stress, σ'_f (kPa/psf)	1,612	1,543	1,672	1,692	1,580	1,700	1,816	1,509	1,482	1,511
Elastic Method											
Modulus, E (kPa/psf)=											
Strain											
Settlement (m / ft)											
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)		MW	MW	MW	MW	MW	MW	MW	MW	MW	MW
OCR Manual Input Value		1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)		1,031	1,032	1,031	1,031	1,031	1,031	1,090	1,127	1,127	1,126
Modified Primary Compression Index, C_{cc}		0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291
Modified Recompression Index, C_{re}		0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005
Modified Secondary Compression Index, $C_{\alpha\alpha}$		0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%
ratio of t2 / t1		11.33	11.33	11.33	11.33	11.33	11.33	11.33	11.33	11.33	11.33
Settlements											
Primary Settlement, (m / ft)		0.000	0.000	0.000	0.000	0.000	0.000	0.088	0.082	0.077	0.082
Secondary Settlement (m / ft)		0.000	0.000	0.000	0.000	0.000	0.000	0.009	0.014	0.014	0.014
Total Settlement (m / ft)		0.000	0.000	0.000	0.000	0.000	0.000	0.097	0.096	0.091	0.096
Elastic or Plastic (E/P)		P	P	P	P	P	P	P	P	P	P
1-D		1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D
Settlement of Layer 15 (m / ft)		0.000	0.000	0.000	0.000	0.000	0.000	0.097	0.096	0.091	0.096
	Layer No.	16 YR2-2									
	Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2	2
	Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1
	Midpoint Elevation, (m / ft)	438.93	438.62	438.31	438.01	438.12	437.94	436.26	438.51	438.74	438.50
	Initial Effective Stress, σ'_i (kPa /psf)	1,031	1,032	1,031	1,031	1,031	1,031	1,207	1,317	1,317	1,316
	Final Effective Stress, σ'_f (kPa/psf)	1,612	1,543	1,672	1,692	1,580	1,700	1,933	1,699	1,672	1,701
Elastic Method											
Modulus, E (kPa/psf)=											
Strain											
Settlement (m / ft)											
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)		MW	MW	MW	MW	MW	MW	MW	MW	MW	MW
OCR Manual Input Value		1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)		1,031	1,032	1,031	1,031	1,031	1,031	1,207	1,317	1,317	1,316
Modified Primary Compression Index, C_{cc}		0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291
Modified Recompression Index, C_{re}		0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005
Modified Secondary Compression Index, $C_{\alpha\alpha}$		0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%
ratio of t2 / t1		11.33	11.33	11.33	11.33	11.33	11.33	11.33	11.33	11.33	11.33
Settlements											
Primary Settlement, (m / ft)		0.000	0.000	0.000	0.000	0.000	0.000	0.081	0.071	0.067	0.072
Secondary Settlement (m / ft)		0.000	0.000	0.000	0.000	0.000	0.000	0.009	0.014	0.014	0.014
Total Settlement (m / ft)		0.000	0.000	0.000	0.000	0.000	0.000	0.090	0.085	0.081	0.086
Elastic or Plastic (E/P)		P	P	P	P	P	P	P	P	P	P
1-D		1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D
Settlement of Layer 16 (m / ft)		0.000	0.000	0.000	0.000	0.000	0.000	0.090	0.085	0.081	0.086

Written by: **Yiwen Cao** Date: **12/17/2009** Reviewed by: **R. Kulasingam/Jay Beech** Date: **12/17/2009**

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

Layer No.	17 YR2-3									
Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2	2
Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1
Midpoint Elevation, (m / ft)	438.93	438.62	438.31	438.01	438.12	437.94	434.90	436.30	436.53	436.29
Initial Effective Stress, σ'_i (kPa / psf)	1,031	1,032	1,031	1,031	1,031	1,031	1,324	1,507	1,507	1,506
Final Effective Stress, σ'_f (kPa/psf)	1,612	1,543	1,672	1,692	1,580	1,700	2,051	1,889	1,862	1,891
Elastic Method										
Modulus, E (kPa/psf)=										
Strain										
Settlement (m / ft)										
1-D Consolidation Theory (Plastic Method)										
Consolidation Properties										
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)	MW	MW	MW	MW	MW	MW	MW	MW	MW	MW
OCR Manual Input Value	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input										
Preconsolidation pressure, σ'_p (kPa / psf)	1,031	1,032	1,031	1,031	1,031	1,031	1,324	1,507	1,507	1,506
Modified Primary Compression Index, C_{cc}	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291
Modified Recompression Index, C_{re}	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005
Modified Secondary Compression Index, $C_{\alpha\alpha}$	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%
ratio of t_2 / t_1	11.33	11.33	11.33	11.33	11.33	11.33	11.33	11.33	11.33	11.33
Settlements										
Primary Settlement, (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.075	0.063	0.059	0.064
Secondary Settlement (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.009	0.014	0.014	0.014
Total Settlement (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.084	0.077	0.073	0.078
Elastic or Plastic (E/P)										
	P	P	P	P	P	P	P	P	P	P
	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D
Settlement of Layer 17 (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.084	0.077	0.073	0.078
Layer No.	18 YR2-4									
Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2	2
Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1
Midpoint Elevation, (m / ft)	438.93	438.62	438.31	438.01	438.12	437.94	433.54	434.09	434.32	434.08
Initial Effective Stress, σ'_i (kPa / psf)	1,031	1,032	1,031	1,031	1,031	1,031	1,442	1,697	1,697	1,696
Final Effective Stress, σ'_f (kPa/psf)	1,612	1,543	1,672	1,692	1,580	1,700	2,168	2,079	2,052	2,081
Elastic Method										
Modulus, E (kPa/psf)=										
Strain										
Settlement (m / ft)										
1-D Consolidation Theory (Plastic Method)										
Consolidation Properties										
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)	MW	MW	MW	MW	MW	MW	MW	MW	MW	MW
OCR Manual Input Value	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input										
Preconsolidation pressure, σ'_p (kPa / psf)	1,031	1,032	1,031	1,031	1,031	1,031	1,442	1,697	1,697	1,696
Modified Primary Compression Index, C_{cc}	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291
Modified Recompression Index, C_{re}	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005
Modified Secondary Compression Index, $C_{\alpha\alpha}$	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%
ratio of t_2 / t_1	11.33	11.33	11.33	11.33	11.33	11.33	11.33	11.33	11.33	11.33
Settlements										
Primary Settlement, (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.070	0.057	0.053	0.057
Secondary Settlement (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.009	0.014	0.014	0.014
Total Settlement (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.079	0.071	0.067	0.071
Elastic or Plastic (E/P)										
	P	P	P	P	P	P	P	P	P	P
	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D
Settlement of Layer 18 (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.079	0.071	0.067	0.071
Layer No.	19 YR2-5									
Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2	2
Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1
Midpoint Elevation, (m / ft)	438.93	438.62	438.31	438.01	438.12	437.94	432.17	431.88	432.11	431.87
Initial Effective Stress, σ'_i (kPa / psf)	1,031	1,032	1,031	1,031	1,031	1,031	1,559	1,887	1,887	1,886
Final Effective Stress, σ'_f (kPa/psf)	1,612	1,543	1,672	1,692	1,580	1,700	2,285	2,269	2,242	2,271
Elastic Method										
Modulus, E (kPa/psf)=										
Strain										
Settlement (m / ft)										
1-D Consolidation Theory (Plastic Method)										
Consolidation Properties										
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)	MW	MW	MW	MW	MW	MW	MW	MW	MW	MW
OCR Manual Input Value	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input										
Preconsolidation pressure, σ'_p (kPa / psf)	1,031	1,032	1,031	1,031	1,031	1,031	1,559	1,887	1,887	1,886
Modified Primary Compression Index, C_{cc}	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291
Modified Recompression Index, C_{re}	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005
Modified Secondary Compression Index, $C_{\alpha\alpha}$	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%
ratio of t_2 / t_1	11.33	11.33	11.33	11.33	11.33	11.33	11.33	11.33	11.33	11.33
Settlements										
Primary Settlement, (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.066	0.052	0.048	0.052
Secondary Settlement (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.009	0.014	0.014	0.014
Total Settlement (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.075	0.066	0.062	0.066
Elastic or Plastic (E/P)										
	P	P	P	P	P	P	P	P	P	P
	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D
Settlement of Layer 19 (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.075	0.066	0.062	0.066

Written by: **Yiwen Cao** Date: **12/17/2009** Reviewed by: **R. Kulasingam/Jay Beech** Date: **12/17/2009**

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

Layer No.	20 YR2-6									
Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2	2
Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1
Midpoint Elevation, (m / ft)	438.93	438.62	438.31	438.01	438.12	437.94	430.81	429.67	429.90	429.66
Initial Effective Stress, σ'_i (kPa / psf)	1,031	1,032	1,031	1,031	1,031	1,031	1,676	2,077	2,077	2,076
Final Effective Stress, σ'_f (kPa/psf)	1,612	1,543	1,672	1,692	1,580	1,700	2,403	2,459	2,433	2,461
Elastic Method										
Modulus, E (kPa/psf)=										
Strain										
Settlement (m / ft)										
1-D Consolidation Theory (Plastic Method)										
Consolidation Properties										
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)	MW	MW	MW	MW	MW	MW	MW	MW	MW	MW
OCR Manual Input Value	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input										
Preconsolidation pressure, σ'_p (kPa / psf)	1,031	1,032	1,031	1,031	1,031	1,031	1,676	2,077	2,077	2,076
Modified Primary Compression Index, C_{cc}	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291
Modified Recompression Index, C_{re}	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005
Modified Secondary Compression Index, $C_{\alpha\alpha}$	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%
ratio of t_2 / t_1	11.33	11.33	11.33	11.33	11.33	11.33	11.33	11.33	11.33	11.33
Settlements										
Primary Settlement, (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.062	0.047	0.044	0.048
Secondary Settlement (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.009	0.014	0.014	0.014
Total Settlement (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.071	0.061	0.058	0.062
Elastic or Plastic (E/P)										
	P	P	P	P	P	P	P	P	P	P
	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D
Settlement of Layer 20 (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.071	0.061	0.058	0.062
Layer No.	21 YR2-7									
Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2	2
Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1
Midpoint Elevation, (m / ft)	438.93	438.62	438.31	438.01	438.12	437.94	429.44	427.46	427.69	427.45
Initial Effective Stress, σ'_i (kPa /psf)	1,031	1,032	1,031	1,031	1,031	1,031	1,794	2,267	2,267	2,267
Final Effective Stress, σ'_f (kPa/psf)	1,612	1,543	1,672	1,692	1,580	1,700	2,520	2,649	2,623	2,651
Elastic Method										
Modulus, E (kPa/psf)=										
Strain										
Settlement (m / ft)										
1-D Consolidation Theory (Plastic Method)										
Consolidation Properties										
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)	MW	MW	MW	MW	MW	MW	MW	MW	MW	MW
OCR Manual Input Value	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input										
Preconsolidation pressure, σ'_p (kPa / psf)	1,031	1,032	1,031	1,031	1,031	1,031	1,794	2,267	2,267	2,267
Modified Primary Compression Index, C_{cc}	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291
Modified Recompression Index, C_{re}	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005
Modified Secondary Compression Index, $C_{\alpha\alpha}$	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%
ratio of t_2 / t_1	11.33	11.33	11.33	11.33	11.33	11.33	11.33	11.33	11.33	11.33
Settlements										
Primary Settlement, (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.059	0.044	0.041	0.044
Secondary Settlement (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.009	0.014	0.014	0.014
Total Settlement (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.067	0.058	0.055	0.058
Elastic or Plastic (E/P)										
	P	P	P	P	P	P	P	P	P	P
	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D
Settlement of Layer 21 (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.067	0.058	0.055	0.058
Layer No.	22 YR1-1									
Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2	2
Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1
Midpoint Elevation, (m / ft)	437.64	437.33	437.02	436.72	436.83	436.65	428.39	426.35	426.58	426.34
Initial Effective Stress, σ'_i (kPa /psf)	1,142	1,143	1,142	1,142	1,142	1,142	1,884	2,362	2,362	2,362
Final Effective Stress, σ'_f (kPa/psf)	1,723	1,654	1,783	1,803	1,691	1,811	2,611	2,744	2,718	2,746
Elastic Method										
Modulus, E (kPa/psf)=										
Strain										
Settlement (m / ft)										
1-D Consolidation Theory (Plastic Method)										
Consolidation Properties										
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)	MW	MW	MW	MW	MW	MW	MW	MW	MW	MW
OCR Manual Input Value	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input										
Preconsolidation pressure, σ'_p (kPa / psf)	1,142	1,143	1,142	1,142	1,142	1,142	1,884	2,362	2,362	2,362
Modified Primary Compression Index, C_{cc}	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291
Modified Recompression Index, C_{re}	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005
Modified Secondary Compression Index, $C_{\alpha\alpha}$	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%
ratio of t_2 / t_1	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75
Settlements										
Primary Settlement, (m / ft)	0.134	0.121	0.145	0.149	0.128	0.150	0.031	0.000	0.000	0.000
Secondary Settlement (m / ft)	0.015	0.015	0.015	0.015	0.015	0.015	0.004	0.000	0.000	0.000
Total Settlement (m / ft)	0.149	0.135	0.160	0.164	0.143	0.165	0.035	0.000	0.000	0.000
Elastic or Plastic (E/P)										
	P	P	P	P	P	P	P	P	P	P
	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D
Settlement of Layer 22 (m / ft)	0.149	0.135	0.160	0.164	0.143	0.165	0.035	0.000	0.000	0.000

Written by: **Yiwen Cao** Date: **12/17/2009** Reviewed by: **R. Kulasingam/Jay Beech** Date: **12/17/2009**

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

	Layer No.	23		YR1-2											
		Initial Stress Reference Layer (top of layer)				2	2	2	2	2	2	2	2		
		Final Stress Reference Layer (top of layer)				1	1	1	1	1	1	1	1		
	Midpoint Elevation, (m / ft)	435.06	434.75	434.44	434.14	434.25	434.07	427.65	426.35	426.58	426.34				
	Initial Effective Stress, σ'_i (kPa /psf)	1,364	1,365	1,364	1,364	1,364	1,364	1,948	2,362	2,362	2,362				
	Final Effective Stress, σ'_f (kPa/psf)	1,945	1,876	2,005	2,025	1,913	2,033	2,674	2,744	2,718	2,746				
Elastic Method															
Modulus, E (kPa/psf)=												Strain			
												Settlement (m / ft)			
1-D Consolidation Theory (Plastic Method)															
Consolidation Properties															
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)															
OCR Manual Input Value															
OCR Computation Input															
Preconsolidation pressure, σ'_p (kPa / psf)															
Modified Primary Compression Index, C_{cc}															
Modified Recompression Index, C_{re}															
Modified Secondary Compression Index, $C_{\alpha\alpha}$															
ratio of t2 / t1															
Settlements															
Primary Settlement, (m / ft)															
Secondary Settlement (m / ft)															
Total Settlement (m / ft)															
Elastic or Plastic (E/P)															
1-D															
Settlement of Layer 23 (m / ft)															
	Layer No.	24		YR1-3											
		Initial Stress Reference Layer (top of layer)				2	2	2	2	2	2	2	2		
		Final Stress Reference Layer (top of layer)				1	1	1	1	1	1	1	1		
	Midpoint Elevation, (m / ft)	432.48	432.17	431.86	431.56	431.67	431.49	426.91	426.35	426.58	426.34				
	Initial Effective Stress, σ'_i (kPa /psf)	1,586	1,586	1,586	1,586	1,586	1,586	2,012	2,362	2,362	2,362				
	Final Effective Stress, σ'_f (kPa/psf)	2,167	2,097	2,227	2,247	2,135	2,254	2,738	2,744	2,718	2,746				
Elastic Method															
Modulus, E (kPa/psf)=												Strain			
												Settlement (m / ft)			
1-D Consolidation Theory (Plastic Method)															
Consolidation Properties															
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)															
OCR Manual Input Value															
OCR Computation Input															
Preconsolidation pressure, σ'_p (kPa / psf)															
Modified Primary Compression Index, C_{cc}															
Modified Recompression Index, C_{re}															
Modified Secondary Compression Index, $C_{\alpha\alpha}$															
ratio of t2 / t1															
Settlements															
Primary Settlement, (m / ft)															
Secondary Settlement (m / ft)															
Total Settlement (m / ft)															
Elastic or Plastic (E/P)															
1-D															
Settlement of Layer 24 (m / ft)															
	Layer No.	25		YR1-4											
		Initial Stress Reference Layer (top of layer)				2	2	2	2	2	2	2	2		
		Final Stress Reference Layer (top of layer)				1	1	1	1	1	1	1	1		
	Midpoint Elevation, (m / ft)	429.90	429.60	429.28	428.98	429.09	428.91	426.17	426.35	426.58	426.34				
	Initial Effective Stress, σ'_i (kPa /psf)	1,807.72	1,808.08	1,807.72	1,807.72	1,807.72	1,807.72	2,075.18	2,362.42	2,362.42	2,361.56				
	Final Effective Stress, σ'_f (kPa/psf)	2,388.88	2,319.03	2,448.96	2,469.05	2,356.44	2,476.37	2,801.49	2,744.36	2,717.62	2,746.39				
Elastic Method															
Modulus, E (kPa/psf)=												Strain			
												Settlement (m / ft)			
1-D Consolidation Theory (Plastic Method)															
Consolidation Properties															
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)															
OCR Manual Input Value															
OCR Computation Input															
Preconsolidation pressure, σ'_p (kPa / psf)															
Modified Primary Compression Index, C_{cc}															
Modified Recompression Index, C_{re}															
Modified Secondary Compression Index, $C_{\alpha\alpha}$															
ratio of t2 / t1															
Settlements															
Primary Settlement, (m / ft)															
Secondary Settlement (m / ft)															
Total Settlement (m / ft)															
Elastic or Plastic (E/P)															
1-D															
Settlement of Layer 25 (m / ft)															

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: Honeywell Project: Onondaga Lake SCA Final Design Project/ Proposal No.: GJ4299 Task No.: 04

	Layer No.	26 YR1-5									
	Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2	
	Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	
	Midpoint Elevation, (m / ft)	427.32	427.02	426.70	426.40	426.51	426.33	425.43	426.35	426.58	426.34
	Initial Effective Stress, σ'_i (kPa / psf)	2,029.60	2,029.81	2,029.60	2,029.60	2,029.60	2,029.60	2,138.82	2,362.42	2,362.42	2,361.56
	Final Effective Stress, σ'_f (kPa/psf)	2,610.76	2,540.76	2,670.84	2,690.93	2,578.32	2,698.25	2,865.13	2,744.36	2,717.62	2,746.39
Elastic Method											
Modulus, E (kPa/psf)=											
		Strain									
		Settlement (m / ft)									
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)		MW	MW	MW	MW	MW	MW	MW	MW	MW	MW
OCR Manual Input Value		1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)		2,030	2,030	2,030	2,030	2,030	2,030	2,139	2,362	2,362	2,362
Modified Primary Compression Index, C_{cc}		0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291
Modified Recompression Index, C_{re}		0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005
Modified Secondary Compression Index, $C_{\alpha\alpha}$		0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%
ratio of t_2 / t_1		8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75
Settlements											
Primary Settlement, (m / ft)		0.082	0.073	0.090	0.092	0.078	0.093	0.027	0.000	0.000	0.000
Secondary Settlement (m / ft)		0.015	0.015	0.015	0.015	0.015	0.015	0.004	0.000	0.000	0.000
Total Settlement (m / ft)		0.097	0.088	0.104	0.107	0.093	0.108	0.032	0.000	0.000	0.000
Elastic or Plastic (E/P)		P	P	P	P	P	P	P	P	P	P
		1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D
Settlement of Layer 26 (m / ft)		0.097	0.088	0.104	0.107	0.093	0.108	0.032	0.000	0.000	0.000
	Layer No.	27 YR1-6									
	Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2	2
	Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1
	Midpoint Elevation, (m / ft)	424.74	424.44	424.12	423.82	423.93	423.75	424.69	426.35	426.58	426.34
	Initial Effective Stress, σ'_i (kPa / psf)	2,251.48	2,251.55	2,251.48	2,251.48	2,251.48	2,251.48	2,202.46	2,362.42	2,362.42	2,361.56
	Final Effective Stress, σ'_f (kPa/psf)	2,832.64	2,762.50	2,892.72	2,912.81	2,800.20	2,920.13	2,928.77	2,744.36	2,717.62	2,746.39
Elastic Method											
Modulus, E (kPa/psf)=											
		Strain									
		Settlement (m / ft)									
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)		MW	MW	MW	MW	MW	MW	MW	MW	MW	MW
OCR Manual Input Value		1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)		2,251	2,252	2,251	2,251	2,251	2,251	2,202	2,362	2,362	2,362
Modified Primary Compression Index, C_{cc}		0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291
Modified Recompression Index, C_{re}		0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005
Modified Secondary Compression Index, $C_{\alpha\alpha}$		0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%
ratio of t_2 / t_1		8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75
Settlements											
Primary Settlement, (m / ft)		0.075	0.067	0.082	0.084	0.071	0.085	0.027	0.000	0.000	0.000
Secondary Settlement (m / ft)		0.015	0.015	0.015	0.015	0.015	0.015	0.004	0.000	0.000	0.000
Total Settlement (m / ft)		0.090	0.081	0.096	0.099	0.086	0.099	0.031	0.000	0.000	0.000
Elastic or Plastic (E/P)		P	P	P	P	P	P	P	P	P	P
		1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D
Settlement of Layer 27 (m / ft)		0.090	0.081	0.096	0.099	0.086	0.099	0.031	0.000	0.000	0.000

Written by: **Yiwen Cao** Date: **12/17/2009** Reviewed by: **R. Kulasingam/Jay Beech** Date: **12/17/2009**

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

Layer No.	Material										
1	Cover										
2	YR4-1	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
3	YR4-2	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
4	YR4-3	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
5	YR4-4	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
6	YR4-5	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
7	YR4-6	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
8	YR3-1	0.486	0.462	0.505	0.511	0.475	0.513	0.529	0.408	0.395	0.409
9	YR3-2	0.292	0.272	0.308	0.313	0.283	0.314	0.328	0.230	0.220	0.231
10	YR3-3	0.218	0.201	0.231	0.235	0.210	0.237	0.249	0.167	0.159	0.168
11	YR3-4	0.176	0.162	0.188	0.191	0.170	0.193	0.203	0.133	0.126	0.133
12	YR3-5	0.149	0.136	0.159	0.162	0.143	0.164	0.173	0.111	0.106	0.112
13	YR3-6	0.130	0.119	0.139	0.142	0.125	0.143	0.151	0.096	0.091	0.097
14	YR3-7	0.115	0.105	0.124	0.126	0.111	0.127	0.135	0.085	0.081	0.086
15	YR2-1	0.000	0.000	0.000	0.000	0.000	0.000	0.097	0.096	0.091	0.096
16	YR2-2	0.000	0.000	0.000	0.000	0.000	0.000	0.090	0.085	0.081	0.086
17	YR2-3	0.000	0.000	0.000	0.000	0.000	0.000	0.084	0.077	0.073	0.078
18	YR2-4	0.000	0.000	0.000	0.000	0.000	0.000	0.079	0.071	0.067	0.071
19	YR2-5	0.000	0.000	0.000	0.000	0.000	0.000	0.075	0.066	0.062	0.066
20	YR2-6	0.000	0.000	0.000	0.000	0.000	0.000	0.071	0.061	0.058	0.062
21	YR2-7	0.000	0.000	0.000	0.000	0.000	0.000	0.067	0.058	0.055	0.058
22	YR1-1	0.149	0.135	0.160	0.164	0.143	0.165	0.035	0.000	0.000	0.000
23	YR1-2	0.130	0.118	0.140	0.144	0.125	0.145	0.034	0.000	0.000	0.000
24	YR1-3	0.117	0.106	0.125	0.128	0.112	0.129	0.033	0.000	0.000	0.000
25	YR1-4	0.106	0.096	0.114	0.116	0.101	0.117	0.032	0.000	0.000	0.000
26	YR1-5	0.097	0.088	0.104	0.107	0.093	0.108	0.032	0.000	0.000	0.000
27	YR1-6	0.090	0.081	0.096	0.099	0.086	0.099	0.031	0.000	0.000	0.000
28	Additional Foundation Settlement	1.980	1.674	2.081	2.088	1.638	2.024	2.397	1.043	0.977	1.050
29											
30											
TOTAL SETTLEMENT		4.23	3.75	4.47	4.53	3.81	4.48	4.92	2.79	2.64	2.80

Line											
1	Top of Final Cover	451.53	451.12	451.17	450.98	450.87	451.02	451.43	454.22	454.37	454.21
2	Top of Year 4 Dredge	446.69	446.87	445.83	445.47	446.30	445.45	445.38	451.03	451.41	451.00
3		446.69	446.87	445.83	445.47	446.30	445.45	445.38	451.03	451.41	451.00
4		446.69	446.87	445.83	445.47	446.30	445.45	445.38	451.03	451.41	451.00
5		446.69	446.87	445.83	445.47	446.30	445.45	445.38	451.03	451.41	451.00
6		446.69	446.87	445.83	445.47	446.30	445.45	445.38	451.03	451.41	451.00
7		446.69	446.87	445.83	445.47	446.30	445.45	445.38	451.03	451.41	451.00
8	Top of Year 3 Dredge	446.69	446.87	445.83	445.47	446.30	445.45	445.38	451.03	451.41	451.00
9		445.46	445.61	444.62	444.27	445.06	444.25	444.19	449.73	450.09	449.70
10		444.04	444.17	443.21	442.87	443.63	442.85	442.81	448.24	448.59	448.21
11		442.54	442.66	441.73	441.39	442.13	441.38	441.34	446.70	447.04	446.67
12		441.01	441.10	440.21	439.87	440.58	439.86	439.83	445.11	445.45	445.09
13		439.44	439.53	438.65	438.32	439.01	438.31	438.29	443.51	443.84	443.49
14		437.86	437.93	437.08	436.75	437.43	436.74	436.73	441.89	442.22	441.87
15	Top of Year 2 Dredge	436.26	436.32	435.49	435.16	435.82	435.15	435.15	440.26	440.59	440.24
16		436.26	436.32	435.49	435.16	435.82	435.15	433.89	438.15	438.47	438.13
17		436.26	436.32	435.49	435.16	435.82	435.15	432.61	436.02	436.34	436.01
18		436.26	436.32	435.49	435.16	435.82	435.15	431.33	433.89	434.20	433.87
19		436.26	436.32	435.49	435.16	435.82	435.15	430.05	431.75	432.06	431.73
20		436.26	436.32	435.49	435.16	435.82	435.15	428.76	429.61	429.91	429.59
21		436.26	436.32	435.49	435.16	435.82	435.15	427.46	427.46	427.76	427.44
22	Top of Year 1 Dredge	436.26	436.32	435.49	435.16	435.82	435.15	426.17	425.31	425.60	425.29
23		433.83	433.88	433.07	432.75	433.39	432.74	425.46	425.31	425.60	425.29
24		431.38	431.42	430.63	430.31	430.93	430.30	424.76	425.31	425.60	425.29
25		428.92	428.95	428.17	427.86	428.46	427.85	424.05	425.31	425.60	425.29
26		426.44	426.46	425.71	425.40	425.98	425.39	423.34	425.31	425.60	425.29
27		423.96	423.97	423.23	422.92	423.50	422.92	422.63	425.31	425.60	425.29
28	Top of Gravel(Top of Incompressible)	421.47	421.48	420.75	420.44	421.00	420.44	421.92	425.31	425.60	425.29
29											
30											
31											

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

Attachment 6

**CASE 5: Settlement Analysis For Top of LPSL at the End of the
Operations Period (i.e., End of Year 4)
(Cross Section A, Points 26 to 35)**

Written by: **Yiwen Cao** Date: **12/17/2009** Reviewed by: **R. Kulasingam/Jay Beech** Date: **12/17/2009**

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

Settlement Prediction Model												
Programmer: Yiwen Cao, GeoSyntec Consultants												
Version Control V 1.002 11.14.2007												
Project: Onondaga Lake SCA Final												
Notes:												
Unit: ft / psf												
Average Compaction Effort = 1440.00 kPa or psf												
Consider Compaction Effort = N yes or no												
Point #												
Distance (meter or ft)	26	27	28	29	30	31	32	33	34	35		
	349.52	371.48	371.77	391.48	391.77	412.70	431.77	432.06	451.77	452.06		
ELEVATION (M/FT)	Line 1	Top of Dredge	460.01	460.01	460.01	460.01	460.01	460.01	460.01	460.01	460.01	460.01
	Line 2	Top of Dredge	460.01	460.01	460.01	460.01	460.01	460.01	460.01	460.01	460.01	460.01
	Line 3	Top of Gravel	430.01	430.01	430.01	430.01	430.01	430.01	430.01	430.01	430.01	430.01
	Line 4	Top of Clay	423.69	423.50	423.50	415.62	415.50	415.50	415.62	423.50	423.50	423.50
	Line 5	Top of Dike	421.45	421.82	421.70	413.85	413.85	413.94	413.93	421.82	421.93	421.93
	Line 6	Top of Subgrade	421.45	421.82	421.70	413.85	413.85	413.94	413.93	421.82	421.93	421.93
	Line 7		418.72	419.07	418.95	411.56	411.56	411.65	411.64	419.07	419.17	419.17
	Line 8		415.99	416.31	416.21	409.28	409.28	409.36	409.35	416.31	416.41	416.41
	Line 9		413.25	413.56	413.46	406.99	406.99	407.07	407.06	413.56	413.65	413.65
	Line 10		410.52	410.80	410.71	404.71	404.71	404.78	404.77	410.80	410.89	410.89
	Line 11		407.79	408.05	407.96	402.42	402.42	402.49	402.48	408.05	408.13	408.13
	Line 12		405.06	405.30	405.22	400.14	400.14	400.20	400.19	405.30	405.37	405.37
	Line 13		402.32	402.54	402.47	397.85	397.85	397.91	397.90	402.54	402.61	402.61
	Line 14		399.59	399.79	399.72	395.57	395.57	395.62	395.61	399.79	399.85	399.85
	Line 15		396.86	397.03	396.98	393.28	393.28	393.32	393.32	397.03	397.08	397.08
	Line 16		394.13	394.28	394.23	391.00	391.00	391.03	391.03	394.28	394.32	394.32
	Line 17		391.39	391.52	391.48	388.71	388.71	388.74	388.74	391.52	391.56	391.56
	Line 18		388.66	388.77	388.74	386.43	386.43	386.45	386.45	388.77	388.80	388.80
	Line 19		385.93	386.02	385.99	384.14	384.14	384.16	384.16	386.02	386.04	386.04
	Line 20		383.20	383.26	383.24	381.86	381.86	381.87	381.87	383.26	383.28	383.28
	Line 21		380.46	380.51	380.49	379.57	379.57	379.58	379.58	380.51	380.52	380.52
	Line 22		377.73	377.75	377.75	377.29	377.29	377.29	377.29	377.75	377.76	377.76
	Line 23	Bottom of Zone2 Above GW	375.00	375.00	375.00	375.00	375.00	375.00	375.00	375.00	375.00	375.00
	Line 24		375.00	375.00	375.00	375.00	375.00	375.00	375.00	375.00	375.00	375.00
	Line 25	Bottom of Zone 3 Above GW	375.00	375.00	375.00	375.00	375.00	375.00	375.00	375.00	375.00	375.00
	Line 26		370.00	370.00	370.00	370.00	370.00	370.00	370.00	370.00	370.00	370.00
	Line 27	Bottom of Zone 2 Below GW	365.00	365.00	365.00	365.00	365.00	365.00	365.00	365.00	365.00	365.00
	Line 28	Top of Incompressible Layer	365.00	365.00	365.00	365.00	365.00	365.00	365.00	365.00	365.00	365.00
	Line 29	GND for sigma _p	421.51	421.84	421.84	421.86	421.86	421.91	421.96	422.00	422.00	422.00
	Line 30	GW	375.00	375.00	375.00	375.00	375.00	375.00	375.00	375.00	375.00	375.00
	Line 31	ROCK	365.00	365.00	365.00	365.00	365.00	365.00	365.00	365.00	365.00	365.00
LAYER THICKNESS (M/FT)	Layer No.	From To	Material									
	1	1 2	Null Layer	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	2	2 3	Dredge	30.00	30.00	30.00	30.00	30.00	30.00	30.00	30.00	30.00
	3	3 4	Gravel	6.32	6.51	6.51	14.39	14.51	14.51	14.39	6.51	6.51
	4	4 5	Clay	2.24	1.68	1.80	1.77	1.65	1.56	1.57	1.68	1.57
	5	5 6	Dike	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6	6 7	Zone2-Above-GW-1	2.73	2.75	2.75	2.29	2.29	2.29	2.29	2.75	2.76
	7	7 8	Zone2-Above-GW-2	2.73	2.75	2.75	2.29	2.29	2.29	2.29	2.75	2.76
	8	8 9	Zone2-Above-GW-3	2.73	2.75	2.75	2.29	2.29	2.29	2.29	2.75	2.76
	9	9 10	Zone2-Above-GW-4	2.73	2.75	2.75	2.29	2.29	2.29	2.29	2.75	2.76
	10	10 11	Zone2-Above-GW-5	2.73	2.75	2.75	2.29	2.29	2.29	2.29	2.75	2.76
	11	11 12	Zone2-Above-GW-6	2.73	2.75	2.75	2.29	2.29	2.29	2.29	2.75	2.76
	12	12 13	Zone2-Above-GW-7	2.73	2.75	2.75	2.29	2.29	2.29	2.29	2.75	2.76
	13	13 14	Zone2-Above-GW-8	2.73	2.75	2.75	2.29	2.29	2.29	2.29	2.75	2.76
	14	14 15	Zone2-Above-GW-9	2.73	2.75	2.75	2.29	2.29	2.29	2.29	2.75	2.76
	15	15 16	Zone2-Above-GW-10	2.73	2.75	2.75	2.29	2.29	2.29	2.29	2.75	2.76
	16	16 17	Zone2-Above-GW-11	2.73	2.75	2.75	2.29	2.29	2.29	2.29	2.75	2.76
	17	17 18	Zone2-Above-GW-12	2.73	2.75	2.75	2.29	2.29	2.29	2.29	2.75	2.76
	18	18 19	Zone2-Above-GW-13	2.73	2.75	2.75	2.29	2.29	2.29	2.29	2.75	2.76
	19	19 20	Zone2-Above-GW-14	2.73	2.75	2.75	2.29	2.29	2.29	2.29	2.75	2.76
	20	20 21	Zone2-Above-GW-15	2.73	2.75	2.75	2.29	2.29	2.29	2.29	2.75	2.76
	21	21 22	Zone2-Above-GW-16	2.73	2.75	2.75	2.29	2.29	2.29	2.29	2.75	2.76
	22	22 23	Zone2-Above-GW-17	2.73	2.75	2.75	2.29	2.29	2.29	2.29	2.75	2.76
	23	23 24	Zone3-Above-GW-1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	24	24 25	Zone3-Above-GW-2	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	25	25 26	Zone2-Below-GW-18	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00
	26	26 27	Zone2-Below-GW-19	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00
	27	27 28	Zone3-Below-GW-3	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	28											
	29	29 30	Soil Above GW	46.51	46.84	46.84	46.86	46.86	46.91	46.96	47.00	47.00
	30	30 31	Soil Below GW	10.00	10.00	10.00	10.00	10.00	10.00	10.00	10.00	10.00
	Thickness Check											
		From Line To Line	SUM	95.01	95.01	95.01	95.01	95.01	95.01	95.01	95.01	95.01
		1 28	Thickness =	95.01	95.01	95.01	95.01	95.01	95.01	95.01	95.01	95.01
	Thickness Check			OK	OK	OK	OK	OK	OK	OK	OK	OK

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: Honeywell Project: Onondaga Lake SCA Final Design Project/ Proposal No.: GJ4299 Task No.: 04

UNIT WEIGHT	Layer No.	Material										
	1	Null Layer	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	2	Dredge	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	3	Gravel	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0
	4	Clay	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0
	5	Dike	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0
	6	Zone2-Above-GW-1	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	7	Zone2-Above-GW-2	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	8	Zone2-Above-GW-3	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	9	Zone2-Above-GW-4	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	10	Zone2-Above-GW-5	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	11	Zone2-Above-GW-6	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	12	Zone2-Above-GW-7	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	13	Zone2-Above-GW-8	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	14	Zone2-Above-GW-9	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	15	Zone2-Above-GW-10	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	16	Zone2-Above-GW-11	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	17	Zone2-Above-GW-12	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	18	Zone2-Above-GW-13	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	19	Zone2-Above-GW-14	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	20	Zone2-Above-GW-15	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	21	Zone2-Above-GW-16	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	22	Zone2-Above-GW-17	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	23	Zone3-Above-GW-1	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	24	Zone3-Above-GW-2	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	25	Zone2-Below-GW-18	19.6	19.6	19.6	19.6	19.6	19.6	19.6	19.6	19.6	19.6
	26	Zone2-Below-GW-19	19.6	19.6	19.6	19.6	19.6	19.6	19.6	19.6	19.6	19.6
	27	Zone3-Below-GW-3	19.6	19.6	19.6	19.6	19.6	19.6	19.6	19.6	19.6	19.6
	28											
	29	Soil Above GW	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	30	Soil below GW	19.6	19.6	19.6	19.6	19.6	19.6	19.6	19.6	19.6	19.6
	Layer No.	1	Null Layer									
			Initial Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1
			Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1
			Midpoint Elevation, (m / ft)	460.01	460.01	460.01	460.01	460.01	460.01	460.01	460.01	460.01
			Initial Effective Stress, σ'_i (kPa / psf)	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight
Elastic Method	Modulus, E (kPa/psf)=		Strain									
			Settlement (m / ft)									
1-D Consolidation Theory (Plastic Method)												
Consolidation Properties												
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)												
OCR Manual Input Value												
OCR Computation Input												
Preconsolidation pressure, σ'_p (kPa / psf)												
Modified Primary Compression Index, C_{cc}												
Modified Recompression Index, C_{re}												
Modified Secondary Compression Index, C_{α}												
ratio of t_2 / t_1												
Settlements												
Primary Settlement, (m / ft)												
Secondary Settlement (m / ft)												
Total Settlement (m / ft)												
Elastic or Plastic (E/P)												
Settlement of Layer 1 (m / ft)												

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: Honeywell Project: Onondaga Lake SCA Final Design Project/ Proposal No.: GJ4299 Task No.: 04

	Layer No. 2	Dredge									
	Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2	
	Final Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2	
	Midpoint Elevation, (m / ft)	445.01	445.01	445.01	445.01	445.01	445.01	445.01	445.01	445.01	
	Initial Effective Stress, σ'_i (kPa /psf)	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	
	Final Effective Stress, σ'_f (kPa/psf)	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	
Elastic Method											
Modulus, E (kPa/psf)=		Strain									
		Settlement (m / ft)									
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)											
OCR Manual Input Value											
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)											
Modified Primary Compression Index, C_{cc}											
Modified Recompression Index, C_{re}											
Modified Secondary Compression Index, $C_{\alpha cc}$											
ratio of t_2 / t_1											
Settlements											
Primary Settlement, (m / ft)											
Secondary Settlement (m / ft)											
Total Settlement (m / ft)											
Elastic or Plastic (E/P)											
Settlement of Layer 2 (m / ft)											
	Layer No. 3	Gravel									
	Initial Stress Reference Layer (top of layer)	3	3	3	3	3	3	3	3	3	
	Final Stress Reference Layer (top of layer)	3	3	3	3	3	3	3	3	3	
	Midpoint Elevation, (m / ft)	426.85	426.76	426.76	422.82	422.76	422.76	422.76	422.82	426.76	
	Initial Effective Stress, σ'_i (kPa /psf)	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	
	Final Effective Stress, σ'_f (kPa/psf)	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	
Elastic Method											
Modulus, E (kPa/psf)=		Strain									
		Settlement (m / ft)									
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)											
OCR Manual Input Value											
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)											
Modified Primary Compression Index, C_{cc}											
Modified Recompression Index, C_{re}											
Modified Secondary Compression Index, $C_{\alpha cc}$											
ratio of t_2 / t_1											
Settlements											
Primary Settlement, (m / ft)											
Secondary Settlement (m / ft)											
Total Settlement (m / ft)											
Elastic or Plastic (E/P)											
Settlement of Layer 3 (m / ft)											
	Layer No. 4	Clay									
	Initial Stress Reference Layer (top of layer)	4	4	4	4	4	4	4	4	4	
	Final Stress Reference Layer (top of layer)	4	4	4	4	4	4	4	4	4	
	Midpoint Elevation, (m / ft)	422.57	422.66	422.60	414.74	414.68	414.72	414.72	414.78	422.66	
	Initial Effective Stress, σ'_i (kPa /psf)	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	
	Final Effective Stress, σ'_f (kPa/psf)	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	
Elastic Method											
Modulus, E (kPa/psf)=		Strain									
		Settlement (m / ft)									
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)											
OCR Manual Input Value											
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)											
Modified Primary Compression Index, C_{cc}											
Modified Recompression Index, C_{re}											
Modified Secondary Compression Index, $C_{\alpha cc}$											
ratio of t_2 / t_1											
Settlements											
Primary Settlement, (m / ft)											
Secondary Settlement (m / ft)											
Total Settlement (m / ft)											
Elastic or Plastic (E/P)											
Settlement of Layer 4 (m / ft)											

Written by: **Yiwen Cao** Date: **12/17/2009** Reviewed by: **R. Kulasingam/Jay Beech** Date: **12/17/2009**

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

Layer No. 5	Dike										
Initial Stress Reference Layer (top of layer)		5	5	5	5	5	5	5	5	5	5
Final Stress Reference Layer (top of layer)		5	5	5	5	5	5	5	5	5	5
Midpoint Elevation, (m / ft)		421.45	421.82	421.70	413.85	413.85	413.94	413.93	413.93	421.82	421.93
Initial Effective Stress, σ'_i (kPa / psf)		Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight
Final Effective Stress, σ'_f (kPa/psf)		Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight
Elastic Method											
Modulus, E (kPa/psf)=	Strain										
	Settlement (m / ft)										
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)											
OCR Manual Input Value											
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)											
Modified Primary Compression Index, C_{ce}											
Modified Recompression Index, C_{re}											
Modified Secondary Compression Index, $C_{\alpha\alpha}$											
ratio of t_2 / t_1											
Settlements											
Primary Settlement, (m / ft)											
Secondary Settlement (m / ft)											
Total Settlement (m / ft)											
Elastic or Plastic (E/P)											
Settlement of Layer 5 (m / ft)											
Layer No. 6	Zone2-Above-GW-1										
Initial Stress Reference Layer (top of layer)		6	6	6	6	6	6	6	6	6	6
Final Stress Reference Layer (top of layer)		1	1	1	1	1	1	1	1	1	1
Midpoint Elevation, (m / ft)		420.08	420.44	420.33	412.71	412.71	412.79	412.79	412.79	420.44	420.55
Initial Effective Stress, σ'_i (kPa / psf)		112	113	113	94	94	94	94	94	113	113
Final Effective Stress, σ'_f (kPa/psf)		3,723	3,437	3,437	5,157	5,285	4,633	5,256	5,256	3,424	3,435
Elastic Method											
Modulus, E (kPa/psf)=	Strain										
	Settlement (m / ft)										
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)											
OCR Manual Input Value											
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)											
Modified Primary Compression Index, C_{ce}											
Modified Recompression Index, C_{re}											
Modified Secondary Compression Index, $C_{\alpha\alpha}$											
ratio of t_2 / t_1											
Settlements											
Primary Settlement, (m / ft)											
Secondary Settlement (m / ft)											
Total Settlement (m / ft)											
Elastic or Plastic (E/P)											
Settlement of Layer 6 (m / ft)											
Layer No. 7	Zone2-Above-GW-2										
Initial Stress Reference Layer (top of layer)		6	6	6	6	6	6	6	6	6	6
Final Stress Reference Layer (top of layer)		1	1	1	1	1	1	1	1	1	1
Midpoint Elevation, (m / ft)		417.35	417.69	417.58	410.42	410.42	410.50	410.50	410.50	417.69	417.79
Initial Effective Stress, σ'_i (kPa / psf)		336	339	338	281	281	282	282	282	339	340
Final Effective Stress, σ'_f (kPa/psf)		3,940	3,638	3,691	5,381	5,381	4,844	5,352	5,352	3,660	3,661
Elastic Method											
Modulus, E (kPa/psf)=	Strain										
	Settlement (m / ft)										
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)											
OCR Manual Input Value											
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)											
Modified Primary Compression Index, C_{ce}											
Modified Recompression Index, C_{re}											
Modified Secondary Compression Index, $C_{\alpha\alpha}$											
ratio of t_2 / t_1											
Settlements											
Primary Settlement, (m / ft)											
Secondary Settlement (m / ft)											
Total Settlement (m / ft)											
Elastic or Plastic (E/P)											
Settlement of Layer 7 (m / ft)											

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: Honeywell Project: Onondaga Lake SCA Final Design Project/ Proposal No.: GJ4299 Task No.: 04

Layer No.	8	Zone2-Above-GW-3									
Initial Stress Reference Layer (top of layer)	6	6	6	6	6	6	6	6	6	6	6
Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1	1
Midpoint Elevation, (m / ft)	414.62	414.93	414.83	408.14	408.14	408.21	408.21	408.21	414.93	415.03	
Initial Effective Stress, σ'_i (kPa / psf)	560	565	563	468	468	470	469	469	565	566	
Final Effective Stress, σ'_f (kPa/psf)	4,157	3,860	3,859	5,307	5,473	5,061	5,361	5,361	3,883	3,885	
Elastic Method											
Modulus, E (kPa/psf)=		Strain									
		Settlement (m / ft)									
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)	MS	MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value	4.5	4.5	4.5	2.0	2.0	2.0	2.0	2.0	4.5	4.5	
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)	2,544	2,547	2,584	2,251	2,251	2,247	2,255	2,255	2,607	2,572	
Modified Primary Compression Index, C_{cc}	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	
Modified Recompression Index, C_{re}	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	
Modified Secondary Compression Index, $C_{\alpha\alpha}$	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	
ratio of t_2 / t_1	8	8	8	8	8	8	8	8	8	8	
Settlements											
Primary Settlement, (m / ft)	0.293	0.254	0.245	0.413	0.427	0.393	0.418	0.418	0.245	0.253	
Secondary Settlement (m / ft)	0.022	0.023	0.023	0.019	0.019	0.019	0.019	0.019	0.023	0.023	
Total Settlement (m / ft)	0.316	0.277	0.268	0.432	0.446	0.412	0.437	0.437	0.267	0.275	
Elastic or Plastic (E/P)											
Settlement of Layer 8 (m / ft)	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	
	0.316	0.277	0.268	0.432	0.446	0.412	0.437	0.437	0.267	0.275	
Layer No.	9	Zone2-Above-GW-4									
Initial Stress Reference Layer (top of layer)	6	6	6	6	6	6	6	6	6	6	
Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1	
Midpoint Elevation, (m / ft)	411.89	412.18	412.09	405.85	405.85	405.92	405.92	405.92	412.18	412.27	
Initial Effective Stress, σ'_i (kPa / psf)	784	790	788	656	656	657	657	657	790	792	
Final Effective Stress, σ'_f (kPa/psf)	4,362	4,109	4,107	5,424	5,502	5,309	5,476	5,476	4,130	4,102	
Elastic Method											
Modulus, E (kPa/psf)=		Strain									
		Settlement (m / ft)									
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)	MS	MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value	4.5	4.5	4.5	2.0	2.0	2.0	2.0	2.0	4.5	4.5	
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)	3,552	3,563	3,598	2,626	2,626	2,622	2,631	2,631	3,623	3,591	
Modified Primary Compression Index, C_{cc}	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	
Modified Recompression Index, C_{re}	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	
Modified Secondary Compression Index, $C_{\alpha\alpha}$	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	
ratio of t_2 / t_1	8	8	8	8	8	8	8	8	8	8	
Settlements											
Primary Settlement, (m / ft)	0.137	0.104	0.098	0.350	0.357	0.342	0.355	0.355	0.098	0.099	
Secondary Settlement (m / ft)	0.022	0.023	0.023	0.019	0.019	0.019	0.019	0.019	0.023	0.023	
Total Settlement (m / ft)	0.160	0.126	0.121	0.369	0.376	0.361	0.374	0.373	0.120	0.121	
Elastic or Plastic (E/P)											
Settlement of Layer 9 (m / ft)	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	
	0.160	0.126	0.121	0.369	0.376	0.361	0.374	0.373	0.120	0.121	
Layer No.	10	Zone2-Above-GW-5									
Initial Stress Reference Layer (top of layer)	6	6	6	6	6	6	6	6	6	6	
Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1	
Midpoint Elevation, (m / ft)	409.15	409.43	409.34	403.57	403.57	403.63	403.63	403.63	409.43	409.51	
Initial Effective Stress, σ'_i (kPa / psf)	1,008	1,016	1,014	843	843	845	845	845	1,016	1,019	
Final Effective Stress, σ'_f (kPa/psf)	4,564	4,371	4,385	5,625	5,625	5,523	5,600	5,600	4,372	4,374	
Elastic Method											
Modulus, E (kPa/psf)=		Strain									
		Settlement (m / ft)									
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)	MS	MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)	2,027	2,035	2,050	3,001	3,001	2,998	3,006	3,006	2,062	2,049	
Modified Primary Compression Index, C_{cc}	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	
Modified Recompression Index, C_{re}	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	
Modified Secondary Compression Index, $C_{\alpha\alpha}$	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	
ratio of t_2 / t_1	8	8	8	8	8	8	8	8	8	8	
Settlements											
Primary Settlement, (m / ft)	0.455	0.432	0.429	0.305	0.304	0.297	0.302	0.302	0.425	0.430	
Secondary Settlement (m / ft)	0.022	0.023	0.023	0.019	0.019	0.019	0.019	0.019	0.023	0.023	
Total Settlement (m / ft)	0.477	0.455	0.452	0.323	0.323	0.316	0.321	0.321	0.448	0.453	
Elastic or Plastic (E/P)											
Settlement of Layer 10 (m / ft)	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	
	0.477	0.455	0.452	0.323	0.323	0.316	0.321	0.321	0.448	0.453	

Written by: **Yiwen Cao** Date: **12/17/2009** Reviewed by: **R. Kulasingam/Jay Beech** Date: **12/17/2009**

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

Layer No.	11	Zone2-Above-GW-6									
Initial Stress Reference Layer (top of layer)	6	6	6	6	6	6	6	6	6	6	6
Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1	1
Midpoint Elevation, (m / ft)	406.42	406.67	406.59	401.28	401.28	401.34	401.34	401.34	406.67	406.75	
Initial Effective Stress, σ'_i (kPa / psf)	1,232	1,242	1,239	1,031	1,031	1,033	1,033	1,033	1,242	1,245	
Final Effective Stress, σ'_f (kPa/psf)	4,778	4,621	4,618	5,638	5,708	5,750	5,685	5,685	4,643	4,646	
Elastic Method											
Modulus, E (kPa/psf)=											
Strain											
Settlement (m / ft)											
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)	MS	MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value	2.0	2.0	2.0	1.0	1.0	1.0	1.0	1.0	2.0	2.0	
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)	2,475	2,487	2,500	1,688	1,688	1,687	1,691	1,691	2,514	2,502	
Modified Primary Compression Index, C_{cc}	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	
Modified Recompression Index, C_{re}	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	
Modified Secondary Compression Index, $C_{\alpha\alpha}$	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	
ratio of t_2 / t_1	8	8	8	8	8	8	8	8	8	8	
Settlements											
Primary Settlement, (m / ft)	0.371	0.353	0.348	0.558	0.563	0.568	0.562	0.562	0.349	0.353	
Secondary Settlement (m / ft)	0.022	0.023	0.023	0.019	0.019	0.019	0.019	0.019	0.023	0.023	
Total Settlement (m / ft)	0.393	0.375	0.371	0.576	0.582	0.587	0.580	0.580	0.372	0.376	
Elastic or Plastic (E/P)											
Settlement of Layer 11 (m / ft)	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	
	0.393	0.375	0.371	0.576	0.582	0.587	0.580	0.580	0.372	0.376	
Layer No.	12	Zone2-Above-GW-7									
Initial Stress Reference Layer (top of layer)	6	6	6	6	6	6	6	6	6	6	
Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1	
Midpoint Elevation, (m / ft)	403.69	403.92	403.84	399.00	399.00	399.05	399.05	399.05	403.92	403.99	
Initial Effective Stress, σ'_i (kPa / psf)	1,456	1,468	1,464	1,218	1,218	1,221	1,221	1,221	1,468	1,471	
Final Effective Stress, σ'_f (kPa/psf)	4,986	4,904	4,900	5,852	5,852	5,950	5,831	5,831	4,927	4,888	
Elastic Method											
Modulus, E (kPa/psf)=											
Strain											
Settlement (m / ft)											
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)	MS	MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value	2.0	2.0	2.0	1.0	1.0	1.0	1.0	1.0	2.0	2.0	
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)	2,923	2,939	2,951	1,875	1,875	1,875	1,879	1,879	2,965	2,954	
Modified Primary Compression Index, C_{cc}	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	
Modified Recompression Index, C_{re}	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	
Modified Secondary Compression Index, $C_{\alpha\alpha}$	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	
ratio of t_2 / t_1	8	8	8	8	8	8	8	8	8	8	
Settlements											
Primary Settlement, (m / ft)	0.303	0.293	0.290	0.526	0.526	0.534	0.524	0.524	0.291	0.289	
Secondary Settlement (m / ft)	0.022	0.023	0.023	0.019	0.019	0.019	0.019	0.019	0.023	0.023	
Total Settlement (m / ft)	0.326	0.316	0.313	0.544	0.544	0.553	0.543	0.543	0.314	0.312	
Elastic or Plastic (E/P)											
Settlement of Layer 12 (m / ft)	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	
	0.326	0.316	0.313	0.544	0.544	0.553	0.543	0.543	0.314	0.312	
Layer No.	13	Zone2-Above-GW-8									
Initial Stress Reference Layer (top of layer)	6	6	6	6	6	6	6	6	6	6	
Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1	
Midpoint Elevation, (m / ft)	400.96	401.16	401.10	396.71	396.71	396.76	396.76	396.76	401.16	401.23	
Initial Effective Stress, σ'_i (kPa / psf)	1,680	1,694	1,689	1,405	1,405	1,409	1,408	1,408	1,694	1,698	
Final Effective Stress, σ'_f (kPa/psf)	5,201	5,193	5,188	5,907	6,001	6,143	5,948	5,948	5,184	5,174	
Elastic Method											
Modulus, E (kPa/psf)=											
Strain											
Settlement (m / ft)											
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)	MS	MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)	1,686	1,695	1,701	2,063	2,063	2,062	2,066	2,067	1,709	1,704	
Modified Primary Compression Index, C_{cc}	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	
Modified Recompression Index, C_{re}	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	
Modified Secondary Compression Index, $C_{\alpha\alpha}$	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	
ratio of t_2 / t_1	8	8	8	8	8	8	8	8	8	8	
Settlements											
Primary Settlement, (m / ft)	0.615	0.616	0.612	0.486	0.493	0.505	0.489	0.489	0.611	0.613	
Secondary Settlement (m / ft)	0.022	0.023	0.023	0.019	0.019	0.019	0.019	0.019	0.023	0.023	
Total Settlement (m / ft)	0.638	0.639	0.635	0.504	0.512	0.524	0.508	0.508	0.633	0.635	
Elastic or Plastic (E/P)											
Settlement of Layer 13 (m / ft)	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	
	0.638	0.639	0.635	0.504	0.512	0.524	0.508	0.508	0.633	0.635	

Written by: **Yiwen Cao** Date: **12/17/2009** Reviewed by: **R. Kulasingam/Jay Beech** Date: **12/17/2009**

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

Layer No.	14	Zone2-Above-GW-9									
Initial Stress Reference Layer (top of layer)	6	6	6	6	6	6	6	6	6	6	6
Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1	1
Midpoint Elevation, (m / ft)	398.23	398.41	398.35	394.43	394.43	394.47	394.47	394.47	398.41	398.47	398.47
Initial Effective Stress, σ'_i (kPa / psf)	1,904	1,920	1,915	1,593	1,593	1,597	1,596	1,596	1,920	1,924	1,924
Final Effective Stress, σ'_f (kPa/psf)	5,423	5,450	5,494	6,066	6,124	6,326	6,106	6,106	5,473	5,477	5,477
Elastic Method											
Modulus, E (kPa/psf)=											
Strain											
Settlement (m / ft)											
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)	MS	MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)	1,910	1,921	1,926	2,250	2,250	2,250	2,254	2,254	1,934	1,930	1,930
Modified Primary Compression Index, C_{ce}	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460
Modified Recompression Index, C_{re}	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014
Modified Secondary Compression Index, $C_{\alpha\alpha}$	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%
ratio of t_2 / t_1	8	8	8	8	8	8	8	8	8	8	8
Settlements											
Primary Settlement, (m / ft)	0.570	0.574	0.575	0.458	0.462	0.478	0.461	0.461	0.572	0.575	0.575
Secondary Settlement (m / ft)	0.022	0.023	0.023	0.019	0.019	0.019	0.019	0.019	0.023	0.023	0.023
Total Settlement (m / ft)	0.592	0.596	0.598	0.476	0.481	0.497	0.479	0.479	0.595	0.598	0.598
Elastic or Plastic (E/P)	P	P	P	P	P	P	P	P	P	P	P
Settlement of Layer 14 (m / ft)	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D
	0.592	0.596	0.598	0.476	0.481	0.497	0.479	0.479	0.595	0.598	0.598
Layer No.	15	Zone2-Above-GW-10									
Initial Stress Reference Layer (top of layer)	6	6	6	6	6	6	6	6	6	6	6
Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1	1
Midpoint Elevation, (m / ft)	395.49	395.66	395.60	392.14	392.14	392.18	392.18	392.18	395.66	395.70	395.70
Initial Effective Stress, σ'_i (kPa / psf)	2,129	2,145	2,140	1,780	1,780	1,784	1,784	1,784	2,145	2,150	2,150
Final Effective Stress, σ'_f (kPa/psf)	5,648	5,736	5,731	6,284	6,284	6,505	6,267	6,267	5,758	5,715	5,715
Elastic Method											
Modulus, E (kPa/psf)=											
Strain											
Settlement (m / ft)											
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)	MS	MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)	2,134	2,147	2,151	2,437	2,437	2,438	2,442	2,442	2,160	2,156	2,156
Modified Primary Compression Index, C_{ce}	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460
Modified Recompression Index, C_{re}	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014
Modified Secondary Compression Index, $C_{\alpha\alpha}$	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%
ratio of t_2 / t_1	8	8	8	8	8	8	8	8	8	8	8
Settlements											
Primary Settlement, (m / ft)	0.531	0.541	0.538	0.437	0.437	0.453	0.436	0.435	0.539	0.538	0.538
Secondary Settlement (m / ft)	0.022	0.023	0.023	0.019	0.019	0.019	0.019	0.019	0.023	0.023	0.023
Total Settlement (m / ft)	0.554	0.563	0.560	0.456	0.456	0.472	0.454	0.454	0.562	0.560	0.560
Elastic or Plastic (E/P)	P	P	P	P	P	P	P	P	P	P	P
Settlement of Layer 15 (m / ft)	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D
	0.554	0.563	0.560	0.456	0.456	0.472	0.454	0.454	0.562	0.560	0.560
Layer No.	16	Zone2-Above-GW-11									
Initial Stress Reference Layer (top of layer)	6	6	6	6	6	6	6	6	6	6	6
Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1	1
Midpoint Elevation, (m / ft)	392.76	392.90	392.86	389.85	389.85	389.89	389.89	389.89	392.90	392.94	392.94
Initial Effective Stress, σ'_i (kPa / psf)	2,353	2,371	2,365	1,968	1,968	1,972	1,972	1,972	2,371	2,377	2,377
Final Effective Stress, σ'_f (kPa/psf)	5,879	6,017	6,011	6,373	6,423	6,665	6,407	6,407	6,036	5,994	5,994
Elastic Method											
Modulus, E (kPa/psf)=											
Strain											
Settlement (m / ft)											
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)	MS	MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)	2,358	2,373	2,376	2,625	2,625	2,626	2,630	2,630	2,386	2,383	2,383
Modified Primary Compression Index, C_{ce}	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460
Modified Recompression Index, C_{re}	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014
Modified Secondary Compression Index, $C_{\alpha\alpha}$	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%
ratio of t_2 / t_1	8	8	8	8	8	8	8	8	8	8	8
Settlements											
Primary Settlement, (m / ft)	0.499	0.512	0.509	0.409	0.413	0.430	0.411	0.411	0.511	0.509	0.509
Secondary Settlement (m / ft)	0.022	0.023	0.023	0.019	0.019	0.019	0.019	0.019	0.023	0.023	0.023
Total Settlement (m / ft)	0.521	0.535	0.532	0.428	0.431	0.449	0.430	0.430	0.533	0.532	0.532
Elastic or Plastic (E/P)	P	P	P	P	P	P	P	P	P	P	P
Settlement of Layer 16 (m / ft)	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D
	0.521	0.535	0.532	0.428	0.431	0.449	0.430	0.430	0.533	0.532	0.532

Written by: **Yiwen Cao** Date: **12/17/2009** Reviewed by: **R. Kulasingam/Jay Beech** Date: **12/17/2009**

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

	Layer No. 17	Zone2-Above-GW-12									
	Initial Stress Reference Layer (top of layer)	6	6	6	6	6	6	6	6	6	
	Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	
	Midpoint Elevation, (m / ft)	390.03	390.15	390.11	387.57	387.57	387.60	387.60	387.60	390.15	390.18
	Initial Effective Stress, σ'_i (kPa /psf)	2,577	2,597	2,590	2,155	2,155	2,160	2,159	2,159	2,597	2,603
	Final Effective Stress, σ'_f (kPa/psf)	6,108	6,267	6,308	6,588	6,588	6,835	6,574	6,574	6,285	6,291
Elastic Method											
Modulus, E (kPa/psf)=		Strain									
		Settlement (m / ft)									
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)		MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value		1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)		2,582	2,598	2,602	2,812	2,812	2,814	2,818	2,818	2,612	2,609
Modified Primary Compression Index, C_{cc}		0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460
Modified Recompression Index, C_{re}		0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014
Modified Secondary Compression Index, $C_{\alpha\alpha}$		0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%
ratio of t_2 / t_1		8	8	8	8	8	8	8	8	8	8
Settlements											
Primary Settlement, (m / ft)		0.470	0.484	0.486	0.392	0.392	0.410	0.391	0.391	0.483	0.485
Secondary Settlement (m / ft)		0.022	0.023	0.023	0.019	0.019	0.019	0.019	0.019	0.023	0.023
Total Settlement (m / ft)		0.492	0.507	0.509	0.411	0.411	0.429	0.410	0.410	0.506	0.508
Elastic or Plastic (E/P)											
		p	p	p	p	p	p	p	p	p	p
		1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D
Settlement of Layer 17 (m / ft)		0.492	0.507	0.509	0.411	0.411	0.429	0.410	0.410	0.506	0.508
	Layer No. 18	Zone2-Above-GW-13									
	Initial Stress Reference Layer (top of layer)	6	6	6	6	6	6	6	6	6	
	Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	
	Midpoint Elevation, (m / ft)	387.30	387.39	387.36	385.28	385.28	385.31	385.31	385.31	387.39	387.42
	Initial Effective Stress, σ'_i (kPa /psf)	2,801	2,823	2,816	2,342	2,342	2,348	2,347	2,347	2,823	2,830
	Final Effective Stress, σ'_f (kPa/psf)	6,344	6,537	6,530	6,694	6,755	7,003	6,724	6,724	6,553	6,560
Elastic Method											
Modulus, E (kPa/psf)=		Strain									
		Settlement (m / ft)									
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)		MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value		1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)		2,806	2,824	2,827	2,999	3,000	3,002	3,005	3,005	2,838	2,835
Modified Primary Compression Index, C_{cc}		0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460
Modified Recompression Index, C_{re}		0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014
Modified Secondary Compression Index, $C_{\alpha\alpha}$		0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%
ratio of t_2 / t_1		8	8	8	8	8	8	8	8	8	8
Settlements											
Primary Settlement, (m / ft)		0.445	0.462	0.460	0.370	0.374	0.391	0.372	0.372	0.461	0.463
Secondary Settlement (m / ft)		0.022	0.023	0.023	0.019	0.019	0.019	0.019	0.019	0.023	0.023
Total Settlement (m / ft)		0.468	0.484	0.482	0.389	0.393	0.410	0.391	0.391	0.483	0.485
Elastic or Plastic (E/P)											
		p	p	p	p	p	p	p	p	p	p
		1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D
Settlement of Layer 18 (m / ft)		0.468	0.484	0.482	0.389	0.393	0.410	0.391	0.391	0.483	0.485
	Layer No. 19	Zone2-Above-GW-14									
	Initial Stress Reference Layer (top of layer)	6	6	6	6	6	6	6	6	6	
	Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	
	Midpoint Elevation, (m / ft)	384.56	384.64	384.61	383.00	383.00	383.02	383.02	383.02	384.64	384.66
	Initial Effective Stress, σ'_i (kPa /psf)	3,025	3,049	3,041	2,530	2,530	2,536	2,535	2,535	3,049	3,056
	Final Effective Stress, σ'_f (kPa/psf)	6,582	6,800	6,793	6,865	6,906	7,147	6,894	6,894	6,814	6,779
Elastic Method											
Modulus, E (kPa/psf)=		Strain									
		Settlement (m / ft)									
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)		MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value		1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)		3,030	3,050	3,052	3,187	3,187	3,189	3,193	3,193	3,064	3,062
Modified Primary Compression Index, C_{cc}		0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460
Modified Recompression Index, C_{re}		0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014
Modified Secondary Compression Index, $C_{\alpha\alpha}$		0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%
ratio of t_2 / t_1		8	8	8	8	8	8	8	8	8	8
Settlements											
Primary Settlement, (m / ft)		0.424	0.441	0.439	0.354	0.356	0.372	0.355	0.355	0.440	0.438
Secondary Settlement (m / ft)		0.022	0.023	0.023	0.019	0.019	0.019	0.019	0.019	0.023	0.023
Total Settlement (m / ft)		0.446	0.464	0.462	0.372	0.375	0.391	0.374	0.374	0.463	0.461
Elastic or Plastic (E/P)											
		p	p	p	p	p	p	p	p	p	p
		1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D
Settlement of Layer 19 (m / ft)		0.446	0.464	0.462	0.372	0.375	0.391	0.374	0.374	0.463	0.461

Written by: **Yiwen Cao** Date: **12/17/2009** Reviewed by: **R. Kulasingam/Jay Beech** Date: **12/17/2009**

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

	Layer No.	Zone2-Above-GW-15									
	Initial Stress Reference Layer (top of layer)										
	Final Stress Reference Layer (top of layer)										
	Midpoint Elevation, (m / ft)	381.83	381.89	381.87	380.71	380.71	380.73	380.73	380.73	381.89	381.90
	Initial Effective Stress, σ'_i (kPa /psf)	3,249	3,275	3,266	2,717	2,717	2,724	2,723	2,723	3,275	3,282
	Final Effective Stress, σ'_f (kPa/psf)	6,814	7,042	7,074	7,076	7,076	7,312	7,065	7,065	7,055	7,062
Elastic Method											
Modulus, E (kPa/psf)=											Strain
											Settlement (m / ft)
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)											
OCR Manual Input Value											
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)											
Modified Primary Compression Index, C_{cc}											
Modified Recompression Index, C_{re}											
Modified Secondary Compression Index, $C_{\alpha\alpha}$											
ratio of t_2 / t_1											
Settlements											
Primary Settlement, (m / ft)											
Secondary Settlement (m / ft)											
Total Settlement (m / ft)											
Elastic or Plastic (E/P)											
Settlement of Layer 20 (m / ft)											
	Layer No.	Zone2-Above-GW-16									
	Initial Stress Reference Layer (top of layer)										
	Final Stress Reference Layer (top of layer)										
	Midpoint Elevation, (m / ft)	379.10	379.13	379.12	378.43	378.43	378.44	378.44	378.44	379.13	379.14
	Initial Effective Stress, σ'_i (kPa /psf)	3,473	3,500	3,492	2,905	2,905	2,911	2,911	2,911	3,500	3,509
	Final Effective Stress, σ'_f (kPa/psf)	7,054	7,296	7,287	7,196	7,230	7,453	7,221	7,221	7,307	7,315
Elastic Method											
Modulus, E (kPa/psf)=											Strain
											Settlement (m / ft)
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)											
OCR Manual Input Value											
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)											
Modified Primary Compression Index, C_{cc}											
Modified Recompression Index, C_{re}											
Modified Secondary Compression Index, $C_{\alpha\alpha}$											
ratio of t_2 / t_1											
Settlements											
Primary Settlement, (m / ft)											
Secondary Settlement (m / ft)											
Total Settlement (m / ft)											
Elastic or Plastic (E/P)											
Settlement of Layer 21 (m / ft)											
	Layer No.	Zone2-Above-GW-17									
	Initial Stress Reference Layer (top of layer)										
	Final Stress Reference Layer (top of layer)										
	Midpoint Elevation, (m / ft)	376.37	376.38	376.37	376.14	376.14	376.15	376.15	376.15	376.38	376.38
	Initial Effective Stress, σ'_i (kPa /psf)	3,697	3,726	3,717	3,092	3,092	3,099	3,098	3,098	3,726	3,735
	Final Effective Stress, σ'_f (kPa/psf)	7,293	7,544	7,535	7,402	7,402	7,617	7,394	7,394	7,553	7,527
Elastic Method											
Modulus, E (kPa/psf)=											Strain
											Settlement (m / ft)
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)											
OCR Manual Input Value											
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)											
Modified Primary Compression Index, C_{cc}											
Modified Recompression Index, C_{re}											
Modified Secondary Compression Index, $C_{\alpha\alpha}$											
ratio of t_2 / t_1											
Settlements											
Primary Settlement, (m / ft)											
Secondary Settlement (m / ft)											
Total Settlement (m / ft)											
Elastic or Plastic (E/P)											
Settlement of Layer 22 (m / ft)											

Written by: **Yiwen Cao** Date: **12/17/2009** Reviewed by: **R. Kulasingam/Jay Beech** Date: **12/17/2009**

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

Layer No.	23	Zone3-Above-GW-1								
Initial Stress Reference Layer (top of layer)	6	6	6	6	6	6	6	6	6	6
Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1
Midpoint Elevation, (m / ft)	375.00	375.00	375.00	375.00	375.00	375.00	375.00	375.00	375.00	375.00
Initial Effective Stress, σ'_i (kPa / psf)	3,809	3,839	3,829	3,186	3,186	3,193	3,192	3,192	3,839	3,848
Final Effective Stress, σ'_f (kPa/psf)	7,405	7,667	7,682	7,450	7,480	7,687	7,473	7,473	7,666	7,651
Elastic Method										
Modulus, E (kPa/psf)=										
Strain										
Settlement (m / ft)										
1-D Consolidation Theory (Plastic Method)										
Consolidation Properties										
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)	MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input										
Preconsolidation pressure, σ'_p (kPa / psf)	3,814	3,841	3,841	3,843	3,843	3,847	3,850	3,850	3,854	3,854
Modified Primary Compression Index, C_{cc}	0.380	0.380	0.380	0.380	0.380	0.380	0.380	0.380	0.380	0.380
Modified Recompression Index, C_{re}	0.021	0.021	0.021	0.021	0.021	0.021	0.021	0.021	0.021	0.021
Modified Secondary Compression Index, $C_{\alpha\alpha}$	0.70%	0.70%	0.70%	0.70%	0.70%	0.70%	0.70%	0.70%	0.70%	0.70%
ratio of t_2 / t_1	8	8	8	8	8	8	8	8	8	8
Settlements										
Primary Settlement, (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Secondary Settlement (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Total Settlement (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Elastic or Plastic (E/P)										
1-D	P	P	P	P	P	P	P	P	P	P
Settlement of Layer 23 (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Layer No.	24	Zone3-Above-GW-2								
Initial Stress Reference Layer (top of layer)	6	6	6	6	6	6	6	6	6	6
Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1
Midpoint Elevation, (m / ft)	375.00	375.00	375.00	375.00	375.00	375.00	375.00	375.00	375.00	375.00
Initial Effective Stress, σ'_i (kPa / psf)	3,809	3,839	3,829	3,186	3,186	3,193	3,192	3,192	3,839	3,848
Final Effective Stress, σ'_f (kPa/psf)	7,405	7,667	7,682	7,450	7,480	7,687	7,473	7,473	7,666	7,651
Elastic Method										
Modulus, E (kPa/psf)=										
Strain										
Settlement (m / ft)										
1-D Consolidation Theory (Plastic Method)										
Consolidation Properties										
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)	MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input										
Preconsolidation pressure, σ'_p (kPa / psf)	3,814	3,841	3,841	3,843	3,843	3,847	3,850	3,850	3,854	3,854
Modified Primary Compression Index, C_{cc}	0.380	0.380	0.380	0.380	0.380	0.380	0.380	0.380	0.380	0.380
Modified Recompression Index, C_{re}	0.021	0.021	0.021	0.021	0.021	0.021	0.021	0.021	0.021	0.021
Modified Secondary Compression Index, $C_{\alpha\alpha}$	0.70%	0.70%	0.70%	0.70%	0.70%	0.70%	0.70%	0.70%	0.70%	0.70%
ratio of t_2 / t_1	8	8	8	8	8	8	8	8	8	8
Settlements										
Primary Settlement, (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Secondary Settlement (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Total Settlement (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Elastic or Plastic (E/P)										
1-D	P	P	P	P	P	P	P	P	P	P
Settlement of Layer 24 (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Layer No.	25	Zone2-Below-GW-18								
Initial Stress Reference Layer (top of layer)	6	6	6	6	6	6	6	6	6	6
Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1
Midpoint Elevation, (m / ft)	372.50	372.50	372.50	372.50	372.50	372.50	372.50	372.50	372.50	372.50
Initial Effective Stress, σ'_i (kPa / psf)	3,858	3,888	3,878	3,235	3,235	3,242	3,241	3,241	3,888	3,897
Final Effective Stress, σ'_f (kPa/psf)	7,469	7,724	7,714	7,514	7,514	7,713	7,508	7,508	7,732	7,741
Elastic Method										
Modulus, E (kPa/psf)=										
Strain										
Settlement (m / ft)										
1-D Consolidation Theory (Plastic Method)										
Consolidation Properties										
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)	MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input										
Preconsolidation pressure, σ'_p (kPa / psf)	3,863	3,890	3,890	3,892	3,892	3,896	3,899	3,899	3,903	3,903
Modified Primary Compression Index, C_{cc}	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460
Modified Recompression Index, C_{re}	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014
Modified Secondary Compression Index, $C_{\alpha\alpha}$	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%
ratio of t_2 / t_1	8	8	8	8	8	8	8	8	8	8
Settlements										
Primary Settlement, (m / ft)	0.659	0.685	0.684	0.663	0.663	0.688	0.660	0.660	0.683	0.684
Secondary Settlement (m / ft)	0.041	0.041	0.041	0.041	0.041	0.041	0.041	0.041	0.041	0.041
Total Settlement (m / ft)	0.700	0.726	0.725	0.704	0.704	0.729	0.701	0.701	0.724	0.725
Elastic or Plastic (E/P)										
1-D	P	P	P	P	P	P	P	P	P	P
Settlement of Layer 25 (m / ft)	0.700	0.726	0.725	0.704	0.704	0.729	0.701	0.701	0.724	0.725

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: Honeywell Project: Onondaga Lake SCA Final Design Project/ Proposal No.: GJ4299 Task No.: 04

	Layer No.	26 Zone2-Below-GW-19									
		Initial Stress Reference Layer (top of layer)									
		Final Stress Reference Layer (top of layer)									
	Midpoint Elevation, (m / ft)	367.50	367.50	367.50	367.50	367.50	367.50	367.50	367.50	367.50	367.50
	Initial Effective Stress, σ'_i (kPa /psf)	3,956	3,986	3,976	3,333	3,333	3,340	3,339	3,339	3,986	3,995
	Final Effective Stress, σ'_f (kPa/psf)	7,587	7,841	7,831	7,570	7,570	7,743	7,565	7,565	7,848	7,857
Elastic Method											
Modulus, E (kPa/psf)=											Strain
											Settlement (m / ft)
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)											
OCR Manual Input Value											
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)											
Modified Primary Compression Index, C_{cc}											
Modified Recompression Index, C_{re}											
Modified Secondary Compression Index, $C_{\alpha\alpha}$											
ratio of t_2 / t_1											
Settlements											
Primary Settlement, (m / ft)											
Secondary Settlement (m / ft)											
Total Settlement (m / ft)											
Elastic or Plastic (E/P)											
Settlement of Layer 26 (m / ft)											
	Layer No.	27 Zone3-Below-GW-3									
		Initial Stress Reference Layer (top of layer)									
		Final Stress Reference Layer (top of layer)									
	Midpoint Elevation, (m / ft)	365.00	365.00	365.00	365.00	365.00	365.00	365.00	365.00	365.00	365.00
	Initial Effective Stress, σ'_i (kPa /psf)	4,005	4,035	4,025	3,382	3,382	3,389	3,388	3,388	4,035	4,044
	Final Effective Stress, σ'_f (kPa/psf)	7,642	7,898	7,888	7,570	7,592	7,750	7,589	7,589	7,906	7,889
Elastic Method											
Modulus, E (kPa/psf)=											Strain
											Settlement (m / ft)
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)											
OCR Manual Input Value											
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)											
Modified Primary Compression Index, C_{cc}											
Modified Recompression Index, C_{re}											
Modified Secondary Compression Index, $C_{\alpha\alpha}$											
ratio of t_2 / t_1											
Settlements											
Primary Settlement, (m / ft)											
Secondary Settlement (m / ft)											
Total Settlement (m / ft)											
Elastic or Plastic (E/P)											
Settlement of Layer 27 (m / ft)											

Written by: **Yiwen Cao** Date: **12/17/2009** Reviewed by: **R. Kulasingam/Jay Beech** Date: **12/17/2009**

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

[illegible]

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

Attachment 7

CASE 6: Settlement Analysis for Top of Dredge Material in Geo-tubes at
the End of the Operations Period (i.e., End of Year 4)
(Cross Section A, Points 26 to 35)

Written by: **Yiwen Cao** Date: **12/17/2009** Reviewed by: **R. Kulasingam/Jay Beech** Date: **12/17/2009**

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

Settlement Prediction Model												
Programmer: Yiwen Cao, GeoSyntec Consultants												
Version Control V 1.002 11.14.2007												
Project: Onondaga Lake SCA Final												
Notes:												
Unit: ft / psf												
Average Compaction Effort = 1440.00 kPa or psf												
Consider Compaction Effort = N yes or no												
Point #												
Distance (meter or ft)	26	27	28	29	30	31	32	33	34	35		
	349.52	371.48	371.77	391.48	391.77	412.70	431.77	432.06	451.77	452.06		
ELEVATION (M/FT)	Line 1	Top of Year 4 Dredge	460.01	460.01	460.01	460.01	460.01	460.01	460.01	460.01	460.01	460.01
	Line 2	Top of Year 4 Dredge	460.01	460.01	460.01	460.01	460.01	460.01	460.01	460.01	460.01	460.01
	Line 3		460.01	460.01	460.01	460.01	460.01	460.01	460.01	460.01	460.01	460.01
	Line 4		460.01	460.01	460.01	460.01	460.01	460.01	460.01	460.01	460.01	460.01
	Line 5		460.01	460.01	460.01	460.01	460.01	460.01	460.01	460.01	460.01	460.01
	Line 6		460.01	460.01	460.01	460.01	460.01	460.01	460.01	460.01	460.01	460.01
	Line 7		460.01	460.01	460.01	460.01	460.01	460.01	460.01	460.01	460.01	460.01
	Line 8	Top of Year 3 Dredge	460.01	460.01	460.01	460.01	460.01	460.01	460.01	460.01	460.01	460.01
	Line 9		458.29	458.29	458.29	458.29	458.29	458.29	458.29	458.29	458.29	458.29
	Line 10		456.58	456.58	456.58	456.58	456.58	456.58	456.58	456.58	456.58	456.58
	Line 11		454.86	454.86	454.86	454.86	454.86	454.86	454.86	454.86	454.86	454.86
	Line 12		453.15	453.15	453.15	453.15	453.15	453.15	453.15	453.15	453.15	453.15
	Line 13		451.43	451.43	451.43	451.43	451.43	451.43	451.43	451.43	451.43	451.43
	Line 14		449.72	449.72	449.72	449.72	449.72	449.72	449.72	449.72	449.72	449.72
	Line 15	Top of Year 2 Dredge	448.00	448.00	448.00	448.00	448.00	448.00	448.00	448.00	448.00	448.00
	Line 16		448.00	448.00	448.00	448.00	448.00	448.00	448.00	448.00	448.00	448.00
	Line 17		448.00	448.00	448.00	448.00	448.00	448.00	448.00	448.00	448.00	448.00
	Line 18		448.00	448.00	448.00	448.00	448.00	448.00	448.00	448.00	448.00	448.00
	Line 19		448.00	448.00	448.00	448.00	448.00	448.00	448.00	448.00	448.00	448.00
	Line 20		448.00	448.00	448.00	448.00	448.00	448.00	448.00	448.00	448.00	448.00
	Line 21		448.00	448.00	448.00	448.00	448.00	448.00	448.00	448.00	448.00	448.00
	Line 22	Top of Year 1 Dredge	448.00	448.00	448.00	448.00	448.00	448.00	448.00	448.00	448.00	448.00
	Line 23		445.01	445.01	445.01	445.00	445.00	445.00	445.00	445.00	445.00	445.00
	Line 24		442.01	442.01	442.01	442.01	442.01	442.01	442.01	442.01	442.01	442.01
	Line 25		439.01	439.01	439.01	439.01	439.01	439.01	439.01	439.01	439.01	439.01
	Line 26		436.01	436.01	436.01	436.01	436.01	436.01	436.01	436.01	436.01	436.01
	Line 27		433.01	433.01	433.01	433.01	433.01	433.01	433.01	433.01	433.01	433.01
	Line 28	Top of Gravel(Top of Incompressible)	430.01	430.01	430.01	430.01	430.01	430.01	430.01	430.01	430.01	430.01
	Line 29	GND for sigma _p	421.51	421.84	421.84	421.86	421.86	421.91	421.96	421.96	422.00	422.00
	Line 30	GW	375.00	375.00	375.00	375.00	375.00	375.00	375.00	375.00	375.00	375.00
	Line 31	ROCK	365.00	365.00	365.00	365.00	365.00	365.00	365.00	365.00	365.00	365.00
LAYER THICKNESS (M/FT)	Layer No.	From To	Material									
	1	1 2	Null Layer									
	2	2 3	YR4-1									
	3	3 4	YR4-2									
	4	4 5	YR4-3									
	5	5 6	YR4-4									
	6	6 7	YR4-5									
	7	7 8	YR4-6									
	8	8 9	YR3-1									
	9	9 10	YR3-2									
	10	10 11	YR3-3									
	11	11 12	YR3-4									
	12	12 13	YR3-5									
	13	13 14	YR3-6									
	14	14 15	YR3-7									
	15	15 16	YR2-1									
	16	16 17	YR2-2									
	17	17 18	YR2-3									
	18	18 19	YR2-4									
	19	19 20	YR2-5									
	20	20 21	YR2-6									
	21	21 22	YR2-7									
	22	22 23	YR1-1									
	23	23 24	YR1-2									
	24	24 25	YR1-3									
	25	25 26	YR1-4									
	26	26 27	YR1-5									
	27	27 28	YR1-6									
	28											
	29											
	30											
	Thickness Check											
		From Line To Line	SUM	30.00	30.00	30.00	30.00	30.00	30.00	30.00	30.00	30.00
		1 28	Thickness =	30.00	30.00	30.00	30.00	30.00	30.00	30.00	30.00	30.00
			Thickness Check	OK	OK	OK	OK	OK	OK	OK	OK	OK

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: Honeywell Project: Onondaga Lake SCA Final Design Project/ Proposal No.: GJ4299 Task No.: 04

UNIT WEIGHT	Layer No.	Material										
	1	Null Layer	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	2	YR4-1	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	3	YR4-2	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	4	YR4-3	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	5	YR4-4	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	6	YR4-5	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	7	YR4-6	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	8	YR3-1	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	9	YR3-2	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	10	YR3-3	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	11	YR3-4	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	12	YR3-5	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	13	YR3-6	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	14	YR3-7	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	15	YR2-1	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	16	YR2-2	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	17	YR2-3	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	18	YR2-4	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	19	YR2-5	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	20	YR2-6	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	21	YR2-7	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	22	YR1-1	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	23	YR1-2	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	24	YR1-3	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	25	YR1-4	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	26	YR1-5	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	27	YR1-6	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	28											
	29		82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	30	Soil below GW	19.6	19.6	19.6	19.6	19.6	19.6	19.6	19.6	19.6	19.6
	Layer No.	1	Null Layer									
		Initial Stress Reference Layer (top of layer)										
		Final Stress Reference Layer (top of layer)										
		Midpoint Elevation, (m / ft)	460.01	460.01	460.01	460.01	460.01	460.01	460.01	460.01	460.01	460.01
		Initial Effective Stress, σ'_i (kPa / psf)	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight
Elastic Method			Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight
Modulus, E (kPa/psf)=			Strain									
			Settlement (m / ft)									
1-D Consolidation Theory (Plastic Method)												
Consolidation Properties												
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)												
OCR Manual Input Value												
OCR Computation Input												
Preconsolidation pressure, σ'_p (kPa / psf)												
Modified Primary Compression Index, C_{ci}												
Modified Recompression Index, C_{re}												
Modified Secondary Compression Index, C_{α}												
ratio of t_2 / t_1												
Settlements												
Primary Settlement, (m / ft)												
Secondary Settlement (m / ft)												
Total Settlement (m / ft)												
			Elastic or Plastic (E/P)									
			Settlement of Layer 1 (m / ft)									

Written by: **Yiwen Cao** Date: **12/17/2009** Reviewed by: **R. Kulasingam/Jay Beech** Date: **12/17/2009**

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

	Layer No. 2	YR4-1									
	Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2	
	Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	
	Midpoint Elevation, (m / ft)	460.01	460.01	460.01	460.01	460.01	460.01	460.01	460.01	460.01	
	Initial Effective Stress, σ'_i (kPa /psf)	0.02	0.02	0.02	0.02	0.02	0.03	0.03	0.03	0.03	
	Final Effective Stress, σ'_f (kPa/psf)	0.02	0.02	0.02	0.02	0.02	0.03	0.03	0.03	0.03	
Elastic Method											
Modulus, E (kPa/psf)=		Strain									
		Settlement (m / ft)									
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)		MW	MW	MW	MW	MW	MW	MW	MW	MW	MW
OCR Manual Input Value		1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)		0	0	0	0	0	0	0	0	0	0
Modified Primary Compression Index, C_{cc}		0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291
Modified Recompression Index, C_{re}		0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005
Modified Secondary Compression Index, $C_{\alpha\alpha}$		0.08%	0.08%	0.08%	0.08%	0.08%	0.08%	0.08%	0.08%	0.08%	0.08%
ratio of t2 / t1		2	2	2	2	2	2	2	2	2	2
Settlements											
Primary Settlement, (m / ft)		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Secondary Settlement (m / ft)		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Total Settlement (m / ft)		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Elastic or Plastic (E/P)		P	P	P	P	P	P	P	P	P	P
Settlement of Layer 2 (m / ft)		1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D
		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	Layer No. 3	YR4-2									
	Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2	
	Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	
	Midpoint Elevation, (m / ft)	460.01	460.01	460.01	460.01	460.01	460.01	460.01	460.01	460.01	
	Initial Effective Stress, σ'_i (kPa /psf)	0.05	0.06	0.06	0.07	0.07	0.08	0.09	0.09	0.10	
	Final Effective Stress, σ'_f (kPa/psf)	0.05	0.06	0.06	0.07	0.07	0.08	0.09	0.09	0.10	
Elastic Method											
Modulus, E (kPa/psf)=		Strain									
		Settlement (m / ft)									
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)		MW	MW	MW	MW	MW	MW	MW	MW	MW	MW
OCR Manual Input Value		1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)		0	0	0	0	0	0	0	0	0	0
Modified Primary Compression Index, C_{cc}		0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291
Modified Recompression Index, C_{re}		0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005
Modified Secondary Compression Index, $C_{\alpha\alpha}$		0.08%	0.08%	0.08%	0.08%	0.08%	0.08%	0.08%	0.08%	0.08%	0.08%
ratio of t2 / t1		2	2	2	2	2	2	2	2	2	2
Settlements											
Primary Settlement, (m / ft)		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Secondary Settlement (m / ft)		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Total Settlement (m / ft)		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Elastic or Plastic (E/P)		P	P	P	P	P	P	P	P	P	P
Settlement of Layer 3 (m / ft)		1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D
		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	Layer No. 4	YR4-3									
	Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2	
	Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	
	Midpoint Elevation, (m / ft)	460.01	460.01	460.01	460.01	460.01	460.01	460.01	460.01	460.01	
	Initial Effective Stress, σ'_i (kPa /psf)	0.09	0.10	0.10	0.12	0.12	0.13	0.15	0.15	0.16	
	Final Effective Stress, σ'_f (kPa/psf)	0.09	0.10	0.10	0.12	0.12	0.13	0.15	0.15	0.16	
Elastic Method											
Modulus, E (kPa/psf)=		Strain									
		Settlement (m / ft)									
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)		MW	MW	MW	MW	MW	MW	MW	MW	MW	MW
OCR Manual Input Value		1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)		0	0	0	0	0	0	0	0	0	0
Modified Primary Compression Index, C_{cc}		0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291
Modified Recompression Index, C_{re}		0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005
Modified Secondary Compression Index, $C_{\alpha\alpha}$		0.08%	0.08%	0.08%	0.08%	0.08%	0.08%	0.08%	0.08%	0.08%	0.08%
ratio of t2 / t1		2	2	2	2	2	2	2	2	2	2
Settlements											
Primary Settlement, (m / ft)		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Secondary Settlement (m / ft)		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Total Settlement (m / ft)		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Elastic or Plastic (E/P)		P	P	P	P	P	P	P	P	P	P
Settlement of Layer 4 (m / ft)		1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D
		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000

Written by: **Yiwen Cao** Date: **12/17/2009** Reviewed by: **R. Kulasingam/Jay Beech** Date: **12/17/2009**

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

	Layer No. 5	YR4-4								
	Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2
	Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1
	Midpoint Elevation, (m / ft)	460.01	460.01	460.01	460.01	460.01	460.01	460.01	460.01	460.01
	Initial Effective Stress, σ'_i (kPa /psf)	0.12	0.14	0.14	0.16	0.16	0.18	0.20	0.20	0.22
	Final Effective Stress, σ'_f (kPa/psf)	0.12	0.14	0.14	0.16	0.16	0.18	0.20	0.20	0.22
Elastic Method										
Modulus, E (kPa/psf)=		Strain								
		Settlement (m / ft)								
1-D Consolidation Theory (Plastic Method)										
Consolidation Properties										
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)		MW	MW	MW	MW	MW	MW	MW	MW	MW
OCR Manual Input Value		1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input										
Preconsolidation pressure, σ'_p (kPa / psf)		0	0	0	0	0	0	0	0	0
Modified Primary Compression Index, C_{cc}		0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291
Modified Recompression Index, C_{re}		0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005
Modified Secondary Compression Index, $C_{\alpha\alpha}$		0.08%	0.08%	0.08%	0.08%	0.08%	0.08%	0.08%	0.08%	0.08%
ratio of t_2 / t_1		2	2	2	2	2	2	2	2	2
Settlements										
Primary Settlement, (m / ft)		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Secondary Settlement (m / ft)		0.00000	0.00000	0.00000	0.00000	0.00000	0.00000	0.00000	0.00000	0.00000
Total Settlement (m / ft)		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Elastic or Plastic (E/P)		P	P	P	P	P	P	P	P	P
Settlement of Layer 5 (m / ft)		1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D
		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	Layer No. 6	YR4-5								
	Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2
	Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1
	Midpoint Elevation, (m / ft)	460.01	460.01	460.01	460.01	460.01	460.01	460.01	460.01	460.01
	Initial Effective Stress, σ'_i (kPa /psf)	0.16	0.18	0.19	0.21	0.21	0.24	0.26	0.26	0.29
	Final Effective Stress, σ'_f (kPa/psf)	0.16	0.18	0.19	0.21	0.21	0.24	0.26	0.26	0.29
Elastic Method										
Modulus, E (kPa/psf)=		Strain								
		Settlement (m / ft)								
1-D Consolidation Theory (Plastic Method)										
Consolidation Properties										
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)		MW	MW	MW	MW	MW	MW	MW	MW	MW
OCR Manual Input Value		1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input										
Preconsolidation pressure, σ'_p (kPa / psf)		0	0	0	0	0	0	0	0	0
Modified Primary Compression Index, C_{cc}		0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291
Modified Recompression Index, C_{re}		0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005
Modified Secondary Compression Index, $C_{\alpha\alpha}$		0.08%	0.08%	0.08%	0.08%	0.08%	0.08%	0.08%	0.08%	0.08%
ratio of t_2 / t_1		2	2	2	2	2	2	2	2	2
Settlements										
Primary Settlement, (m / ft)		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Secondary Settlement (m / ft)		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Total Settlement (m / ft)		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Elastic or Plastic (E/P)		P	P	P	P	P	P	P	P	P
Settlement of Layer 6 (m / ft)		1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D
		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	Layer No. 7	YR4-6								
	Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2
	Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1
	Midpoint Elevation, (m / ft)	460.01	460.01	460.01	460.01	460.01	460.01	460.01	460.01	460.01
	Initial Effective Stress, σ'_i (kPa /psf)	0.19	0.23	0.23	0.26	0.26	0.29	0.32	0.32	0.35
	Final Effective Stress, σ'_f (kPa/psf)	0.19	0.23	0.23	0.26	0.26	0.29	0.32	0.32	0.35
Elastic Method										
Modulus, E (kPa/psf)=		Strain								
		Settlement (m / ft)								
1-D Consolidation Theory (Plastic Method)										
Consolidation Properties										
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)		MW	MW	MW	MW	MW	MW	MW	MW	MW
OCR Manual Input Value		1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input										
Preconsolidation pressure, σ'_p (kPa / psf)		0	0	0	0	0	0	0	0	0
Modified Primary Compression Index, C_{cc}		0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291
Modified Recompression Index, C_{re}		0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005
Modified Secondary Compression Index, $C_{\alpha\alpha}$		0.08%	0.08%	0.08%	0.08%	0.08%	0.08%	0.08%	0.08%	0.08%
ratio of t_2 / t_1		2	2	2	2	2	2	2	2	2
Settlements										
Primary Settlement, (m / ft)		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Secondary Settlement (m / ft)		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Total Settlement (m / ft)		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Elastic or Plastic (E/P)		P	P	P	P	P	P	P	P	P
Settlement of Layer 7 (m / ft)		1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D
		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000

Written by: **Yiwen Cao** Date: **12/17/2009** Reviewed by: **R. Kulasingam/Jay Beech** Date: **12/17/2009**

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

	Layer No.	8		YR3-1																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																															</
--	-----------	---	--	-------	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	----

Written by: **Yiwen Cao** Date: **12/17/2009** Reviewed by: **R. Kulasingam/Jay Beech** Date: **12/17/2009**

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

	Layer No.	11YR3-4									
	Initial Stress Reference Layer (top of layer)		8	8	8	8	8	8	8	8	
	Final Stress Reference Layer (top of layer)		1	1	1	1	1	1	1	1	
	Midpoint Elevation, (m / ft)		454.01	454.01	454.01	454.01	454.01	454.00	454.00	454.00	454.00
	Initial Effective Stress, σ'_i (kPa /psf)		516.14	516.13	516.13	516.13	516.13	516.12	516.11	516.10	516.10
	Final Effective Stress, σ'_f (kPa/psf)		516.35	516.38	516.38	516.41	516.41	516.43	516.46	516.46	516.49
Elastic Method											
Modulus, E (kPa/psf)=			Strain								
			Settlement (m / ft)								
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)			MW	MW	MW	MW	MW	MW	MW	MW	MW
OCR Manual Input Value			1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)			516	516	516	516	516	516	516	516	516
Modified Primary Compression Index, C_{cc}			0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291
Modified Recompression Index, C_{re}			0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005
Modified Secondary Compression Index, $C_{\alpha\alpha}$			0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%
ratio of t2 / t1			4	4	4	4	4	4	4	4	4
Settlements											
Primary Settlement, (m / ft)			0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Secondary Settlement (m / ft)			0.006	0.006	0.006	0.006	0.006	0.006	0.006	0.006	0.006
Total Settlement (m / ft)			0.006	0.006	0.006	0.006	0.006	0.006	0.006	0.006	0.006
Elastic or Plastic (E/P)											
1-D			P	P	P	P	P	P	P	P	P
Settlement of Layer 11 (m / ft)			0.006	0.006	0.006	0.006	0.006	0.006	0.006	0.006	0.006
	Layer No.	12YR3-5									
	Initial Stress Reference Layer (top of layer)		8	8	8	8	8	8	8	8	8
	Final Stress Reference Layer (top of layer)		1	1	1	1	1	1	1	1	1
	Midpoint Elevation, (m / ft)		452.29	452.29	452.29	452.29	452.29	452.29	452.29	452.29	452.29
	Initial Effective Stress, σ'_i (kPa /psf)		663.61	663.60	663.60	663.59	663.59	663.58	663.57	663.57	663.56
	Final Effective Stress, σ'_f (kPa/psf)		663.82	663.85	663.85	663.87	663.87	663.90	663.92	663.92	663.94
Elastic Method											
Modulus, E (kPa/psf)=			Strain								
			Settlement (m / ft)								
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)			MW	MW	MW	MW	MW	MW	MW	MW	MW
OCR Manual Input Value			1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)			664	664	664	664	664	664	664	664	664
Modified Primary Compression Index, C_{cc}			0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291
Modified Recompression Index, C_{re}			0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005
Modified Secondary Compression Index, $C_{\alpha\alpha}$			0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%
ratio of t2 / t1			4	4	4	4	4	4	4	4	4
Settlements											
Primary Settlement, (m / ft)			0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Secondary Settlement (m / ft)			0.006	0.006	0.006	0.006	0.006	0.006	0.006	0.006	0.006
Total Settlement (m / ft)			0.006	0.006	0.006	0.006	0.006	0.006	0.006	0.006	0.006
Elastic or Plastic (E/P)											
1-D			P	P	P	P	P	P	P	P	P
Settlement of Layer 12 (m / ft)			0.006	0.006	0.006	0.006	0.006	0.006	0.006	0.006	0.006
	Layer No.	13YR3-6									
	Initial Stress Reference Layer (top of layer)		8	8	8	8	8	8	8	8	8
	Final Stress Reference Layer (top of layer)		1	1	1	1	1	1	1	1	1
	Midpoint Elevation, (m / ft)		450.58	450.58	450.58	450.58	450.58	450.58	450.58	450.58	450.58
	Initial Effective Stress, σ'_i (kPa /psf)		811	811	811	811	811	811	811	811	811
	Final Effective Stress, σ'_f (kPa/psf)		811	811	811	811	811	811	811	811	811
Elastic Method											
Modulus, E (kPa/psf)=			Strain								
			Settlement (m / ft)								
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)			MW	MW	MW	MW	MW	MW	MW	MW	MW
OCR Manual Input Value			1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)			811	811	811	811	811	811	811	811	811
Modified Primary Compression Index, C_{cc}			0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291
Modified Recompression Index, C_{re}			0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005
Modified Secondary Compression Index, $C_{\alpha\alpha}$			0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%
ratio of t2 / t1			4	4	4	4	4	4	4	4	4
Settlements											
Primary Settlement, (m / ft)			0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Secondary Settlement (m / ft)			0.006	0.006	0.006	0.006	0.006	0.006	0.006	0.006	0.006
Total Settlement (m / ft)			0.006	0.006	0.006	0.006	0.006	0.006	0.006	0.006	0.006
Elastic or Plastic (E/P)											
1-D			P	P	P	P	P	P	P	P	P
Settlement of Layer 13 (m / ft)			0.006	0.006	0.006	0.006	0.006	0.006	0.006	0.006	0.006

Written by: **Yiwen Cao** Date: **12/17/2009** Reviewed by: **R. Kulasingam/Jay Beech** Date: **12/17/2009**

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

Layer No. 14 YR3-7											
Initial Stress Reference Layer (top of layer)	8	8	8	8	8	8	8	8	8	8	8
Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1	1
Midpoint Elevation, (m / ft)	448.86	448.86	448.86	448.86	448.86	448.86	448.86	448.86	448.86	448.86	448.86
Initial Effective Stress, σ'_i (kPa / psf)	959	959	959	959	959	959	958	958	958	958	958
Final Effective Stress, σ'_f (kPa/psf)	959	959	959	959	959	959	959	959	959	959	959
Elastic Method											
Modulus, E (kPa/psf)=											
Strain											
Settlement (m / ft)											
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)	MW	MW	MW	MW	MW	MW	MW	MW	MW	MW	MW
OCR Manual Input Value	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)	959	959	959	959	959	959	958	958	958	958	958
Modified Primary Compression Index, C_{ce}	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291
Modified Recompression Index, C_{re}	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005
Modified Secondary Compression Index, $C_{\alpha\alpha}$	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%
ratio of t_2 / t_1	4	4	4	4	4	4	4	4	4	4	4
Settlements											
Primary Settlement, (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Secondary Settlement (m / ft)	0.006	0.006	0.006	0.006	0.006	0.006	0.006	0.006	0.006	0.006	0.006
Total Settlement (m / ft)	0.006	0.006	0.006	0.006	0.006	0.006	0.006	0.006	0.006	0.006	0.006
Elastic or Plastic (E/P)	P	P	P	P	P	P	P	P	P	P	P
Settlement of Layer 14 (m / ft)	1-D 0.006	1-D 0.006	1-D 0.006	1-D 0.006	1-D 0.006	1-D 0.006	1-D 0.006	1-D 0.006	1-D 0.006	1-D 0.006	1-D 0.006
Layer No. 15 YR2-1											
Initial Stress Reference Layer (top of layer)	15	15	15	15	15	15	15	15	15	15	15
Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1	1
Midpoint Elevation, (m / ft)	448.00	448.00	448.00	448.00	448.00	448.00	448.00	448.00	448.00	448.00	448.00
Initial Effective Stress, σ'_i (kPa / psf)	0	0	0	0	0	0	0	0	0	0	0
Final Effective Stress, σ'_f (kPa/psf)	1,032	1,033	1,033	1,033	1,033	1,033	1,033	1,033	1,033	1,033	1,033
Elastic Method											
Modulus, E (kPa/psf)=											
Strain											
Settlement (m / ft)											
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)	MW	MW	MW	MW	MW	MW	MW	MW	MW	MW	MW
OCR Manual Input Value	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)	0	0	0	0	0	0	0	0	0	0	0
Modified Primary Compression Index, C_{ce}	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291
Modified Recompression Index, C_{re}	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014
Modified Secondary Compression Index, $C_{\alpha\alpha}$	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%
ratio of t_2 / t_1	6	6	6	6	6	6	6	6	6	6	6
Settlements											
Primary Settlement, (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Secondary Settlement (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Total Settlement (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Elastic or Plastic (E/P)	P	P	P	P	P	P	P	P	P	P	P
Settlement of Layer 15 (m / ft)	1-D 0.000	1-D 0.000	1-D 0.000	1-D 0.000	1-D 0.000	1-D 0.000	1-D 0.000	1-D 0.000	1-D 0.000	1-D 0.000	1-D 0.000
Layer No. 16 YR2-2											
Initial Stress Reference Layer (top of layer)	15	15	15	15	15	15	15	15	15	15	15
Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1	1
Midpoint Elevation, (m / ft)	448.00	448.00	448.00	448.00	448.00	448.00	448.00	448.00	448.00	448.00	448.00
Initial Effective Stress, σ'_i (kPa / psf)	0	0	0	0	0	0	0	0	0	0	0
Final Effective Stress, σ'_f (kPa/psf)	1,032	1,033	1,033	1,033	1,033	1,033	1,033	1,033	1,033	1,033	1,033
Elastic Method											
Modulus, E (kPa/psf)=											
Strain											
Settlement (m / ft)											
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)	MW	MW	MW	MW	MW	MW	MW	MW	MW	MW	MW
OCR Manual Input Value	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)	0	0	0	0	0	0	0	0	0	0	0
Modified Primary Compression Index, C_{ce}	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291
Modified Recompression Index, C_{re}	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005
Modified Secondary Compression Index, $C_{\alpha\alpha}$	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%
ratio of t_2 / t_1	6	6	6	6	6	6	6	6	6	6	6
Settlements											
Primary Settlement, (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Secondary Settlement (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Total Settlement (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Elastic or Plastic (E/P)	P	P	P	P	P	P	P	P	P	P	P
Settlement of Layer 16 (m / ft)	1-D 0.000	1-D 0.000	1-D 0.000	1-D 0.000	1-D 0.000	1-D 0.000	1-D 0.000	1-D 0.000	1-D 0.000	1-D 0.000	1-D 0.000

Written by: **Yiwen Cao** Date: **12/17/2009** Reviewed by: **R. Kulasingam/Jay Beech** Date: **12/17/2009**

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

Layer No.	17	17	17	17	17	17	17	17	17	17	17
Initial Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1	1
Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1	1
Midpoint Elevation, (m / ft)	448.00	448.00	448.00	448.00	448.00	448.00	448.00	448.00	448.00	448.00	448.00
Initial Effective Stress, σ'_i (kPa / psf)	0	0	0	0	0	0	0	0	0	0	0
Final Effective Stress, σ'_f (kPa/psf)	1,032	1,033	1,033	1,033	1,033	1,033	1,033	1,033	1,033	1,033	1,033
Elastic Method											
Modulus, E (kPa/psf)=											
Strain											
Settlement (m / ft)											
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)	MW	MW	MW	MW	MW	MW	MW	MW	MW	MW	MW
OCR Manual Input Value	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)	0	0	0	0	0	0	0	0	0	0	0
Modified Primary Compression Index, C_{ce}	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291
Modified Recompression Index, C_{re}	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005
Modified Secondary Compression Index, $C_{\alpha\alpha}$	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%
ratio of t_2 / t_1	6	6	6	6	6	6	6	6	6	6	6
Settlements											
Primary Settlement, (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Secondary Settlement (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Total Settlement (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Elastic or Plastic (E/P)											
1-D	P	P	P	P	P	P	P	P	P	P	P
Settlement of Layer 17 (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Layer No.	18	18	18	18	18	18	18	18	18	18	18
Initial Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1	1
Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1	1
Midpoint Elevation, (m / ft)	448.00	448.00	448.00	448.00	448.00	448.00	448.00	448.00	448.00	448.00	448.00
Initial Effective Stress, σ'_i (kPa / psf)	0	0	0	0	0	0	0	0	0	0	0
Final Effective Stress, σ'_f (kPa/psf)	1,032	1,033	1,033	1,033	1,033	1,033	1,033	1,033	1,033	1,033	1,033
Elastic Method											
Modulus, E (kPa/psf)=											
Strain											
Settlement (m / ft)											
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)	MW	MW	MW	MW	MW	MW	MW	MW	MW	MW	MW
OCR Manual Input Value	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)	0	0	0	0	0	0	0	0	0	0	0
Modified Primary Compression Index, C_{ce}	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291
Modified Recompression Index, C_{re}	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005
Modified Secondary Compression Index, $C_{\alpha\alpha}$	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%
ratio of t_2 / t_1	6	6	6	6	6	6	6	6	6	6	6
Settlements											
Primary Settlement, (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Secondary Settlement (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Total Settlement (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Elastic or Plastic (E/P)											
1-D	P	P	P	P	P	P	P	P	P	P	P
Settlement of Layer 18 (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Layer No.	19	19	19	19	19	19	19	19	19	19	19
Initial Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1	1
Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1	1
Midpoint Elevation, (m / ft)	448.00	448.00	448.00	448.00	448.00	448.00	448.00	448.00	448.00	448.00	448.00
Initial Effective Stress, σ'_i (kPa / psf)	0	0	0	0	0	0	0	0	0	0	0
Final Effective Stress, σ'_f (kPa/psf)	1,032	1,033	1,033	1,033	1,033	1,033	1,033	1,033	1,033	1,033	1,033
Elastic Method											
Modulus, E (kPa/psf)=											
Strain											
Settlement (m / ft)											
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)	MW	MW	MW	MW	MW	MW	MW	MW	MW	MW	MW
OCR Manual Input Value	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)	0	0	0	0	0	0	0	0	0	0	0
Modified Primary Compression Index, C_{ce}	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291
Modified Recompression Index, C_{re}	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005
Modified Secondary Compression Index, $C_{\alpha\alpha}$	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%
ratio of t_2 / t_1	6	6	6	6	6	6	6	6	6	6	6
Settlements											
Primary Settlement, (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Secondary Settlement (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Total Settlement (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Elastic or Plastic (E/P)											
1-D	P	P	P	P	P	P	P	P	P	P	P
Settlement of Layer 19 (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000

Written by: **Yiwen Cao** Date: **12/17/2009** Reviewed by: **R. Kulasingam/Jay Beech** Date: **12/17/2009**

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

	Layer No.	20	YR2-6								
	Initial Stress Reference Layer (top of layer)				15	15	15	15	15	15	15
	Final Stress Reference Layer (top of layer)				1	1	1	1	1	1	1
	Midpoint Elevation, (m / ft)				448.00	448.00	448.00	448.00	448.00	448.00	448.00
	Initial Effective Stress, σ'_i (kPa /psf)				0	0	0	0	0	0	0
Final Effective Stress, σ'_f (kPa/psf)					1,032	1,033	1,033	1,033	1,033	1,033	1,033
Elastic Method											
Modulus, E (kPa/psf)=				Strain							
				Settlement (m / ft)							
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)					MW	MW	MW	MW	MW	MW	MW
OCR Manual Input Value					1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)					0	0	0	0	0	0	0
Modified Primary Compression Index, C_{cc}					0.291	0.291	0.291	0.291	0.291	0.291	0.291
Modified Recompression Index, C_{re}					0.005	0.005	0.005	0.005	0.005	0.005	0.005
Modified Secondary Compression Index, $C_{\alpha\alpha}$					0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%
ratio of t2 / t1					6	6	6	6	6	6	6
Settlements											
Primary Settlement, (m / ft)					0.000	0.000	0.000	0.000	0.000	0.000	0.000
Secondary Settlement (m / ft)					0.000	0.000	0.000	0.000	0.000	0.000	0.000
Total Settlement (m / ft)					0.000	0.000	0.000	0.000	0.000	0.000	0.000
Elastic or Plastic (E/P)					P	P	P	P	P	P	P
					1-D	1-D	1-D	1-D	1-D	1-D	1-D
Settlement of Layer 20 (m / ft)					0.000	0.000	0.000	0.000	0.000	0.000	0.000
	Layer No.	21	YR2-7								
	Initial Stress Reference Layer (top of layer)				15	15	15	15	15	15	15
	Final Stress Reference Layer (top of layer)				1	1	1	1	1	1	1
	Midpoint Elevation, (m / ft)				448.00	448.00	448.00	448.00	448.00	448.00	448.00
	Initial Effective Stress, σ'_i (kPa /psf)				0	0	0	0	0	0	0
Final Effective Stress, σ'_f (kPa/psf)					1,032	1,033	1,033	1,033	1,033	1,033	1,033
Elastic Method											
Modulus, E (kPa/psf)=				Strain							
				Settlement (m / ft)							
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)					MW	MW	MW	MW	MW	MW	MW
OCR Manual Input Value					1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)					0	0	0	0	0	0	0
Modified Primary Compression Index, C_{cc}					0.291	0.291	0.291	0.291	0.291	0.291	0.291
Modified Recompression Index, C_{re}					0.005	0.005	0.005	0.005	0.005	0.005	0.005
Modified Secondary Compression Index, $C_{\alpha\alpha}$					0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%
ratio of t2 / t1					6	6	6	6	6	6	6
Settlements											
Primary Settlement, (m / ft)					0.000	0.000	0.000	0.000	0.000	0.000	0.000
Secondary Settlement (m / ft)					0.000	0.000	0.000	0.000	0.000	0.000	0.000
Total Settlement (m / ft)					0.000	0.000	0.000	0.000	0.000	0.000	0.000
Elastic or Plastic (E/P)					P	P	P	P	P	P	P
					1-D	1-D	1-D	1-D	1-D	1-D	1-D
Settlement of Layer 21 (m / ft)					0.000	0.000	0.000	0.000	0.000	0.000	0.000
	Layer No.	22	YR1-1								
	Initial Stress Reference Layer (top of layer)				22	22	22	22	22	22	22
	Final Stress Reference Layer (top of layer)				1	1	1	1	1	1	1
	Midpoint Elevation, (m / ft)				446.50	446.50	446.50	446.50	446.50	446.50	446.50
	Initial Effective Stress, σ'_i (kPa /psf)				129	129	129	129	129	129	129
Final Effective Stress, σ'_f (kPa/psf)					1,161	1,161	1,161	1,161	1,162	1,162	1,162
Elastic Method											
Modulus, E (kPa/psf)=				Strain							
				Settlement (m / ft)							
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)					MW	MW	MW	MW	MW	MW	MW
OCR Manual Input Value					1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)					129	129	129	129	129	129	129
Modified Primary Compression Index, C_{cc}					0.291	0.291	0.291	0.291	0.291	0.291	0.291
Modified Recompression Index, C_{re}					0.005	0.005	0.005	0.005	0.005	0.005	0.005
Modified Secondary Compression Index, $C_{\alpha\alpha}$					0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%
ratio of t2 / t1					8	8	8	8	8	8	8
Settlements											
Primary Settlement, (m / ft)					0.834	0.834	0.834	0.834	0.834	0.834	0.834
Secondary Settlement (m / ft)					0.016	0.016	0.016	0.016	0.016	0.016	0.016
Total Settlement (m / ft)					0.850	0.850	0.850	0.850	0.850	0.850	0.850
Elastic or Plastic (E/P)					P	P	P	P	P	P	P
					1-D	1-D	1-D	1-D	1-D	1-D	1-D
Settlement of Layer 22 (m / ft)					0.850	0.850	0.850	0.850	0.850	0.850	0.850

Written by: **Yiwen Cao** Date: **12/17/2009** Reviewed by: **R. Kulasingam/Jay Beech** Date: **12/17/2009**

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

Layer No. 23 YR1-2											
Initial Stress Reference Layer (top of layer)	22	22	22	22	22	22	22	22	22	22	22
Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1	1
Midpoint Elevation, (m / ft)	443.51	443.51	443.51	443.51	443.51	443.51	443.51	443.51	443.50	443.50	443.50
Initial Effective Stress, σ'_i (kPa / psf)	387	387	387	387	387	387	387	387	387	387	387
Final Effective Stress, σ'_f (kPa/psf)	1,419	1,419	1,419	1,419	1,419	1,419	1,419	1,419	1,419	1,419	1,419
Elastic Method											
Modulus, E (kPa/psf)=											
Strain											
Settlement (m / ft)											
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)	MW	MW	MW	MW	MW	MW	MW	MW	MW	MW	MW
OCR Manual Input Value	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)	387	387	387	387	387	387	387	387	387	387	387
Modified Primary Compression Index, C_{cc}	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291
Modified Recompression Index, C_{re}	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005
Modified Secondary Compression Index, $C_{\alpha\alpha}$	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%
ratio of t_2 / t_1	8	8	8	8	8	8	8	8	8	8	8
Settlements											
Primary Settlement, (m / ft)	0.493	0.493	0.493	0.493	0.493	0.493	0.493	0.493	0.493	0.493	0.493
Secondary Settlement (m / ft)	0.016	0.016	0.016	0.016	0.016	0.016	0.016	0.016	0.016	0.016	0.016
Total Settlement (m / ft)	0.510	0.510	0.510	0.510	0.510	0.510	0.510	0.510	0.510	0.510	0.510
Elastic or Plastic (E/P)	P	P	P	P	P	P	P	P	P	P	P
Settlement of Layer 23 (m / ft)	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D
	0.510	0.510	0.510	0.510	0.510	0.510	0.510	0.510	0.510	0.510	0.510
Layer No. 24 YR1-3											
Initial Stress Reference Layer (top of layer)	22	22	22	22	22	22	22	22	22	22	22
Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1	1
Midpoint Elevation, (m / ft)	440.51	440.51	440.51	440.51	440.51	440.51	440.51	440.51	440.51	440.51	440.51
Initial Effective Stress, σ'_i (kPa / psf)	645	645	645	645	645	645	645	645	645	645	645
Final Effective Stress, σ'_f (kPa/psf)	1,677	1,677	1,677	1,677	1,677	1,677	1,677	1,677	1,677	1,677	1,677
Elastic Method											
Modulus, E (kPa/psf)=											
Strain											
Settlement (m / ft)											
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)	MW	MW	MW	MW	MW	MW	MW	MW	MW	MW	MW
OCR Manual Input Value	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)	645	645	645	645	645	645	645	645	645	645	645
Modified Primary Compression Index, C_{cc}	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291
Modified Recompression Index, C_{re}	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005
Modified Secondary Compression Index, $C_{\alpha\alpha}$	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%
ratio of t_2 / t_1	8	8	8	8	8	8	8	8	8	8	8
Settlements											
Primary Settlement, (m / ft)	0.363	0.363	0.363	0.363	0.363	0.363	0.363	0.363	0.363	0.363	0.363
Secondary Settlement (m / ft)	0.016	0.016	0.016	0.016	0.016	0.016	0.016	0.016	0.016	0.016	0.016
Total Settlement (m / ft)	0.379	0.379	0.379	0.379	0.379	0.379	0.379	0.379	0.379	0.379	0.379
Elastic or Plastic (E/P)	P	P	P	P	P	P	P	P	P	P	P
Settlement of Layer 24 (m / ft)	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D
	0.379	0.379	0.379	0.379	0.379	0.379	0.379	0.379	0.379	0.379	0.379
Layer No. 25 YR1-4											
Initial Stress Reference Layer (top of layer)	22	22	22	22	22	22	22	22	22	22	22
Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1	1
Midpoint Elevation, (m / ft)	437.51	437.51	437.51	437.51	437.51	437.51	437.51	437.51	437.51	437.51	437.51
Initial Effective Stress, σ'_i (kPa / psf)	902.71	902.70	902.70	902.69	902.69	902.68	902.67	902.67	902.66	902.66	902.66
Final Effective Stress, σ'_f (kPa/psf)	1,935.21	1,935.21	1,935.21	1,935.22	1,935.22	1,935.23	1,935.24	1,935.24	1,935.25	1,935.25	1,935.25
Elastic Method											
Modulus, E (kPa/psf)=											
Strain											
Settlement (m / ft)											
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)	MW	MW	MW	MW	MW	MW	MW	MW	MW	MW	MW
OCR Manual Input Value	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)	903	903	903	903	903	903	903	903	903	903	903
Modified Primary Compression Index, C_{cc}	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291
Modified Recompression Index, C_{re}	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005
Modified Secondary Compression Index, $C_{\alpha\alpha}$	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%
ratio of t_2 / t_1	8	8	8	8	8	8	8	8	8	8	8
Settlements											
Primary Settlement, (m / ft)	0.289	0.289	0.289	0.289	0.289	0.289	0.289	0.289	0.289	0.289	0.289
Secondary Settlement (m / ft)	0.016	0.016	0.016	0.016	0.016	0.016	0.016	0.016	0.016	0.016	0.016
Total Settlement (m / ft)	0.306	0.306	0.306	0.306	0.306	0.306	0.306	0.306	0.306	0.306	0.306
Elastic or Plastic (E/P)	P	P	P	P	P	P	P	P	P	P	P
Settlement of Layer 25 (m / ft)	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D
	0.306	0.306	0.306	0.306	0.306	0.306	0.306	0.306	0.306	0.306	0.306

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: Honeywell Project: Onondaga Lake SCA Final Design Project/ Proposal No.: GJ4299 Task No.: 04

Layer No.	26	YR1-5									
Initial Stress Reference Layer (top of layer)	22	22	22	22	22	22	22	22	22	22	22
Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1	1
Midpoint Elevation, (m / ft)	434.51	434.51	434.51	434.51	434.51	434.51	434.51	434.51	434.51	434.51	434.51
Initial Effective Stress, σ'_v (kPa / psf)	1,160.63	1,160.61	1,160.61	1,160.60	1,160.60	1,160.59	1,160.57	1,160.57	1,160.56	1,160.56	1,160.56
Final Effective Stress, σ'_f (kPa/psf)	2,193.12	2,193.13	2,193.13	2,193.13	2,193.13	2,193.14	2,193.14	2,193.14	2,193.15	2,193.15	2,193.15
Elastic Method											
Modulus, E (kPa/psf)=											
Strain											
Settlement (m / ft)											
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)	MW	MW	MW	MW	MW	MW	MW	MW	MW	MW	MW
OCR Manual Input Value	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)	1,161	1,161	1,161	1,161	1,161	1,161	1,161	1,161	1,161	1,161	1,161
Modified Primary Compression Index, C_{ce}	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291
Modified Recompression Index, C_{re}	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005
Modified Secondary Compression Index, $C_{\alpha\alpha}$	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%
ratio of t_2 / t_1	8	8	8	8	8	8	8	8	8	8	8
Settlements											
Primary Settlement, (m / ft)	0.241	0.241	0.241	0.241	0.241	0.241	0.241	0.241	0.241	0.241	0.241
Secondary Settlement (m / ft)	0.016	0.016	0.016	0.016	0.016	0.016	0.016	0.016	0.016	0.016	0.016
Total Settlement (m / ft)	0.258	0.258	0.258	0.258	0.258	0.258	0.258	0.258	0.258	0.258	0.258
Elastic or Plastic (E/P)											
Settlement of Layer 26 (m / ft)	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D
	0.258	0.258	0.258	0.258	0.258	0.258	0.258	0.258	0.258	0.258	0.258
Layer No.	27	YR1-6									
Initial Stress Reference Layer (top of layer)	22	22	22	22	22	22	22	22	22	22	22
Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1	1
Midpoint Elevation, (m / ft)	431.51	431.51	431.51	431.51	431.51	431.51	431.51	431.51	431.51	431.51	431.51
Initial Effective Stress, σ'_v (kPa / psf)	1,418.55	1,418.53	1,418.53	1,418.51	1,418.51	1,418.49	1,418.48	1,418.48	1,418.46	1,418.46	1,418.46
Final Effective Stress, σ'_f (kPa/psf)	2,451.04	2,451.04	2,451.04	2,451.04	2,451.04	2,451.05	2,451.05	2,451.05	2,451.05	2,451.05	2,451.05
Elastic Method											
Modulus, E (kPa/psf)=											
Strain											
Settlement (m / ft)											
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)	MW	MW	MW	MW	MW	MW	MW	MW	MW	MW	MW
OCR Manual Input Value	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)	1,419	1,419	1,419	1,419	1,419	1,418	1,418	1,418	1,418	1,418	1,418
Modified Primary Compression Index, C_{ce}	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291	0.291
Modified Recompression Index, C_{re}	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005
Modified Secondary Compression Index, $C_{\alpha\alpha}$	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%	0.60%
ratio of t_2 / t_1	8	8	8	8	8	8	8	8	8	8	8
Settlements											
Primary Settlement, (m / ft)	0.208	0.208	0.208	0.208	0.208	0.208	0.208	0.208	0.208	0.208	0.208
Secondary Settlement (m / ft)	0.016	0.016	0.016	0.016	0.016	0.016	0.016	0.016	0.016	0.016	0.016
Total Settlement (m / ft)	0.224	0.224	0.224	0.224	0.224	0.224	0.224	0.224	0.224	0.224	0.224
Elastic or Plastic (E/P)											
Settlement of Layer 27 (m / ft)	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D
	0.224	0.224	0.224	0.224	0.224	0.224	0.224	0.224	0.224	0.224	0.224

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: Honeywell Project: Onondaga Lake SCA Final Design Project/ Proposal No.: GJ4299 Task No.: 04

LAYER SETTLEMENT	Layer No.	Material										
	1	Null Layer										
	2	YR4-1	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	3	YR4-2	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	4	YR4-3	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	5	YR4-4	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	6	YR4-5	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	7	YR4-6	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	8	YR3-1	0.007	0.007	0.007	0.007	0.007	0.007	0.007	0.007	0.007	0.007
	9	YR3-2	0.006	0.006	0.006	0.006	0.006	0.007	0.007	0.007	0.007	0.007
	10	YR3-3	0.006	0.006	0.006	0.006	0.006	0.006	0.006	0.006	0.006	0.006
	11	YR3-4	0.006	0.006	0.006	0.006	0.006	0.006	0.006	0.006	0.006	0.006
	12	YR3-5	0.006	0.006	0.006	0.006	0.006	0.006	0.006	0.006	0.006	0.006
	13	YR3-6	0.006	0.006	0.006	0.006	0.006	0.006	0.006	0.006	0.006	0.006
	14	YR3-7	0.006	0.006	0.006	0.006	0.006	0.006	0.006	0.006	0.006	0.006
	15	YR2-1	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	16	YR2-2	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	17	YR2-3	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	18	YR2-4	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	19	YR2-5	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	20	YR2-6	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	21	YR2-7	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	22	YR1-1	0.850	0.850	0.850	0.850	0.850	0.850	0.850	0.850	0.850	0.850
	23	YR1-2	0.510	0.510	0.510	0.510	0.510	0.510	0.510	0.510	0.510	0.510
	24	YR1-3	0.379	0.379	0.379	0.379	0.379	0.379	0.379	0.379	0.379	0.379
	25	YR1-4	0.306	0.306	0.306	0.306	0.306	0.306	0.306	0.306	0.306	0.306
	26	YR1-5	0.258	0.258	0.258	0.258	0.258	0.258	0.258	0.258	0.258	0.258
	27	YR1-6	0.224	0.224	0.224	0.224	0.224	0.224	0.224	0.224	0.224	0.224
	28	Additional Foundation Settlement	9.676	9.679	9.585	8.494	8.556	8.613	8.515	8.515	9.551	9.632
	29											
	30											
	TOTAL SETTLEMENT		12.25	12.25	12.16	11.07	11.13	11.18	11.09	11.09	12.12	12.20
POST-SETTLEMENT ELEVATION (M/FT)	Line 1	Top of Year 4 Dredge	447.76	447.76	447.85	448.94	448.88	448.83	448.92	448.92	447.89	447.81
	Line 2	Top of Year 4 Dredge	447.76	447.76	447.85	448.94	448.88	448.83	448.92	448.92	447.89	447.81
	Line 3		447.76	447.76	447.85	448.94	448.88	448.83	448.92	448.92	447.89	447.81
	Line 4		447.76	447.76	447.85	448.94	448.88	448.82	448.92	448.92	447.89	447.80
	Line 5		447.76	447.76	447.85	448.94	448.88	448.82	448.92	448.92	447.89	447.80
	Line 6		447.76	447.76	447.85	448.94	448.88	448.82	448.92	448.92	447.88	447.80
	Line 7		447.76	447.76	447.85	448.94	448.88	448.82	448.92	448.92	447.88	447.80
	Line 8	Top of Year 3 Dredge	447.76	447.76	447.85	448.94	448.88	448.82	448.92	448.92	447.88	447.80
	Line 9		446.05	446.05	446.14	447.23	447.17	447.11	447.21	447.21	446.18	446.09
	Line 10		444.34	444.34	444.43	445.53	445.46	445.41	445.50	445.50	444.47	444.39
	Line 11		442.64	442.63	442.73	443.82	443.76	443.70	443.80	443.80	442.76	442.68
	Line 12		440.93	440.92	441.02	442.11	442.05	441.99	442.09	442.09	441.05	440.97
	Line 13		439.22	439.22	439.31	440.40	440.34	440.28	440.38	440.38	439.34	439.26
	Line 14		437.51	437.51	437.60	438.69	438.63	438.57	438.67	438.67	437.63	437.55
	Line 15	Top of Year 2 Dredge	435.80	435.80	435.89	436.98	436.92	436.86	436.96	436.96	435.93	435.84
	Line 16		435.80	435.80	435.89	436.98	436.92	436.86	436.96	436.96	435.93	435.84
	Line 17		435.80	435.80	435.89	436.98	436.92	436.86	436.96	436.96	435.93	435.84
	Line 18		435.80	435.80	435.89	436.98	436.92	436.86	436.96	436.96	435.93	435.84
	Line 19		435.80	435.80	435.89	436.98	436.92	436.86	436.96	436.96	435.93	435.84
	Line 20		435.80	435.80	435.89	436.98	436.92	436.86	436.96	436.96	435.93	435.84
	Line 21		435.80	435.80	435.89	436.98	436.92	436.86	436.96	436.96	435.93	435.84
	Line 22	Top of Year 1 Dredge	435.80	435.80	435.89	436.98	436.92	436.86	436.96	436.96	435.93	435.84
	Line 23		433.65	433.65	433.74	434.83	434.77	434.72	434.81	434.81	433.78	433.70
	Line 24		431.16	431.16	431.25	432.35	432.28	432.23	432.32	432.32	431.29	431.21
	Line 25		428.54	428.54	428.63	429.73	429.66	429.61	429.70	429.70	428.67	428.59
	Line 26		425.85	425.85	425.94	427.03	426.97	426.91	427.01	427.01	425.97	425.89
	Line 27		423.11	423.11	423.20	424.29	424.23	424.17	424.27	424.27	423.23	423.15
	Line 28	Top of Gravel(Top of Incompressible)	420.33	420.33	420.42	421.52	421.45	421.40	421.50	421.50	420.46	420.38
	Line 29											
	Line 30											
	Line 31											

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

Attachment 8

CASE 7: Settlement Analysis for Top of LPSL 30 Years
after Closure (i.e., End of Year 35)
(Cross Section A, Points 26 to 35)

Written by: **Yiwen Cao** Date: **12/17/2009** Reviewed by: **R. Kulasingam/Jay Beech** Date: **12/17/2009**

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

Settlement Prediction Model											
Programmer: Yiwen Cao, GeoSyntec Consultants											
Version Control V 1.002 11.14.2007											
Project: Onondaga Lake SCA Final											
Notes:											
Unit: ft / psf											
Average Compaction Effort = 1440.00 kPa or psf											
Consider Compaction Effort = N yes or no											
Point #											
Distance (meter or ft)	26	27	28	29	30	31	32	33	34	35	
	349.52	371.48	371.77	391.48	391.77	412.70	431.77	432.06	451.77	452.06	
ELEVATION (M/FT)	Line 1	Top of Final Cover	451.00	451.06	451.06	451.10	451.10	451.06	451.03	451.03	451.01
	Line 2	Top of Dredge	447.76	447.76	447.85	448.94	448.88	448.83	448.92	448.92	447.89
	Line 3	Top of Gravel	420.33	420.33	420.42	421.52	421.45	421.40	421.50	421.50	420.38
	Line 4	Top of Clay	414.01	413.82	413.91	407.13	406.94	406.89	406.99	407.11	413.95
	Line 5	Top of Dike	411.77	412.14	412.11	405.36	405.29	405.33	405.42	405.42	412.27
	Line 6	Top of Subgrade	411.77	412.14	412.11	405.36	405.29	405.33	405.42	405.42	412.27
	Line 7		409.61	409.96	409.93	403.57	403.51	403.55	403.63	403.63	410.08
	Line 8		407.44	407.77	407.74	401.79	401.73	401.76	401.84	401.84	407.89
	Line 9		405.28	405.59	405.56	400.00	399.94	399.98	400.05	400.05	405.69
	Line 10		403.12	403.40	403.38	398.22	398.16	398.19	398.26	398.26	403.50
	Line 11		400.96	401.22	401.20	396.43	396.38	396.41	396.47	396.47	401.31
	Line 12		398.79	399.03	399.01	394.64	394.60	394.63	394.68	394.68	399.12
	Line 13		396.63	396.85	396.83	392.86	392.82	392.84	392.89	392.89	396.92
	Line 14		394.47	394.66	394.65	391.07	391.04	391.06	391.10	391.10	394.73
	Line 15		392.30	392.48	392.46	389.29	389.25	389.27	389.32	389.32	392.54
	Line 16		390.14	390.29	390.28	387.50	387.47	387.49	387.53	387.53	390.35
	Line 17		387.98	388.11	388.10	385.72	385.69	385.70	385.74	385.74	388.15
	Line 18		385.81	385.92	385.91	383.93	383.91	383.92	383.95	383.95	385.97
	Line 19		383.65	383.74	383.73	382.14	382.13	382.14	382.16	382.16	383.77
	Line 20		381.49	381.55	381.55	380.36	380.35	380.35	380.37	380.37	381.58
	Line 21		379.33	379.37	379.37	378.57	378.56	378.57	378.58	378.58	379.39
	Line 22		377.16	377.18	377.18	376.79	376.78	376.78	376.79	376.79	377.19
	Line 23	Bottom of Zone2 Above GW	375.00	375.00	375.00	375.00	375.00	375.00	375.00	375.00	375.00
	Line 24		375.00	375.00	375.00	375.00	375.00	375.00	375.00	375.00	375.00
	Line 25	Bottom of Zone 3 Above GW	375.00	375.00	375.00	375.00	375.00	375.00	375.00	375.00	375.00
	Line 26		370.00	370.00	370.00	370.00	370.00	370.00	370.00	370.00	370.00
	Line 27	Bottom of Zone 2 Below GW	365.00	365.00	365.00	365.00	365.00	365.00	365.00	365.00	365.00
	Line 28	Top of Incompressible Layer	365.00	365.00	365.00	365.00	365.00	365.00	365.00	365.00	365.00
	Line 29	GND for sigma p	421.51	421.84	421.84	421.86	421.86	421.91	421.96	421.96	422.00
	Line 30	GW	375.00	375.00	375.00	375.00	375.00	375.00	375.00	375.00	375.00
	Line 31	ROCK	365.00	365.00	365.00	365.00	365.00	365.00	365.00	365.00	365.00
LAYER THICKNESS (M/FT)	Layer No.	From To	Material								
	1	1	Cover	3.24	3.30	3.21	2.16	2.22	2.23	2.11	3.12
	2	2	Dredge	27.43	27.43	27.43	27.42	27.43	27.43	27.42	27.43
	3	3	Gravel	6.32	6.51	6.51	14.39	14.51	14.51	14.39	6.51
	4	4	Clay	2.24	1.68	1.80	1.77	1.65	1.56	1.57	1.68
	5	5	Dike	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6	6	Zone2-Above-GW-1	2.16	2.18	2.18	1.79	1.78	1.78	1.79	2.19
	7	7	Zone2-Above-GW-2	2.16	2.18	2.18	1.79	1.78	1.78	1.79	2.19
	8	8	Zone2-Above-GW-3	2.16	2.18	2.18	1.79	1.78	1.78	1.79	2.19
	9	9	Zone2-Above-GW-4	2.16	2.18	2.18	1.79	1.78	1.78	1.79	2.19
	10	10	Zone2-Above-GW-5	2.16	2.18	2.18	1.79	1.78	1.78	1.79	2.19
	11	11	Zone2-Above-GW-6	2.16	2.18	2.18	1.79	1.78	1.78	1.79	2.19
	12	12	Zone2-Above-GW-7	2.16	2.18	2.18	1.79	1.78	1.78	1.79	2.19
	13	13	Zone2-Above-GW-8	2.16	2.18	2.18	1.79	1.78	1.78	1.79	2.19
	14	14	Zone2-Above-GW-9	2.16	2.18	2.18	1.79	1.78	1.78	1.79	2.19
	15	15	Zone2-Above-GW-10	2.16	2.18	2.18	1.79	1.78	1.78	1.79	2.19
	16	16	Zone2-Above-GW-11	2.16	2.18	2.18	1.79	1.78	1.78	1.79	2.19
	17	17	Zone2-Above-GW-12	2.16	2.18	2.18	1.79	1.78	1.78	1.79	2.19
	18	18	Zone2-Above-GW-13	2.16	2.18	2.18	1.79	1.78	1.78	1.79	2.19
	19	19	Zone2-Above-GW-14	2.16	2.18	2.18	1.79	1.78	1.78	1.79	2.19
	20	20	Zone2-Above-GW-15	2.16	2.18	2.18	1.79	1.78	1.78	1.79	2.19
	21	21	Zone2-Above-GW-16	2.16	2.18	2.18	1.79	1.78	1.78	1.79	2.19
	22	22	Zone2-Above-GW-17	2.16	2.18	2.18	1.79	1.78	1.78	1.79	2.19
	23	23	Zone3-Above-GW-1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	24	24	Zone3-Above-GW-2	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	25	25	Zone2-Below-GW-18	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00
	26	26	Zone2-Below-GW-19	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00
	27	27	Zone3-Below-GW-3	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	28										
	29	29	Soil Above GW	46.51	46.84	46.84	46.86	46.86	46.91	46.96	47.00
	30	30	Soil Below GW	10.00	10.00	10.00	10.00	10.00	10.00	10.00	10.00
	Thickness Check										
		From Line To Line	SUM	86.00	86.06	86.06	86.10	86.10	86.06	86.03	86.01
		1 28	Thickness =	86.00	86.06	86.06	86.10	86.10	86.06	86.03	86.01
	Thickness Check			OK	OK	OK	OK	OK	OK	OK	OK

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: Honeywell Project: Onondaga Lake SCA Final Design Project/ Proposal No.: GJ4299 Task No.: 04

UNIT WEIGHT	Layer No.	Material										
	1	Cover	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0
	2	Dredge	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
	3	Gravel	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0
	4	Clay	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0
	5	Dike	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0
	6	Zone2-Above-GW-1	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	7	Zone2-Above-GW-2	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	8	Zone2-Above-GW-3	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	9	Zone2-Above-GW-4	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	10	Zone2-Above-GW-5	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	11	Zone2-Above-GW-6	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	12	Zone2-Above-GW-7	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	13	Zone2-Above-GW-8	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	14	Zone2-Above-GW-9	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	15	Zone2-Above-GW-10	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	16	Zone2-Above-GW-11	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	17	Zone2-Above-GW-12	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	18	Zone2-Above-GW-13	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	19	Zone2-Above-GW-14	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	20	Zone2-Above-GW-15	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	21	Zone2-Above-GW-16	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	22	Zone2-Above-GW-17	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	23	Zone3-Above-GW-1	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	24	Zone3-Above-GW-2	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	25	Zone2-Below-GW-18	19.6	19.6	19.6	19.6	19.6	19.6	19.6	19.6	19.6	19.6
	26	Zone2-Below-GW-19	19.6	19.6	19.6	19.6	19.6	19.6	19.6	19.6	19.6	19.6
	27	Zone3-Below-GW-3	19.6	19.6	19.6	19.6	19.6	19.6	19.6	19.6	19.6	19.6
	28											
	29	Soil Above GW	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
	30	Soil below GW	19.6	19.6	19.6	19.6	19.6	19.6	19.6	19.6	19.6	19.6
	Layer No.	1	Cover									
			Initial Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1
			Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1
			Midpoint Elevation, (m / ft)	449.38	449.41	449.46	450.02	449.99	449.95	449.98	449.98	449.45
			Initial Effective Stress, σ'_i (kPa / psf)	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight
Elastic Method			Final Effective Stress, σ'_f (kPa/psf)	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight
	Modulus, E (kPa/psf)=		Strain									
			Settlement (m / ft)									
	1-D Consolidation Theory (Plastic Method)											
	Consolidation Properties											
	OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)											
	OCR Manual Input Value											
	OCR Computation Input											
	Preconsolidation pressure, σ'_p (kPa / psf)											
	Modified Primary Compression Index, C_{ce}											
	Modified Recompression Index, C_{re}											
	Modified Secondary Compression Index, C_{α}											
	ratio of t_2 / t_1											
	Settlements											
	Primary Settlement, (m / ft)											
	Secondary Settlement (m / ft)											
	Total Settlement (m / ft)											
	Elastic or Plastic (E/P)											
	Settlement of Layer 1 (m / ft)											

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: Honeywell Project: Onondaga Lake SCA Final Design Project/ Proposal No.: GJ4299 Task No.: 04

Layer No. 2	Dredge										
Initial Stress Reference Layer (top of layer)		2	2	2	2	2	2	2	2	2	2
Final Stress Reference Layer (top of layer)		2	2	2	2	2	2	2	2	2	2
Midpoint Elevation, (m / ft)		434.05	434.05	434.14	435.23	435.17	435.12	435.21	435.21	434.18	434.10
Initial Effective Stress, σ'_i (kPa / psf)		Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight
Final Effective Stress, σ'_f (kPa/psf)		Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight
Elastic Method											
Modulus, E (kPa/psf)=	Strain										
	Settlement (m / ft)										
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)											
OCR Manual Input Value											
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)											
Modified Primary Compression Index, C_{ce}											
Modified Recompression Index, C_{re}											
Modified Secondary Compression Index, $C_{\alpha\alpha}$											
ratio of t_2 / t_1											
Settlements											
Primary Settlement, (m / ft)											
Secondary Settlement (m / ft)											
Total Settlement (m / ft)											
Elastic or Plastic (E/P)											
Settlement of Layer 2 (m / ft)											
Layer No. 3	Gravel										
Initial Stress Reference Layer (top of layer)		3	3	3	3	3	3	3	3	3	3
Final Stress Reference Layer (top of layer)		3	3	3	3	3	3	3	3	3	3
Midpoint Elevation, (m / ft)		417.17	417.08	417.17	414.33	414.20	414.15	414.25	414.31	417.21	417.13
Initial Effective Stress, σ'_i (kPa / psf)		Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight
Final Effective Stress, σ'_f (kPa/psf)		Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight
Elastic Method											
Modulus, E (kPa/psf)=	Strain										
	Settlement (m / ft)										
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)											
OCR Manual Input Value											
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)											
Modified Primary Compression Index, C_{ce}											
Modified Recompression Index, C_{re}											
Modified Secondary Compression Index, $C_{\alpha\alpha}$											
ratio of t_2 / t_1											
Settlements											
Primary Settlement, (m / ft)											
Secondary Settlement (m / ft)											
Total Settlement (m / ft)											
Elastic or Plastic (E/P)											
Settlement of Layer 3 (m / ft)											
Layer No. 4	Clay										
Initial Stress Reference Layer (top of layer)		4	4	4	4	4	4	4	4	4	4
Final Stress Reference Layer (top of layer)		4	4	4	4	4	4	4	4	4	4
Midpoint Elevation, (m / ft)		412.89	412.98	413.01	406.25	406.12	406.11	406.21	406.27	413.11	413.09
Initial Effective Stress, σ'_i (kPa / psf)		Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight
Final Effective Stress, σ'_f (kPa/psf)		Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight
Elastic Method											
Modulus, E (kPa/psf)=	Strain										
	Settlement (m / ft)										
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)											
OCR Manual Input Value											
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)											
Modified Primary Compression Index, C_{ce}											
Modified Recompression Index, C_{re}											
Modified Secondary Compression Index, $C_{\alpha\alpha}$											
ratio of t_2 / t_1											
Settlements											
Primary Settlement, (m / ft)											
Secondary Settlement (m / ft)											
Total Settlement (m / ft)											
Elastic or Plastic (E/P)											
Settlement of Layer 4 (m / ft)											

Written by: **Yiwen Cao** Date: **12/17/2009** Reviewed by: **R. Kulasingam/Jay Beech** Date: **12/17/2009**

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

	Layer No. 5	Dike											
	Initial Stress Reference Layer (top of layer)			5	5	5	5	5	5	5	5	5	
	Final Stress Reference Layer (top of layer)			5	5	5	5	5	5	5	5	5	
	Midpoint Elevation, (m / ft)			411.77	412.14	412.11	405.36	405.29	405.33	405.42	405.42	412.27	412.30
	Initial Effective Stress, σ _i ' (kPa /psf)			Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight
Final Effective Stress, σ _f ' (kPa/psf)				Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	Weight	
Elastic Method													
Modulus, E (kPa/psf)=				Strain									
				Settlement (m / ft)									
1-D Consolidation Theory (Plastic Method)													
Consolidation Properties													
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)													
OCR Manual Input Value													
OCR Computation Input													
Preconsolidation pressure, σ _p ' (kPa / psf)													
Modified Primary Compression Index, C _{cc}													
Modified Recompression Index, C _{ce}													
Modified Secondary Compression Index, C _{αc}													
ratio of t2 / t1													
Settlements													
Primary Settlement, (m / ft)													
Secondary Settlement (m / ft)													
Total Settlement (m / ft)													
				Elastic or Plastic (E/P)									
				Settlement of Layer 5 (m / ft)									
	Layer No. 6	Zone2-Above-GW-1											
	Initial Stress Reference Layer (top of layer)			2	2	2	2	2	2	2	2	2	
	Final Stress Reference Layer (top of layer)			1	1	1	1	1	1	1	1	1	
	Midpoint Elevation, (m / ft)			410.69	411.05	411.02	404.47	404.40	404.44	404.53	404.53	411.17	411.20
	Initial Effective Stress, σ _i ' (kPa /psf)			3,475	3,431	3,446	4,371	4,371	4,361	4,361	4,361	3,432	3,419
Final Effective Stress, σ _f ' (kPa/psf)				3,848	3,778	3,792	4,686	4,687	4,663	4,678	4,678	3,783	3,770
Elastic Method													
Modulus, E (kPa/psf)=				Strain									
				Settlement (m / ft)									
1-D Consolidation Theory (Plastic Method)													
Consolidation Properties													
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)													
OCR Manual Input Value													
OCR Computation Input													
Preconsolidation pressure, σ _p ' (kPa / psf)													
Modified Primary Compression Index, C _{cc}													
Modified Recompression Index, C _{ce}													
Modified Secondary Compression Index, C _{αc}													
ratio of t2 / t1													
Settlements													
Primary Settlement, (m / ft)													
Secondary Settlement (m / ft)													
Total Settlement (m / ft)													
				Elastic or Plastic (E/P)									
				Settlement of Layer 6 (m / ft)		1-D	1-D	1-D	1-D	1-D	1-D	1-D	
						0.063	0.061	0.061	0.040	0.040	0.039	0.040	
	Layer No. 7	Zone2-Above-GW-2											
	Initial Stress Reference Layer (top of layer)			2	2	2	2	2	2	2	2	2	
	Final Stress Reference Layer (top of layer)			1	1	1	1	1	1	1	1	1	
	Midpoint Elevation, (m / ft)			408.53	408.86	408.84	402.68	402.62	402.65	402.74	402.74	408.98	409.01
	Initial Effective Stress, σ _i ' (kPa /psf)			3,652	3,610	3,625	4,517	4,517	4,507	4,508	4,508	3,611	3,598
Final Effective Stress, σ _f ' (kPa/psf)				4,024	3,957	3,971	4,834	4,834	4,809	4,825	4,825	3,963	3,950
Elastic Method													
Modulus, E (kPa/psf)=				Strain									
				Settlement (m / ft)									
1-D Consolidation Theory (Plastic Method)													
Consolidation Properties													
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)													
OCR Manual Input Value													
OCR Computation Input													
Preconsolidation pressure, σ _p ' (kPa / psf)													
Modified Primary Compression Index, C _{cc}													
Modified Recompression Index, C _{ce}													
Modified Secondary Compression Index, C _{αc}													
ratio of t2 / t1													
Settlements													
Primary Settlement, (m / ft)													
Secondary Settlement (m / ft)													
Total Settlement (m / ft)													
				Elastic or Plastic (E/P)									
				Settlement of Layer 7 (m / ft)		1-D	1-D	1-D	1-D	1-D	1-D	1-D	
						0.060	0.059	0.058	0.040	0.039	0.038	0.040	

Written by: **Yiwen Cao** Date: **12/17/2009** Reviewed by: **R. Kulasingam/Jay Beech** Date: **12/17/2009**

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

Layer No.	8	Zone2-Above-GW-3									
Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2	2	2
Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1	1
Midpoint Elevation, (m / ft)	406.36	406.68	406.65	400.90	400.84	400.87	400.95	400.95	406.79	406.81	
Initial Effective Stress, σ'_i (kPa / psf)	3,830	3,790	3,804	4,663	4,663	4,653	4,655	4,655	3,791	3,778	
Final Effective Stress, σ'_f (kPa/psf)	4,200	4,138	4,149	4,980	4,980	4,958	4,973	4,973	4,143	4,130	
Elastic Method											
Modulus, E (kPa/psf)=											
Strain											
Settlement (m / ft)											
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)	MS	MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value	2.0	2.0	2.0	1.0	1.0	1.0	1.0	1.0	2.0	2.0	
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)	2,485	2,486	2,490	1,719	1,724	1,725	1,723	1,723	2,495	2,490	
Modified Primary Compression Index, C_{ce}	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	
Modified Recompression Index, C_{re}	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	
Modified Secondary Compression Index, $C_{\alpha\alpha}$	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	
ratio of t_2 / t_1	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	
Settlements											
Primary Settlement, (m / ft)	0.040	0.038	0.038	0.023	0.023	0.023	0.024	0.024	0.039	0.039	
Secondary Settlement (m / ft)	0.019	0.019	0.019	0.015	0.015	0.015	0.015	0.015	0.019	0.019	
Total Settlement (m / ft)	0.058	0.057	0.057	0.039	0.039	0.038	0.039	0.039	0.058	0.058	
Elastic or Plastic (E/P)											
Settlement of Layer 8 (m / ft)	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	
	0.058	0.057	0.057	0.039	0.039	0.038	0.039	0.039	0.058	0.058	
Layer No.	9	Zone2-Above-GW-4									
Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2	2	
Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1	
Midpoint Elevation, (m / ft)	404.20	404.49	404.47	399.11	399.05	399.09	399.16	399.16	404.60	404.62	
Initial Effective Stress, σ'_i (kPa / psf)	4,007	3,969	3,983	4,810	4,810	4,799	4,801	4,801	3,971	3,958	
Final Effective Stress, σ'_f (kPa/psf)	4,376	4,317	4,328	5,128	5,128	5,107	5,122	5,122	4,323	4,311	
Elastic Method											
Modulus, E (kPa/psf)=											
Strain											
Settlement (m / ft)											
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)	MS	MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value	2.0	2.0	2.0	1.0	1.0	1.0	1.0	1.0	2.0	2.0	
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)	2,839	2,844	2,848	1,866	1,870	1,872	1,870	1,870	2,854	2,850	
Modified Primary Compression Index, C_{ce}	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	
Modified Recompression Index, C_{re}	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	
Modified Secondary Compression Index, $C_{\alpha\alpha}$	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	
ratio of t_2 / t_1	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	
Settlements											
Primary Settlement, (m / ft)	0.038	0.037	0.036	0.023	0.023	0.022	0.023	0.023	0.037	0.037	
Secondary Settlement (m / ft)	0.019	0.019	0.019	0.015	0.015	0.015	0.015	0.015	0.019	0.019	
Total Settlement (m / ft)	0.057	0.055	0.055	0.038	0.038	0.037	0.038	0.038	0.056	0.056	
Elastic or Plastic (E/P)											
Settlement of Layer 9 (m / ft)	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	
	0.057	0.055	0.055	0.038	0.038	0.037	0.038	0.038	0.056	0.056	
Layer No.	10	Zone2-Above-GW-5									
Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2	2	
Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1	
Midpoint Elevation, (m / ft)	402.04	402.31	402.29	397.32	397.27	397.30	397.37	397.37	402.40	402.43	
Initial Effective Stress, σ'_i (kPa / psf)	4,184	4,148	4,162	4,956	4,956	4,946	4,948	4,948	4,151	4,138	
Final Effective Stress, σ'_f (kPa/psf)	4,553	4,496	4,507	5,276	5,276	5,255	5,271	5,271	4,504	4,491	
Elastic Method											
Modulus, E (kPa/psf)=											
Strain											
Settlement (m / ft)											
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)	MS	MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value	2.0	2.0	2.0	1.0	1.0	1.0	1.0	1.0	2.0	2.0	
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)	3,194	3,202	3,206	2,012	2,017	2,018	2,016	2,016	3,214	3,210	
Modified Primary Compression Index, C_{ce}	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	
Modified Recompression Index, C_{re}	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	
Modified Secondary Compression Index, $C_{\alpha\alpha}$	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	
ratio of t_2 / t_1	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	
Settlements											
Primary Settlement, (m / ft)	0.036	0.035	0.035	0.022	0.022	0.022	0.023	0.023	0.036	0.036	
Secondary Settlement (m / ft)	0.019	0.019	0.019	0.015	0.015	0.015	0.015	0.015	0.019	0.019	
Total Settlement (m / ft)	0.055	0.054	0.053	0.038	0.038	0.037	0.038	0.038	0.055	0.055	
Elastic or Plastic (E/P)											
Settlement of Layer 10 (m / ft)	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	
	0.055	0.054	0.053	0.038	0.038	0.037	0.038	0.038	0.055	0.055	

Written by: **Yiwen Cao** Date: **12/17/2009** Reviewed by: **R. Kulasingam/Jay Beech** Date: **12/17/2009**

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

Layer No.	11	Zone2-Above-GW-6									
Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2	2	2
Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1	1
Midpoint Elevation, (m / ft)	399.87	400.12	400.10	395.54	395.49	395.52	395.58	395.58	400.21	400.23	
Initial Effective Stress, σ'_i (kPa / psf)	4,362	4,327	4,341	5,103	5,102	5,092	5,095	5,095	4,331	4,318	
Final Effective Stress, σ'_f (kPa/psf)	4,729	4,674	4,685	5,424	5,423	5,404	5,419	5,419	4,684	4,672	
Elastic Method											
Modulus, E (kPa/psf)=											
Strain											
Settlement (m / ft)											
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)	MS	MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)	1,774	1,780	1,782	2,159	2,163	2,164	2,163	2,163	1,787	1,785	
Modified Primary Compression Index, C_{ce}	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	
Modified Recompression Index, C_{re}	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	
Modified Secondary Compression Index, $C_{\alpha\alpha}$	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	
ratio of t_2 / t_1	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	
Settlements											
Primary Settlement, (m / ft)	0.035	0.034	0.033	0.022	0.022	0.021	0.022	0.022	0.034	0.034	
Secondary Settlement (m / ft)	0.019	0.019	0.019	0.015	0.015	0.015	0.015	0.015	0.019	0.019	
Total Settlement (m / ft)	0.054	0.052	0.052	0.037	0.037	0.036	0.037	0.037	0.053	0.053	
Elastic or Plastic (E/P)											
Settlement of Layer 11 (m / ft)	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	
	0.054	0.052	0.052	0.037	0.037	0.036	0.037	0.037	0.053	0.053	
Layer No.	12	Zone2-Above-GW-7									
Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2	2	
Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1	
Midpoint Elevation, (m / ft)	397.71	397.94	397.92	393.75	393.71	393.73	393.79	393.79	398.02	398.04	
Initial Effective Stress, σ'_i (kPa / psf)	4,539	4,506	4,520	5,249	5,248	5,238	5,241	5,241	4,510	4,498	
Final Effective Stress, σ'_f (kPa/psf)	4,906	4,853	4,864	5,572	5,571	5,552	5,568	5,568	4,864	4,856	
Elastic Method											
Modulus, E (kPa/psf)=											
Strain											
Settlement (m / ft)											
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)	MS	MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)	1,952	1,960	1,961	2,305	2,309	2,311	2,310	2,310	1,966	1,965	
Modified Primary Compression Index, C_{ce}	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	
Modified Recompression Index, C_{re}	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	
Modified Secondary Compression Index, $C_{\alpha\alpha}$	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	
ratio of t_2 / t_1	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	
Settlements											
Primary Settlement, (m / ft)	0.034	0.032	0.032	0.021	0.021	0.021	0.022	0.022	0.033	0.034	
Secondary Settlement (m / ft)	0.019	0.019	0.019	0.015	0.015	0.015	0.015	0.015	0.019	0.019	
Total Settlement (m / ft)	0.052	0.051	0.051	0.037	0.037	0.036	0.037	0.037	0.052	0.052	
Elastic or Plastic (E/P)											
Settlement of Layer 12 (m / ft)	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	
	0.052	0.051	0.051	0.037	0.037	0.036	0.037	0.037	0.052	0.052	
Layer No.	13	Zone2-Above-GW-8									
Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2	2	
Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1	
Midpoint Elevation, (m / ft)	395.55	395.75	395.74	391.97	391.93	391.95	392.00	392.00	395.83	395.84	
Initial Effective Stress, σ'_i (kPa / psf)	4,716	4,685	4,699	5,396	5,394	5,385	5,388	5,388	4,690	4,678	
Final Effective Stress, σ'_f (kPa/psf)	5,082	5,032	5,043	5,720	5,718	5,701	5,716	5,716	5,045	5,036	
Elastic Method											
Modulus, E (kPa/psf)=											
Strain											
Settlement (m / ft)											
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)	MS	MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)	2,129	2,139	2,140	2,452	2,455	2,457	2,456	2,457	2,146	2,145	
Modified Primary Compression Index, C_{ce}	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	
Modified Recompression Index, C_{re}	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	
Modified Secondary Compression Index, $C_{\alpha\alpha}$	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	
ratio of t_2 / t_1	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	
Settlements											
Primary Settlement, (m / ft)	0.032	0.031	0.031	0.021	0.021	0.020	0.021	0.021	0.032	0.032	
Secondary Settlement (m / ft)	0.019	0.019	0.019	0.015	0.015	0.015	0.015	0.015	0.019	0.019	
Total Settlement (m / ft)	0.051	0.050	0.050	0.036	0.036	0.036	0.036	0.036	0.051	0.051	
Elastic or Plastic (E/P)											
Settlement of Layer 13 (m / ft)	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	
	0.051	0.050	0.050	0.036	0.036	0.036	0.036	0.036	0.051	0.051	

Written by: **Yiwen Cao** Date: **12/17/2009** Reviewed by: **R. Kulasingam/Jay Beech** Date: **12/17/2009**

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

Layer No.	14	Zone2-Above-GW-9									
Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2	2	2
Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1	1
Midpoint Elevation, (m / ft)	393.39	393.57	393.56	390.18	390.15	390.17	390.21	390.21	393.64	393.65	
Initial Effective Stress, σ'_i (kPa / psf)	4,894	4,865	4,878	5,542	5,540	5,531	5,535	5,535	4,870	4,858	
Final Effective Stress, σ'_f (kPa/psf)	5,258	5,209	5,222	5,868	5,866	5,849	5,865	5,865	5,226	5,214	
Elastic Method											
Modulus, E (kPa/psf)=											
Strain											
Settlement (m / ft)											
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)	MS	MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)	2,307	2,318	2,319	2,598	2,601	2,603	2,603	2,603	2,326	2,325	
Modified Primary Compression Index, C_{ce}	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	
Modified Recompression Index, C_{re}	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	
Modified Secondary Compression Index, $C_{\alpha\alpha}$	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	
ratio of t_2 / t_1	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	
Settlements											
Primary Settlement, (m / ft)	0.031	0.030	0.030	0.020	0.020	0.020	0.021	0.021	0.031	0.031	
Secondary Settlement (m / ft)	0.019	0.019	0.019	0.015	0.015	0.015	0.015	0.015	0.019	0.019	
Total Settlement (m / ft)	0.050	0.049	0.048	0.036	0.036	0.035	0.036	0.036	0.050	0.050	
Elastic or Plastic (E/P)											
Settlement of Layer 14 (m / ft)	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	
	0.050	0.049	0.048	0.036	0.036	0.035	0.036	0.036	0.050	0.050	
Layer No.	15	Zone2-Above-GW-10									
Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2	2	
Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1	
Midpoint Elevation, (m / ft)	391.22	391.39	391.37	388.39	388.36	388.38	388.42	388.42	391.44	391.46	
Initial Effective Stress, σ'_i (kPa / psf)	5,071	5,044	5,057	5,689	5,686	5,677	5,682	5,682	5,050	5,038	
Final Effective Stress, σ'_f (kPa/psf)	5,435	5,389	5,402	6,016	6,013	5,998	6,013	6,013	5,406	5,394	
Elastic Method											
Modulus, E (kPa/psf)=											
Strain											
Settlement (m / ft)											
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)	MS	MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)	2,484	2,497	2,498	2,744	2,747	2,750	2,750	2,750	2,506	2,505	
Modified Primary Compression Index, C_{ce}	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	
Modified Recompression Index, C_{re}	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	
Modified Secondary Compression Index, $C_{\alpha\alpha}$	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	
ratio of t_2 / t_1	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	
Settlements											
Primary Settlement, (m / ft)	0.030	0.029	0.029	0.020	0.020	0.020	0.020	0.020	0.030	0.030	
Secondary Settlement (m / ft)	0.019	0.019	0.019	0.015	0.015	0.015	0.015	0.015	0.019	0.019	
Total Settlement (m / ft)	0.049	0.048	0.047	0.035	0.035	0.035	0.036	0.036	0.049	0.049	
Elastic or Plastic (E/P)											
Settlement of Layer 15 (m / ft)	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	
	0.049	0.048	0.047	0.035	0.035	0.035	0.036	0.036	0.049	0.049	
Layer No.	16	Zone2-Above-GW-11									
Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2	2	
Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1	
Midpoint Elevation, (m / ft)	389.06	389.20	389.19	386.61	386.58	386.60	386.63	386.63	389.25	389.26	
Initial Effective Stress, σ'_i (kPa / psf)	5,248	5,223	5,236	5,835	5,832	5,824	5,828	5,828	5,229	5,218	
Final Effective Stress, σ'_f (kPa/psf)	5,612	5,568	5,581	6,164	6,161	6,146	6,162	6,162	5,587	5,575	
Elastic Method											
Modulus, E (kPa/psf)=											
Strain											
Settlement (m / ft)											
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)	MS	MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)	2,661	2,676	2,677	2,891	2,893	2,896	2,897	2,897	2,685	2,685	
Modified Primary Compression Index, C_{ce}	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	
Modified Recompression Index, C_{re}	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	
Modified Secondary Compression Index, $C_{\alpha\alpha}$	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	
ratio of t_2 / t_1	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	
Settlements											
Primary Settlement, (m / ft)	0.029	0.028	0.028	0.020	0.020	0.019	0.020	0.020	0.029	0.029	
Secondary Settlement (m / ft)	0.019	0.019	0.019	0.015	0.015	0.015	0.015	0.015	0.019	0.019	
Total Settlement (m / ft)	0.048	0.047	0.047	0.035	0.035	0.034	0.035	0.035	0.048	0.048	
Elastic or Plastic (E/P)											
Settlement of Layer 16 (m / ft)	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	
	0.048	0.047	0.047	0.035	0.035	0.034	0.035	0.035	0.048	0.048	

Written by: **Yiwen Cao** Date: **12/17/2009** Reviewed by: **R. Kulasingam/Jay Beech** Date: **12/17/2009**

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

Layer No.	17	Zone2-Above-GW-12									
Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2	2	2
Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1	1
Midpoint Elevation, (m / ft)	386.90	387.02	387.01	384.82	384.80	384.81	384.84	384.84	387.06	387.07	
Initial Effective Stress, σ'_i (kPa / psf)	5,426	5,402	5,415	5,981	5,978	5,970	5,975	5,975	5,409	5,398	
Final Effective Stress, σ'_f (kPa/psf)	5,789	5,749	5,760	6,311	6,308	6,294	6,310	6,310	5,767	5,756	
Elastic Method											
Modulus, E (kPa/psf)=											
Strain											
Settlement (m / ft)											
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)	MS	MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)	2,839	2,855	2,856	3,037	3,039	3,042	3,043	3,043	2,865	2,864	
Modified Primary Compression Index, C_{cc}	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	
Modified Recompression Index, C_{re}	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	
Modified Secondary Compression Index, $C_{\alpha\alpha}$	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	
ratio of t_2 / t_1	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	
Settlements											
Primary Settlement, (m / ft)	0.028	0.027	0.027	0.019	0.019	0.019	0.019	0.019	0.028	0.028	
Secondary Settlement (m / ft)	0.019	0.019	0.019	0.015	0.015	0.015	0.015	0.015	0.019	0.019	
Total Settlement (m / ft)	0.047	0.046	0.046	0.034	0.034	0.034	0.035	0.035	0.047	0.047	
Elastic or Plastic (E/P)											
1-D	P	P	P	P	P	P	P	P	P	P	
Settlement of Layer 17 (m / ft)	0.047	0.046	0.046	0.034	0.034	0.034	0.035	0.035	0.047	0.047	
Layer No.	18	Zone2-Above-GW-13									
Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2	2	
Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1	
Midpoint Elevation, (m / ft)	384.73	384.83	384.82	383.04	383.02	383.03	383.05	383.05	384.87	384.87	
Initial Effective Stress, σ'_i (kPa / psf)	5,603	5,581	5,594	6,128	6,124	6,116	6,122	6,122	5,589	5,578	
Final Effective Stress, σ'_f (kPa/psf)	5,967	5,929	5,939	6,459	6,456	6,440	6,458	6,458	5,948	5,936	
Elastic Method											
Modulus, E (kPa/psf)=											
Strain											
Settlement (m / ft)											
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)	MS	MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)	3,016	3,034	3,035	3,184	3,185	3,188	3,190	3,190	3,045	3,044	
Modified Primary Compression Index, C_{cc}	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	
Modified Recompression Index, C_{re}	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	
Modified Secondary Compression Index, $C_{\alpha\alpha}$	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	
ratio of t_2 / t_1	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	
Settlements											
Primary Settlement, (m / ft)	0.027	0.026	0.026	0.019	0.019	0.018	0.019	0.019	0.027	0.027	
Secondary Settlement (m / ft)	0.019	0.019	0.019	0.015	0.015	0.015	0.015	0.015	0.019	0.019	
Total Settlement (m / ft)	0.046	0.045	0.045	0.034	0.034	0.034	0.034	0.034	0.046	0.046	
Elastic or Plastic (E/P)											
1-D	P	P	P	P	P	P	P	P	P	P	
Settlement of Layer 18 (m / ft)	0.046	0.045	0.045	0.034	0.034	0.034	0.034	0.034	0.046	0.046	
Layer No.	19	Zone2-Above-GW-14									
Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2	2	
Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1	
Midpoint Elevation, (m / ft)	382.57	382.65	382.64	381.25	381.24	381.24	381.26	381.26	382.67	382.68	
Initial Effective Stress, σ'_i (kPa / psf)	5,781	5,760	5,773	6,274	6,271	6,262	6,269	6,269	5,769	5,757	
Final Effective Stress, σ'_f (kPa/psf)	6,144	6,108	6,119	6,606	6,602	6,588	6,605	6,605	6,128	6,117	
Elastic Method											
Modulus, E (kPa/psf)=											
Strain											
Settlement (m / ft)											
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)	MS	MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)	3,193	3,214	3,214	3,330	3,331	3,335	3,337	3,337	3,225	3,224	
Modified Primary Compression Index, C_{cc}	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	
Modified Recompression Index, C_{re}	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	
Modified Secondary Compression Index, $C_{\alpha\alpha}$	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	
ratio of t_2 / t_1	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	
Settlements											
Primary Settlement, (m / ft)	0.026	0.026	0.025	0.018	0.018	0.018	0.019	0.019	0.026	0.027	
Secondary Settlement (m / ft)	0.019	0.019	0.019	0.015	0.015	0.015	0.015	0.015	0.019	0.019	
Total Settlement (m / ft)	0.045	0.044	0.044	0.034	0.034	0.033	0.034	0.034	0.045	0.045	
Elastic or Plastic (E/P)											
1-D	P	P	P	P	P	P	P	P	P	P	
Settlement of Layer 19 (m / ft)	0.045	0.044	0.044	0.034	0.034	0.033	0.034	0.034	0.045	0.045	

Written by: **Yiwen Cao** Date: **12/17/2009** Reviewed by: **R. Kulasingam/Jay Beech** Date: **12/17/2009**

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

Layer No.	20	Zone2-Above-GW-15									
Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2	2	2
Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1	1
Midpoint Elevation, (m / ft)	380.41	380.46	380.46	379.46	379.45	379.46	379.47	379.47	380.48	380.49	
Initial Effective Stress, σ'_i (kPa / psf)	5,958	5,939	5,952	6,421	6,417	6,409	6,415	6,415	5,948	5,937	
Final Effective Stress, σ'_f (kPa/psf)	6,321	6,288	6,298	6,753	6,749	6,737	6,753	6,753	6,309	6,300	
Elastic Method											
Modulus, E (kPa/psf)=											
Strain											
Settlement (m / ft)											
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)	MS	MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)	3,371	3,393	3,393	3,477	3,478	3,481	3,484	3,484	3,405	3,404	
Modified Primary Compression Index, C_{ce}	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	
Modified Recompression Index, C_{re}	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	
Modified Secondary Compression Index, $C_{\alpha\alpha}$	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	
ratio of t_2 / t_1	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	
Settlements											
Primary Settlement, (m / ft)	0.026	0.025	0.025	0.018	0.018	0.018	0.018	0.018	0.026	0.026	
Secondary Settlement (m / ft)	0.019	0.019	0.019	0.015	0.015	0.015	0.015	0.015	0.019	0.019	
Total Settlement (m / ft)	0.044	0.044	0.043	0.033	0.033	0.033	0.034	0.034	0.045	0.045	
Elastic or Plastic (E/P)											
Settlement of Layer 20 (m / ft)	0.044	0.044	0.043	0.033	0.033	0.033	0.034	0.034	0.045	0.045	
Layer No.	21	Zone2-Above-GW-16									
Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2	2	
Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1	
Midpoint Elevation, (m / ft)	378.24	378.28	378.27	377.68	377.67	377.68	377.68	377.68	378.29	378.29	
Initial Effective Stress, σ'_i (kPa / psf)	6,135	6,119	6,131	6,567	6,563	6,555	6,562	6,562	6,128	6,117	
Final Effective Stress, σ'_f (kPa/psf)	6,498	6,467	6,478	6,901	6,897	6,885	6,902	6,902	6,489	6,481	
Elastic Method											
Modulus, E (kPa/psf)=											
Strain											
Settlement (m / ft)											
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)	MS	MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)	3,548	3,572	3,572	3,623	3,624	3,627	3,630	3,630	3,584	3,584	
Modified Primary Compression Index, C_{ce}	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	
Modified Recompression Index, C_{re}	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	
Modified Secondary Compression Index, $C_{\alpha\alpha}$	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	
ratio of t_2 / t_1	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	
Settlements											
Primary Settlement, (m / ft)	0.025	0.024	0.024	0.018	0.018	0.017	0.018	0.018	0.025	0.025	
Secondary Settlement (m / ft)	0.019	0.019	0.019	0.015	0.015	0.015	0.015	0.015	0.019	0.019	
Total Settlement (m / ft)	0.043	0.043	0.043	0.033	0.033	0.033	0.033	0.033	0.044	0.044	
Elastic or Plastic (E/P)											
Settlement of Layer 21 (m / ft)	0.043	0.043	0.043	0.033	0.033	0.033	0.033	0.033	0.044	0.044	
Layer No.	22	Zone2-Above-GW-17									
Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2	2	
Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1	
Midpoint Elevation, (m / ft)	376.08	376.09	376.09	375.89	375.89	375.89	375.89	375.89	376.10	376.10	
Initial Effective Stress, σ'_i (kPa / psf)	6,313	6,298	6,310	6,714	6,709	6,701	6,709	6,709	6,308	6,297	
Final Effective Stress, σ'_f (kPa/psf)	6,676	6,647	6,658	7,049	7,044	7,033	7,050	7,050	6,671	6,660	
Elastic Method											
Modulus, E (kPa/psf)=											
Strain											
Settlement (m / ft)											
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)	MS	MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)	3,725	3,751	3,751	3,770	3,770	3,774	3,777	3,777	3,764	3,764	
Modified Primary Compression Index, C_{ce}	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	
Modified Recompression Index, C_{re}	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	
Modified Secondary Compression Index, $C_{\alpha\alpha}$	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	
ratio of t_2 / t_1	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	
Settlements											
Primary Settlement, (m / ft)	0.024	0.024	0.023	0.017	0.017	0.017	0.018	0.018	0.024	0.025	
Secondary Settlement (m / ft)	0.019	0.019	0.019	0.015	0.015	0.015	0.015	0.015	0.019	0.019	
Total Settlement (m / ft)	0.043	0.042	0.042	0.033	0.033	0.032	0.033	0.033	0.043	0.043	
Elastic or Plastic (E/P)											
Settlement of Layer 22 (m / ft)	0.043	0.042	0.042	0.033	0.033	0.032	0.033	0.033	0.043	0.043	

Written by: **Yiwen Cao** Date: **12/17/2009** Reviewed by: **R. Kulasingam/Jay Beech** Date: **12/17/2009**

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

	Layer No.	Zone3-Above-GW-1									
	Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2	2
	Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1
	Midpoint Elevation, (m / ft)	375.00	375.00	375.00	375.00	375.00	375.00	375.00	375.00	375.00	375.00
	Initial Effective Stress, σ'_i (kPa /psf)	6,401	6,387	6,399	6,787	6,782	6,774	6,782	6,782	6,398	6,387
	Final Effective Stress, σ'_f (kPa/psf)	6,765	6,737	6,747	7,123	7,118	7,108	7,125	7,125	6,760	6,750
Elastic Method											
Modulus, E (kPa/psf)=		Strain									
		Settlement (m / ft)									
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)		MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value		1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)		3,814	3,841	3,841	3,843	3,843	3,847	3,850	3,850	3,854	3,854
Modified Primary Compression Index, C_{cc}		0.380	0.380	0.380	0.380	0.380	0.380	0.380	0.380	0.380	0.380
Modified Recompression Index, C_{re}		0.021	0.021	0.021	0.021	0.021	0.021	0.021	0.021	0.021	0.021
Modified Secondary Compression Index, $C_{\alpha\alpha}$		0.70%	0.70%	0.70%	0.70%	0.70%	0.70%	0.70%	0.70%	0.70%	0.70%
ratio of t2 / t1		8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75
Settlements											
Primary Settlement, (m / ft)		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Secondary Settlement (m / ft)		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Total Settlement (m / ft)		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Elastic or Plastic (E/P)											
		P	P	P	P	P	P	P	P	P	P
		1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D
Settlement of Layer 23 (m / ft)		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	Layer No.	Zone3-Above-GW-2									
	Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2	2
	Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1
	Midpoint Elevation, (m / ft)	375.00	375.00	375.00	375.00	375.00	375.00	375.00	375.00	375.00	375.00
	Initial Effective Stress, σ'_i (kPa /psf)	6,401	6,387	6,399	6,787	6,782	6,774	6,782	6,782	6,398	6,387
	Final Effective Stress, σ'_f (kPa/psf)	6,765	6,737	6,747	7,123	7,118	7,108	7,125	7,125	6,760	6,750
Elastic Method											
Modulus, E (kPa/psf)=		Strain									
		Settlement (m / ft)									
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)		MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value		1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)		3,814	3,841	3,841	3,843	3,843	3,847	3,850	3,850	3,854	3,854
Modified Primary Compression Index, C_{cc}		0.380	0.380	0.380	0.380	0.380	0.380	0.380	0.380	0.380	0.380
Modified Recompression Index, C_{re}		0.021	0.021	0.021	0.021	0.021	0.021	0.021	0.021	0.021	0.021
Modified Secondary Compression Index, $C_{\alpha\alpha}$		0.70%	0.70%	0.70%	0.70%	0.70%	0.70%	0.70%	0.70%	0.70%	0.70%
ratio of t2 / t1		8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75
Settlements											
Primary Settlement, (m / ft)		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Secondary Settlement (m / ft)		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Total Settlement (m / ft)		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Elastic or Plastic (E/P)											
		P	P	P	P	P	P	P	P	P	P
		1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D
Settlement of Layer 24 (m / ft)		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	Layer No.	Zone2-Below-GW-18									
	Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2	2
	Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1
	Midpoint Elevation, (m / ft)	372.50	372.50	372.50	372.50	372.50	372.50	372.50	372.50	372.50	372.50
	Initial Effective Stress, σ'_i (kPa /psf)	6,450	6,436	6,448	6,836	6,831	6,823	6,831	6,831	6,447	6,436
	Final Effective Stress, σ'_f (kPa/psf)	6,814	6,786	6,797	7,174	7,169	7,158	7,175	7,175	6,810	6,802
Elastic Method											
Modulus, E (kPa/psf)=		Strain									
		Settlement (m / ft)									
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)		MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value		1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)		3,863	3,890	3,890	3,892	3,892	3,896	3,899	3,899	3,903	3,903
Modified Primary Compression Index, C_{cc}		0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460
Modified Recompression Index, C_{re}		0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014
Modified Secondary Compression Index, $C_{\alpha\alpha}$		0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%
ratio of t2 / t1		8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75
Settlements											
Primary Settlement, (m / ft)		0.055	0.053	0.053	0.048	0.048	0.048	0.049	0.049	0.055	0.055
Secondary Settlement (m / ft)		0.043	0.043	0.043	0.043	0.043	0.043	0.043	0.043	0.043	0.043
Total Settlement (m / ft)		0.098	0.096	0.095	0.091	0.091	0.091	0.092	0.092	0.098	0.098
Elastic or Plastic (E/P)											
		1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D
Settlement of Layer 25 (m / ft)		0.098	0.096	0.095	0.091	0.091	0.091	0.092	0.092	0.098	0.098

Written by: Yiwen Cao Date: 12/17/2009 Reviewed by: R. Kulasingam/Jay Beech Date: 12/17/2009

Client: Honeywell Project: Onondaga Lake SCA Final Design Project/ Proposal No.: GJ4299 Task No.: 04

Layer No.	26	Zone2-Below-GW-19									
Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2	2	2
Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1	1
Midpoint Elevation, (m / ft)	367.50	367.50	367.50	367.50	367.50	367.50	367.50	367.50	367.50	367.50	367.50
Initial Effective Stress, σ'_i (kPa / psf)	6,548	6,534	6,546	6,934	6,929	6,921	6,929	6,929	6,545	6,534	6,534
Final Effective Stress, σ'_f (kPa/psf)	6,913	6,886	6,897	7,274	7,269	7,259	7,276	7,276	6,911	6,900	6,900
Elastic Method											
Modulus, E (kPa/psf)=											
Strain											
Settlement (m / ft)											
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)	MS	MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)	3,961	3,988	3,988	3,990	3,990	3,994	3,997	3,997	4,001	4,001	4,001
Modified Primary Compression Index, C_{ce}	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460
Modified Recompression Index, C_{re}	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014
Modified Secondary Compression Index, $C_{\alpha\alpha}$	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%	0.91%
ratio of t_2 / t_1	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75
Settlements											
Primary Settlement, (m / ft)	0.054	0.052	0.052	0.048	0.048	0.048	0.049	0.049	0.054	0.054	0.054
Secondary Settlement (m / ft)	0.043	0.043	0.043	0.043	0.043	0.043	0.043	0.043	0.043	0.043	0.043
Total Settlement (m / ft)	0.097	0.095	0.095	0.091	0.091	0.090	0.092	0.092	0.097	0.097	0.097
Elastic or Plastic (E/P)											
Settlement of Layer 26 (m / ft)	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D
	0.097	0.095	0.095	0.091	0.091	0.090	0.092	0.092	0.097	0.097	0.097
Layer No.	27	Zone3-Below-GW-3									
Initial Stress Reference Layer (top of layer)	2	2	2	2	2	2	2	2	2	2	2
Final Stress Reference Layer (top of layer)	1	1	1	1	1	1	1	1	1	1	1
Midpoint Elevation, (m / ft)	365.00	365.00	365.00	365.00	365.00	365.00	365.00	365.00	365.00	365.00	365.00
Initial Effective Stress, σ'_i (kPa / psf)	6,597	6,583	6,595	6,983	6,978	6,970	6,978	6,978	6,594	6,583	6,583
Final Effective Stress, σ'_f (kPa/psf)	6,962	6,936	6,947	7,326	7,321	7,311	7,328	7,328	6,961	6,950	6,950
Elastic Method											
Modulus, E (kPa/psf)=											
Strain											
Settlement (m / ft)											
1-D Consolidation Theory (Plastic Method)											
Consolidation Properties											
OCR Manual or Auto Input (MW/MS: Manual waste/soil, A:Automatic)	MS	MS	MS	MS	MS	MS	MS	MS	MS	MS	MS
OCR Manual Input Value	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
OCR Computation Input											
Preconsolidation pressure, σ'_p (kPa / psf)	4,010	4,037	4,037	4,039	4,039	4,043	4,046	4,046	4,050	4,050	4,050
Modified Primary Compression Index, C_{ce}	0.380	0.380	0.380	0.380	0.380	0.380	0.380	0.380	0.380	0.380	0.380
Modified Recompression Index, C_{re}	0.021	0.021	0.021	0.021	0.021	0.021	0.021	0.021	0.021	0.021	0.021
Modified Secondary Compression Index, $C_{\alpha\alpha}$	0.70%	0.70%	0.70%	0.70%	0.70%	0.70%	0.70%	0.70%	0.70%	0.70%	0.70%
ratio of t_2 / t_1	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75	8.75
Settlements											
Primary Settlement, (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Secondary Settlement (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Total Settlement (m / ft)	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Elastic or Plastic (E/P)											
Settlement of Layer 27 (m / ft)	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D	1-D
	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000

Written by: **Yiwen Cao** Date: **12/17/2009** Reviewed by: **R. Kulasingam/Jay Beech** Date: **12/17/2009**

Client: **Honeywell** Project: **Onondaga Lake SCA Final Design** Project/ Proposal No.: **GJ4299** Task No.: **04**

LAYER SETTLEMENT	Layer No.	Material										
	1	Cover										
	2	Dredge										
	3	Gravel										
	4	Clay										
	5	Dike										
	6	Zone2-Above-GW-1	0.063	0.061	0.061	0.040	0.040	0.039	0.040	0.040	0.062	0.062
	7	Zone2-Above-GW-2	0.060	0.059	0.058	0.040	0.039	0.038	0.040	0.040	0.060	0.060
	8	Zone2-Above-GW-3	0.058	0.057	0.057	0.039	0.039	0.038	0.039	0.039	0.058	0.058
	9	Zone2-Above-GW-4	0.057	0.055	0.055	0.038	0.038	0.037	0.038	0.038	0.056	0.056
	10	Zone2-Above-GW-5	0.055	0.054	0.053	0.038	0.038	0.037	0.038	0.038	0.055	0.055
	11	Zone2-Above-GW-6	0.054	0.052	0.052	0.037	0.037	0.036	0.037	0.037	0.053	0.053
	12	Zone2-Above-GW-7	0.052	0.051	0.051	0.037	0.037	0.036	0.037	0.037	0.052	0.052
	13	Zone2-Above-GW-8	0.051	0.050	0.050	0.036	0.036	0.036	0.036	0.036	0.051	0.051
	14	Zone2-Above-GW-9	0.050	0.049	0.048	0.036	0.036	0.035	0.036	0.036	0.050	0.050
	15	Zone2-Above-GW-10	0.049	0.048	0.047	0.035	0.035	0.035	0.036	0.036	0.049	0.049
	16	Zone2-Above-GW-11	0.048	0.047	0.047	0.035	0.035	0.034	0.035	0.035	0.048	0.048
	17	Zone2-Above-GW-12	0.047	0.046	0.046	0.034	0.034	0.034	0.035	0.035	0.047	0.047
	18	Zone2-Above-GW-13	0.046	0.045	0.045	0.034	0.034	0.034	0.034	0.034	0.046	0.046
	19	Zone2-Above-GW-14	0.045	0.044	0.044	0.034	0.034	0.033	0.034	0.034	0.045	0.045
	20	Zone2-Above-GW-15	0.044	0.044	0.043	0.033	0.033	0.033	0.034	0.034	0.045	0.045
	21	Zone2-Above-GW-16	0.043	0.043	0.043	0.033	0.033	0.033	0.033	0.033	0.044	0.044
	22	Zone2-Above-GW-17	0.043	0.042	0.042	0.033	0.033	0.032	0.033	0.033	0.043	0.043
	23	Zone3-Above-GW-1	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	24	Zone3-Above-GW-2	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	25	Zone2-Below-GW-18	0.098	0.096	0.095	0.091	0.091	0.091	0.092	0.092	0.098	0.098
	26	Zone2-Below-GW-19	0.097	0.095	0.095	0.091	0.091	0.090	0.092	0.092	0.097	0.097
	27	Zone3-Below-GW-3	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	28											
	29	Soil Above GW										
	30	Soil Below GW										
	TOTAL SETTLEMENT		1.06	1.04	1.03	0.79	0.79	0.78	0.80	0.80	1.06	1.06
POST-SETTLEMENT ELEVATION (M/FT)	Line 1	Top of Final Cover	449.94	450.02	450.03	450.31	450.31	450.28	450.23	450.23	449.95	449.95
	Line 2	Top of Dredge	446.70	446.72	446.82	448.15	448.09	448.05	448.12	448.12	446.83	446.75
	Line 3	Top of Gravel	419.27	419.29	419.39	420.73	420.66	420.62	420.70	420.70	419.40	419.32
	Line 4	Top of Clay	412.95	412.78	412.88	406.34	406.15	406.11	406.19	406.31	412.89	412.81
	Line 5	Top of Dike	410.71	411.10	411.08	404.57	404.50	404.55	404.62	404.62	411.21	411.24
	Line 6	Top of Subgrade	410.71	411.10	411.08	404.57	404.50	404.55	404.62	404.62	411.21	411.24
	Line 7		408.61	408.98	408.96	402.82	402.76	402.80	402.87	402.87	409.08	409.11
	Line 8		406.51	406.85	406.83	401.07	401.01	401.06	401.12	401.12	406.95	406.97
	Line 9		404.41	404.73	404.70	399.33	399.27	399.31	399.37	399.37	404.82	404.84
	Line 10		402.30	402.60	402.58	397.58	397.53	397.56	397.62	397.62	402.68	402.70
	Line 11		400.19	400.47	400.45	395.83	395.78	395.82	395.87	395.87	400.54	400.56
	Line 12		398.08	398.33	398.32	394.08	394.04	394.07	394.12	394.12	398.40	398.42
	Line 13		395.97	396.20	396.18	392.33	392.29	392.32	392.36	392.36	396.26	396.28
	Line 14		393.86	394.06	394.05	390.58	390.55	390.57	390.61	390.61	394.12	394.13
	Line 15		391.75	391.93	391.92	388.83	388.80	388.82	388.86	388.86	391.98	391.99
	Line 16		389.63	389.79	389.78	387.08	387.05	387.07	387.10	387.10	389.83	389.84
	Line 17		387.52	387.65	387.64	385.33	385.31	385.32	385.35	385.35	387.69	387.70
	Line 18		385.40	385.51	385.51	383.58	383.56	383.57	383.59	383.59	385.54	385.55
	Line 19		383.28	383.37	383.37	381.83	381.81	381.82	381.84	381.84	383.40	383.40
	Line 20		381.16	381.23	381.23	380.08	380.06	380.07	380.08	380.08	381.25	381.25
	Line 21		379.05	379.09	379.09	378.32	378.32	378.32	378.33	378.33	379.10	379.11
	Line 22		376.93	376.95	376.95	376.57	376.57	376.57	376.57	376.57	376.95	376.96
	Line 23	Bottom of Zone2 Above GW	374.81	374.81	374.81	374.82	374.82	374.82	374.82	374.82	374.81	374.80
	Line 24		374.81	374.81	374.81	374.82	374.82	374.82	374.82	374.82	374.81	374.80
	Line 25	Bottom of Zone 3 Above GW	374.81	374.81	374.81	374.82	374.82	374.82	374.82	374.82	374.81	374.80
	Line 26		369.90	369.90	369.90	369.91	369.91	369.91	369.91	369.91	369.90	369.90
	Line 27	Bottom of Zone 2 Below GW	365.00	365.00	365.00	365.00	365.00	365.00	365.00	365.00	365.00	365.00
	Line 28	Top of Incompressible Layer	365.00	365.00	365.00	365.00	365.00	365.00	365.00	365.00	365.00	365.00
	Line 29	GND										
	Line 30	GW										
	Line 31	ROCK										